

Denso Hair Pin Exploded View

104210 & 421000 Series

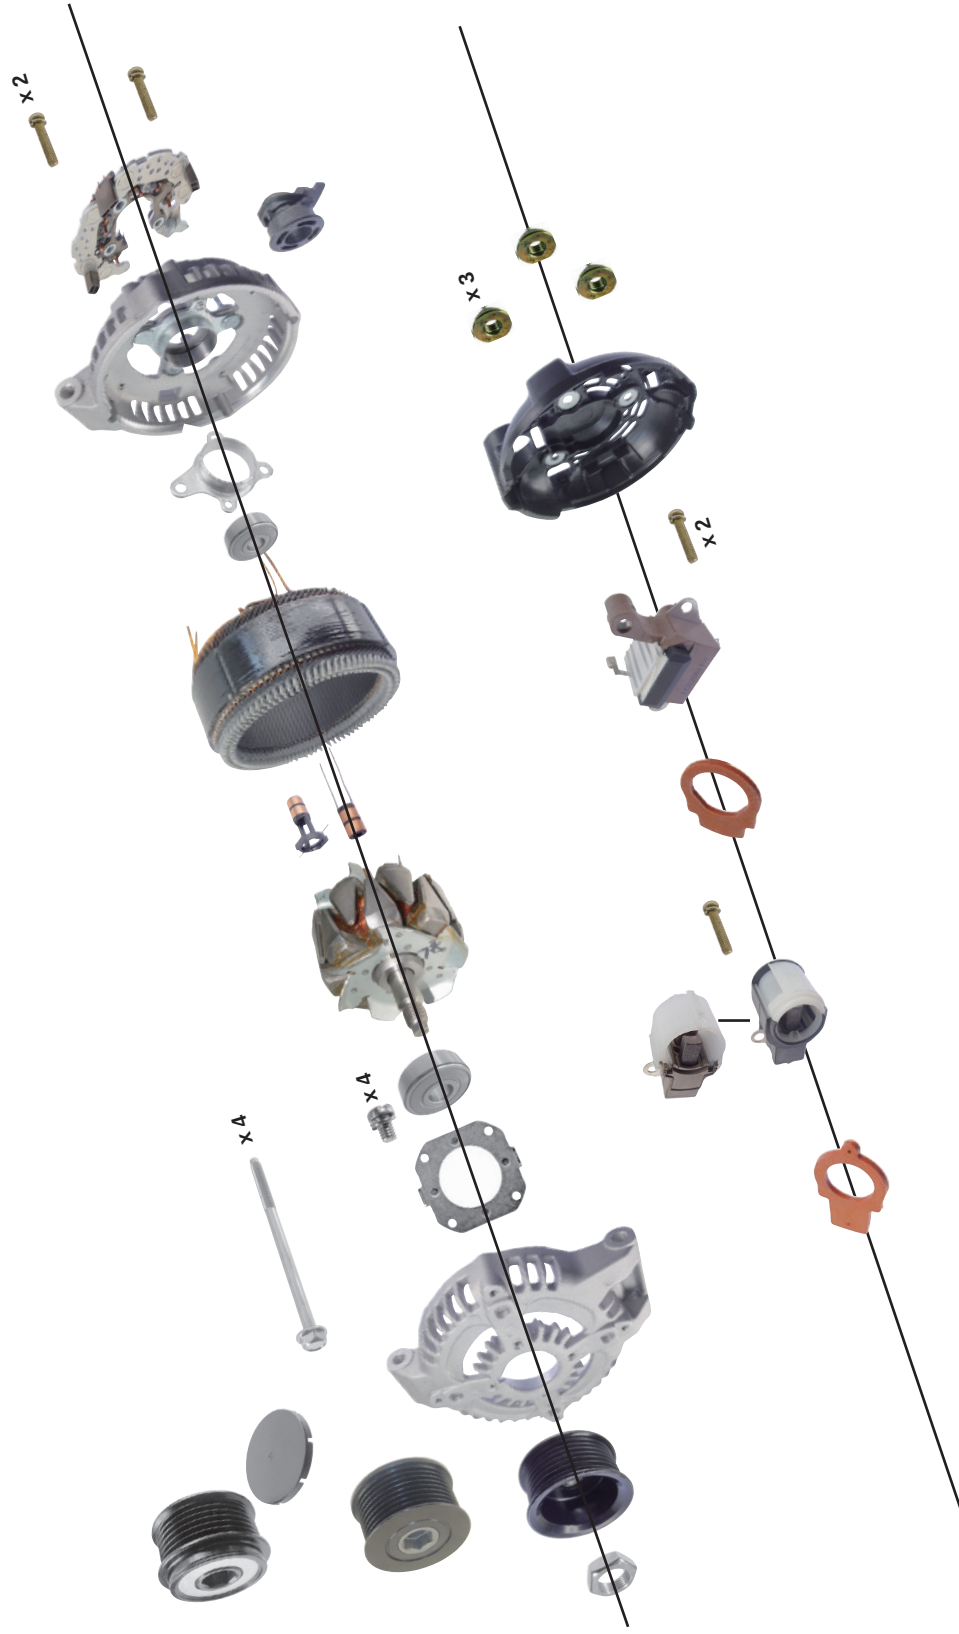


Table of Contents

Exploded View.....	I
Drive End Housing (21-)	
BMW / VOLVO	1
CHRYSLER / DODGE / JEEP / RAM	2-4
FORD / LINCOLN.....	5-6
BUICK / CADILLAC / CHEVY / GM / GMC / SATURN / PONTIAC	8-10
HONDA / ACURA	11
TOYOTA / LEXUSA / SUBARU	12-14
HYUNDAI / LANDROVER / JAGUAR / JOHN DEERE	15
Slip Ring End Housing (22-)	
BMW / VOLVO	16
CHRYSLER / DODGE / JEEP / RAM	18-19
FORD / LINCOLN.....	20-21
BUICK / CADILLAC / CHEVY / GM / GMC / SATURN / PONTIAC	22-23
HONDA / ACURA	24
TOYOTA / LEXUS / SUBARU	25-27
HYUNDAI / LANDROVER / JAGUAR / JOHN DEERE	28-29
Clutch/Decoupler Pulley (24CP/DP-)	30-38
Tools for Clutch Pulley (24CAP- /TL24-)	38
Pulley (24-)	39-41
Stator (27-)	42-43
Slip Ring (28-)	44
Rotor (30-)	45
Rectifier (31-)	46-48
Rectifier Repair Parts and Kits (31-)	50
Diode (32-)	51
Regulator (35-)	52-57
Terminal Block (46-)	58
Brush Holedr and Seals (38-, 39-, 41-)	59-60
Insulator (42-)	61-65
SRE Cover (46-)	66-78
Bearing (10-)	79
Bearing Retainer Parts (46-)	80
Misc. Parts (46-)	81-82
B+ Terminal Post (84-)	83-84
Rectifier Nut (85-)	85-86

Table of Contents

Hardware

Screw, Bolt (84-)	87-88
Nut (85-)	89-90

Performance Parts

Drive End Housing (21-)	91-92
Pulley (24-).....	92-93
Stator (27-)	93
Rotor (30-)	94
Rectifier (31-)	95
Regulator (35-)	95

21-Drive End Housing

BMW / VOLVO		
 21-82161 DE Housing 170-210 Amp, 138mm Stator OD Used on: BMW OE: 104210-6070~072, 104210-6240 104210-6500~504, 104210-6514 104210-6750~752, 104210-6050~052 104210-6520~522 Lester: 11496, 11712, 11752, 11753, 11779, 11951, 21272 Ref: AN-04153	 21-82106 DE Housing 150 Amp, 128.5mm Stator OD Used on: Volvo Replaces: OE: 104210-356, 104210-464 Lester: 11054, 11093, 11798 Ref: AN-0386	
 21-82162 DE Housing 210 Amp, 138mm Stator OD Used on: BMW OE: 104210-6250, 6251, 6254, 6440, 104210-6441, 6442, 6580 Lester: 11751, 11791 Ref: AN-03150	Photo Coming Soon 21-82154 DE Housing 28.5mm Stator OD Used on: Volvo Replaces: OE: 104210-405 Lester: 11093 Note: duplicated to 21-82106 leave 21-82154 blank	

CHRYSLER / DODGE / RAM / JEEP



21-82084

DE Housing

130-160 Amp, 128.5mm Stator OD

Used on: Chrysler, Dodge

Replaces: 121400-2630, 121401-0080

OE: 104210-424; 421000-001, -002, 421000-012, -013, -022, -049

Lester: 13870, 13871, 11114

Ref: AZ-0378



21-82102-1

DE Housing

145-160 Amp, 128.5mm Stator OD

Used on: Chrysler, Dodge

Replaces:

OE: 421000-021, 041, 051, 052, 058, 421000-067, 073

Lester: 11297, 11299, 11378, 11389, 11448, 11449, 11583, 11756, 13988

Ref: AZ-0389



21-82123

DE Housing

150-160 Amp, 128.5mm Stator OD


Used on: Jeep

Replaces:

OE: 421000-036, -055, -066

Lester: 11155, 11241

Ref: AZ-03105



21-82096

DE Housing

180-220 Amp, 138mm Stator OD

Used on:

Replaces: Dodge Truck

OE: 421000-700, 421000-701

Lester: 11379, 11380, 11680, 11754, 11755, 14027

Ref: AZ-03126



21-82103

DE Housing

130-160 Amp, 128.5mm Stator OD

Used on: Chrysler, Dodge

Replaces:

OE: 421000-025, -026, -034, -062, -063

Lester: 11112, 11113, 11382, 11383, 11506

Ref: AZ-0392



21-82124

DE Housing

160 Amp, 128.5mm Stator OD

Used on: Chrysler, Dodge, Jeep

Replaces:

OE: 421000-004, -010, -032, -044, -047 421000-050, -053, -060, -071

Lester: 11240, 11277, 13912, 13913

Ref: AZ-0376



21-82098

DE Housing

136 Amp, 128.5mm Stator OD

Used on: Chrysler Pacifica

Replaces:

OE: 421000-014, 421000-030

Lester: 11063, 11243, 11294, 11295

Ref: AZ-0395

Note: wo/ mounting ear, please use 21-82145



21-82120

DE Housing

160 Amp, 128.5mm Stator OD

Used on: Chrysler, Dodge, Jeep

Replaces:

OE: 421000-075

Lester: 11572

Ref: AZ-03136



21-82129

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Chrysler, Dodge

Replaces:

OE: 421000-039, -046, -065

Lester: 11286, 11381, 11401

Ref: AZ-03129

21-Drive End Housing

CHRYSLER / DODGE / RAM / JEEP

 21-82132 DE Housing 160 Amp, 128.5mm Stator OD Used on: Chrysler, Dodge, Lancia, VW Replaces: OE: 421000-077 Lester: 11570, 11580 Ref: AJ-03134	 21-82139 DE Housing 180 Amp, 138mm Stator OD Used on: Chrysler, Dodge, Jeep Replaces: OE: 421000-702, 421000-703 Lester: 11575, 11576 Ref: AZ-03132	 21-82149 DE Housing 180-220 Amp, 138mm Stator OD Used on: Replaces: OE: 421000-704, 421000-705 Lester: 11592, 11598, 20276 Ref: AZ-03133
 21-82134 DE Housing 160 Amp, 128.5mm Stator OD Used on: Chrysler, Dodge Replaces: OE: 421000-005, -011, -015, -020, -037 Lester: 11040, 11244, 13914, 13915 Ref: AZ-0377	 21-82145 DE Housing 160 Amp, 128.5mm Stator OD Used on: Chrysler, Dodge Replaces: OE: 421000-0480 Lester: 11296 Ref: AZ-03121 Note: w/ mounting ear, please use 21-82098	Photo Coming Soon 21-82151 DE Housing 140 Amp, 128.5mm Stator OD Used on: Chrysler, Dodge Replaces: OE: 4896803AC Lester: 11506 Ref: AZ-03142
 21-82138 DE Housing 130-160 Amp, 128.5mm Stator OD Used on: Chrysler, Dodge Replaces: OE: 421000-012, -018, -019 Lester: 11039, 11048, 13923 Ref: AZ-0380	 21-82146 DE Housing 150 Amp, 128.5mm Stator OD Used on: Chrysler, Dodge Replaces: OE: 421000-080 Lester: 11574 Ref: AZ-03141	 21-82155 DE Housing 160 Amp, 128.5mm Stator OD Used on: Jeep Replaces: 021041-6780, 021041-6950 OE: 421000-081 Lester: 11584 Ref: AZ-03142 Note: 11584 is a CCW unit

CHRYSLER / DODGE / RAM / JEEP



21-82164

DE Housing

160 Amp, 128.5mm Stator OD

Used on: Chrysler, Jeep

OE: 421000-0820, 421000-0821

Lester: 12886

Ref: AZ-03147



21-82182

DE Housing

120 Amp, 128.5mm Stator OD

Used on: Chrysler, Sebring

OE: 104210-1750

Lester: 11585

Ref: AN-03145



21-82192

DE Housing

220-240 Amp, 138mm Stator OD

Used on: Jeep, Wrangler

OE: 421000-7221, 421000-7231

Lester: 21024, 21025

Photo
Coming Soon

21-82177

DE Housing

140 Amp, 128.5mm Stator OD

Used on: Dodge, Fiat

OE: 104211-8000

Lester: 11594



21-82183

DE Housing

180/220 Amp, 138mm Stator OD

Used on: Ram, Promaster

OE: 421000-7110, 421000-7120

Lester: 11792, 11793

Ref: AN-03190



21-82196

DE Housing

220-240 Amp, 138mm Stator OD

Used on: Chrysler, Voyager, Ram, Promaster

OE: 421000-7181

Lester: 11940

Ref: AN-03158



21-82180

DE Housing

120 Amp, 128.5mm Stator OD

Used on: Chrysler, Sebring

OE: 121000-2520, 421000-0060, 0061, 421000-0062, 0230, 0232, 0740 5-121000-252

Lester: 13868

Ref: AZ-0372



21-82185

DE Housing

180 Amp, 138mm Stator OD

Used on: Jeep

OE: 421000-7090

Lester: 11749, 12887

Ref: AZ-03146

21-Drive End Housing

FORD / LINCOLN

**21-82099**

DE Housing

195 Amp, 138mm Stator OD

Used on: Ford E Series Truck

Replaces:

OE: 104210-618

Lester: 11434, 11534

Ref: AE-0364

Note: replace to Ford 7773, 7781, 8251,
8313, 8314, 9436.
128.5mm use 21-82122

**21-82117**

DE Housing

150 Amp, 138mm Stator OD

Used on: Ford, Lincoln

Replaces:

OE: 104210-470, 104210-563

Lester: 11273, 11430, 11431

Ref: AE-0332

Note: use 21-82202

**21-82143**

DE Housing

180-225 Amp, 138mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-622, -634, -660, -667

Lester: 11624, 11627, 11629, 11630,
11763, 11918, 11963, 20838,
41004, 41005, 44005, 44007,
44014, 8913

Ref: AE-0365

**21-82109**

DE Housing

125 Amp, 128.5mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-543, 104211-989

Lester: 11291, 11429, 44021

Ref: AE-0330

**21-82122**

DE Housing

Amp, 138mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-111, -586, -597

Lester: 11204, 11292, 11368, 11432,
11527, 11876

Ref: AE-0349

Note: use 21-82099

**21-82156**

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Ford Mustang

Replaces:

OE: 104210-297

Lester: 11623, 11624, 11625, 11626,
11759

Ref: AE-0381

**21-82115**

DE Housing

200 Amp, 138mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-6100, 104210-6103

Lester: 11290, 11620, 11641, 11549,
12893

Ref: AE-0331

**21-82141**

DE Housing

220 Amp, 138mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-627

Lester: 11532, 11679, 11867, 44000,
44001

Ref: AE-0354

Photo
Coming Soon

21-82159

DE Housing

130 Amp, 128.5mm Stator OD

Used on: Ford Freestyle

Replaces:

OE: 104210-4090, 104210-4091,
104210-5300

Lester: 11238

Ref: AE-0328

21-Drive End Housing

FORD (American)

FORD / LINCOLN



21-82160
DE Housing

175 Amp, 138mm Stator OD

Used on: Ford Truck, Lincoln Truck

Replaces:

OE: 104210-6561, 104211-0310

Lester: 11664, 11665, 20268, 21029, 21030

Ref: AE-0377



21-82176
DE Housing

150 Amp, 138mm Stator OD

Used on: Ford Escape

Replaces:

OE: 104210-2330, 104210-2910, 2911

Lester: 11636, 11666

Ref: AE-0376

Note: use 21-82179

Photo
Coming Soon

21-82184
DE Housing

200 Amp, 138mm Stator OD

Used on: Ford Explorer

Replaces:

OE: 104210-6411

Lester: 11616

Ref: AE-0379



21-82163
DE Housing

140 Amp, 128.5mm Stator OD

Used on: Lincoln LS

Replaces:

OE: 104210-3210, 104210-3213, 104210-4160

Lester: 11000

Ref: AE-0323



21-82179
DE Housing

170 Amp, 128.5mm Stator OD

Used on: Ford Fusion

Replaces:

OE: 104210-6690

Lester: 11667, 12884

Ref: AE-0387

Note: use 21-82176

Photo
Coming Soon

21-82200
DE Housing

200 Amp, 138mm Stator OD

Used on: Ford Mustang

Replaces:

OE: 104210-6910, 104211-1151, 104211-0760, 104211-0761

Lester: 11887, 11943

Photo
Coming Soon

21-82167
DE Housing

175 Amp, 138mm Stator OD

Used on: Ford Mustang

Replaces:

OE: 104210-6840, 104211-6840, 104211-6841

Lester: 22138



21-82181
DE Housing

157 Amp, 128.5mm Stator OD

Used on: Ford F-450, F-550, F-250, F-350

Replaces:

OE: 104210-2920, 104210-2930

Lester: 11622, 11628

Ref: AE-0371



21-82201
DE Housing

150 Amp, 128.5mm Stator OD

Used on: Ford Mustang

Replaces:

OE: 104210-5840

Lester: 11428, 11433, 11526

DE
SRE
CLUTCH PULLEY
Cap & Tool for Clutch Pulley
Solid PULLEY
Stator
Slip Ring
Rotor
Rectifier and Parts
Diode
Regulator Terminal Block
Brush Holder and Parts
Insulator
SRE COVER
Misc. Pars
B+ Term. Post & Nut
Hardware

21-Drive End Housing

DE
SRE
CLUTCH Cap & Tool PULLEY for Clutch
Solid PULLEY
Stator
Slip Ring
Rotor
Rectifier and Parts
Diode
Regulator , Terminal Block
Brush Holder and Parts
Insulator
SRE COVER
Misc. Parts Post & Nut
Hardware

FORD / LINCOLN		
 21-82202 DE Housing 240 Amp, 138mm Stator OD Used on: Ford Mustang Replaces: OE: 104211-0500, 104211-0501 Lester: 11878 Note: 128.5mm use 21-82117		

21-Drive End Housing

GM (American)

BUICK / CADILLAC / CHEVY / GM / GMC / SATURN / PONTIAC



21-82107

DE Housing

220 Amp, 138mm Stator OD

Used on: GM Cadillac

Replaces:

OE: 104210-600

Lester: 11181

Ref: AT-03301

Note: 128.5mm type, use 21-82136



21-82125

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Cadillac

Replaces:

OE: 104210-326

Lester: 11038, 11248

Ref: AJ-03127

Note:



21-82135

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Pontiac

Replaces:

OE: 104210-499, 104210-507

Lester: 11146, 11156

Ref: AJ-03120



21-82116

DE Housing

130 Amp, 128.5mm Stator OD

Used on: Cadillac

Replaces: 121401-0592

OE: 104210-328, 104210-540(early)

Lester: 11003, 11037, 11513

Ref: AJ-03129



21-82128

DE Housing

130-140 Amp, 128.5mm Stator OD

Used on: Chevy, Pontiac, Saturn

Replaces:

OE: 104210-414, -433, -441, -442

Lester: 11109, 11110, 11140

Ref: AJ-03135

Note:



21-82136

DE Housing

140-150 Amp, 128.5mm Stator OD

Used on: Buick, Cadillac, Pontiac

Replaces:

OE: 104210-306, 104210-437

Lester: 11178, 13919

Ref: AJ-03100

Note: 138mm type, use 21-82107



21-82118

DE Housing

170 Amp, 138mm Stator OD

Used on: Buick, Chevy, GM, Saturn

Replaces:

OE: 104210-616

Lester: 11251, 11252, 11645

Ref: AJ-03160

Note: 128.5mm use 21-82144



21-82130

DE Housing

136 Amp, 128.5mm Stator OD

Used on: Buick, Chevy

Replaces:

OE: 104210-422

Lester: 11179

Ref: AJ-03145



21-82142

DE Housing

140 Amp, 128.5mm Stator OD

Used on: Buick

Replaces:

OE: 104210-225

Lester: 11367

Ref: AJ-03166

DE

SRE

CLUTCH
PULLEY

Cap & Tool
for Clutch
Pulley

Solid
PULLEY

Stator

Slip Ring

Rotor

Rectifier
and Parts

Diode

Regulator
Terminal
Block

Brush
Holder
and Parts

Insulator

SRE
COVER

Misc. Pars

B+ Term.
Post & Nut

Hardware

21-Drive End Housing

BUICK / CADILLAC / CHEVY / GM / GMC / SATURN / PONTIAC



21-82140
DE Housing

170 Amp, 138mm Stator OD
Used on: Chevy, GMC Truck
Replaces:
OE: 104210-687
Lester: 14009, 14020, 44004, 44006
Ref: AJ-03197
Note: 128.5mm use 21-82148



21-82148
DE Housing

140-150 Amp, 128.5mm Stator OD
Used on: Chevy, Cadillac
Replaces:
OE: 104210-200, -319, -332, -539, -813
Lester: 11785, 11981, 14007
Ref: AJ-03179
Note: 138mm use 21-82140



21-82171
DE Housing

150 Amp, 128.5mm Stator OD
Used on: Chevrolet
Replaces:
OE: 104211-8360
Lester: 11794
Ref: AJ-03196
Note:



21-82144
DE Housing

150 Amp, 128.5mm Stator OD
Used on: GM
Replaces:
OE: 104210-541
Lester: 11250
Ref: AJ-03156
Note: 138mm use 21-82118

Photo
Coming Soon

21-82166
DE Housing

140 Amp, 128.5mm Stator OD
Used on: Buick, Pontiac
Replaces:
OE: 104210-3300, 104210-3310,
104210-4360, 104210-4540
Lester: 11035, 11036, 11180



21-82188
DE Housing

150 Amp, 128.5mm Stator OD
Used on: Chevrolet
Replaces:
OE: 104211-8900, 104211-8901,
104211-8902, 104211-8903
Lester: 44015



21-82147
DE Housing

150 Amp, 128.5mm Stator OD
Used on: Cadillac
Replaces:
OE: 104210-200, 319, 332, 435, 443,
104210-539, 813
Lester: 11044, 11046, 11369, 11508,
11787, 14021, 11508, 14021
Ref: AJ-03142



21-82169
DE Housing

150 Amp, 128.5mm Stator OD
Used on: Buick, Cadillac, Chevrolet,
GMC
Replaces:
OE: 104210-1960, 104210-1962
Lester: 11681, 11682, 11795, 11964,
14883
Ref: AJ-03178



21-82205
DE Housing

138mm Stator OD
Used on: Cadillac
Replaces:
OE: 104211-0670, 104211-0671,
104211-0672
Lester: 11780
Ref:

21-Drive End Housing

BUICK / CADILLAC / CHEVY / GM / GMC / SATURN / PONTIAC

**Photo
Coming Soon**

21-82206

DE Housing

138mm Stator OD

Used on: Cadillac, Chevrolet, GCM

Replaces:

OE: 104211-0261

Lester: 44019

Ref:

**Photo
Coming Soon**

21-82207

DE Housing

138mm Stator OD

Used on: Chevrolet, GCM

Replaces:

OE: 104211-0720, 104211-0721,

TN104211-0721

84122172, 84331736

Lester: 11982

Ref:

**Photo
Coming Soon**

21-82208

DE Housing

138mm Stator OD

Used on: Chevrolet, GCM

Replaces:

OE: 104210-6850, 104210-6851,


22949468

Lester: 14019

Ref:

DE
SRE
CLUTCH PULLEY
Cap & Tool for Clutch Pulley
Solid PULLEY
Stator
Slip Ring
Rotor
Rectifier and Parts
Diode
Regulator Terminal Block
Brush Holder and Parts
Insulator
SRE COVER
Misc. Pars
B+ Term. Post & Nut
Hardware

21-Drive End Housing


DE		HONDA / ACURA		
SRE CLUTCH Cap & Tool PULLEY for Clutch Pulley Solid PULLEY	 21-82113 DE Housing 130 Amp, 128.5mm Stator OD Used on: Acura, Honda Replaces: OE: 104210-124, -160, -189, -199, -310, 104210-350, -377, -429, -830, -851, Lester: 11030, 11062, 11099, 11150, 11151, 11391, 11392, 11573, 11600, 11670, 11671, 11672, 11773, 11774, 11775 Ref: AH-03123	 21-82112 DE Housing 130 Amp, 128.5mm Stator OD Used on: Honda Accord Replaces: OE: 104210-589 Lester: 11390 Ref: AH-03132 Note:	 21-82191 DE Housing 130 Amp, 120mm Stator OD Used on: Honda Replaces: OE: 104210-1540 Lester: 21740 Ref: Note:	
	Stator Slip Ring Rotor Rectifier and Parts Diode Regulator, Terminal Block Brush Holder and Parts	 21-82087 DE Housing 105 Amp, 128.5mm Stator OD Used on: Acura, Honda Replaces: 121401-0920 OE: 104210-1530, 104210-4732 Lester: 11503, 11604, 13980 Ref: AH-03113 Note:	 21-82168 DE Housing 135 Amp, 120mm Stator OD Used on: Acura, Honda Replaces: OE: 104211-3470 Lester: 21154 Ref: Note:	Photo Coming Soon 21-82204 DE Housing 110 Amp, 120mm Stator OD Used on: Acura, Honda Replaces: OE: 104211-4310 Lester: 11965 Ref: AH-03163 Note:
	Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	 21-82095 DE Housing 130 Amp, 128.5mm Stator OD Used on: Replaces: Acura MDX, Honda Odyssey OE: 104210-309 Lester: 13918 Ref: AH-03107 Note:	 21-82170 DE Housing 135 Amp, 120mm Stator OD Used on: Honda Replaces: OE: 104211-3960, 104211-3910 Lester: 11930, 11931 Ref: Note:	

21-Drive End Housing

TOYOTA / LEXUS

**21-82085**

DE Housing

130-150 Amp, 128.5mm Stator OD**Used on:** Lexus GX, Toyota 4Runner
Replaces:**OE:** 104210-303, 338, 339, 344, 346
104210-368, 451, 511, 512
104210-4000, 4001**Lester:** 13983, 13992, 13994, 11087,
11090, 11153, 11197, 11198**Ref:** AT-03274**21-82089**

DE Housing

100-150 Amp, 128.5mm Stator OD**Used on:** Lexus, Toyota**Replaces:****OE:** 104210-304, -312, -345, -362, -379,
104210-418, -419**Lester:** 13905, 13927, 13981, 11032, 11033**Ref:** AT-03266, AT-03275**Note:** DE w/ Ear Ring.**21-82110**

DE Housing

150 Amp, 128.5mm Stator OD**Used on:** Lexus**Replaces:****OE:** 104210-205, 104210-468**Lester:** 11196**Ref:** AT-03306**21-82086**


DE Housing

100-130 Amp, 128.5mm Stator OD**Used on:** Toyota Tacoma, 4Runner**Replaces:** 121401-1090**OE:** 104210-347, 104210-420,
104210-423, 104210-492**Lester:** 13984, 11138, 11139, 11324,**Ref:** AT-03280**21-82097**

DE Housing

100-140 Amp, 128.5mm Stator OD**Used on:** Toyota Camry, Solara**Replaces:****OE:** 104210-497, -481, -533**Lester:** 11034, 11195, 11201**Ref:** AT-03295**Note:** DE wo/ Ear Ring.DE w/ Ear Ring please use
21-82088**21-82114**

DE Housing

100 Amp, 128.5mm Stator OD**Used on:** Pontiac, Scion, Toyota**Replaces:****OE:** 104210-548, 104210-549**Lester:** 11385, 11386**Ref:** AT-03325**21-82088**

DE Housing

100 Amp, 128.5mm Stator OD**Used on:** Toyota RAV4**OE:** 104210-378, -388, -389, -403, -481**Lester:** 11084, 11088, 11034, 11195, 11201**Ref:** AT-03295**Note:** DE w/ Ear Ring.DE wo/ Ear Ring please use
21-82097**21-82104**

DE Housing

100-150 Amp, 128.5mm Stator OD**Used on:** Lexus, Toyota**Replaces:****OE:** 104210-209, -214, -447, -457, -474,
104210-475, 104210-551**Lester:** 11136, 11137, 11322, 11323,
11325, 11326**Ref:** AT-03308**21-82119**

DE Housing

180 Amp, 138mm Stator OD**Used on:** Lexus, Toyota**Replaces:****OE:** 104210-614**Lester:** 11405, 21353**Ref:** AT-03343

21-Drive End Housing

DE

SRE

CLUTCH
PULLEY
Cap & Tool
for Clutch
PulleySolid
PULLEY

Stator

Slip Ring

Rotor

Rectifier
and
Parts

Diode

Regulator
, Terminal
BlockBrush
Holder
and Parts

Insulator

SRE
COVERMisc. Parts
B+ Term.
Post & Nut

Hardware

TOYOTA

**21-82121**

DE Housing

80 Amp, 110.7mm Stator OD

Used on: Toyota Tacoma

Replaces:

OE: 104210-811, 104210-823

Lester: 11194, 11354

Ref: AT-03255

Note: This unit is aluminum SRE Cover but with Hair Pin Stator.**21-82133**

DE Housing

100 Amp, 128.5mm Stator OD

Used on: Toyota

Replaces:

OE: 104210-284

Lester: 11514, 11517, 11764

Ref: AT-03346

Note:Photo
Coming Soon**21-82172**

DE Housing

130 Amp, 120mm Stator OD

Used on: Toyota Tacoma

Replaces:

OE: 104211-3761

Lester: 21247

Ref:

Note:**21-82126**

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Toyota

Replaces:

OE: 104210-508, -509, -510

104210-2821, 2830

Lester: 11350, 11351, 11352, 11765

11520, 11521

Ref: AT-03333

**21-82157**

DE Housing

125 Amp, 120mm Stator OD

Replaces:

Used on: Toyota

OE: 104211-3301

Lester: 11776, 11777

Ref: AT-03361

Note:**21-82173**

DE Housing

180 Amp, 138mm Stator OD

Replaces:

Used on: Toyota Land Cruiser

OE: 104210-6150, DAN1209

Lester: 21858

Ref:

Note:**21-82131**

DE Housing

100 Amp, 128.5mm Stator OD

Used on: Toyota

Replaces:

OE: 104210-227, 234, 236, 843

Lester: 11384, 11400, 11402, 11403,

11404, 11407, 11408, 11516,

11519, 11595

Ref: AT-03326

**21-82165**

DE Housing

80 Amp, 110.7mm Stator OD

Used on: Toyota Yaris

Replaces:

OE: 104210-8180

Lester: 11203, 11505

Ref: AT-03322

Note:**21-82178**

DE Housing

180 Amp, 138mm Stator OD

Used on: Lexus

Replaces:

OE: 104210-6130, 104210-6131,

104210-6170, 104210-6173,

104210-6781, DAN1210

Lester: 11328, 11406, 11761

TOYOTA / LEXUS / SUBARU



21-82194

DE Housing

180 Amp, 128.5mm Stator OD

Used on: Toyota Highlander

Replaces:

OE: 104211-0971

Lester: 21248

Ref: AT-03384

Photo
Coming Soon

21-82186

DE Housing

130 Amp, 120mm Stator OD

Used on: Subaru Impreza

Replaces:

OE: 104211-4510

Lester: 21120, 41002

Ref: AS-0362

Note:



21-82195

DE Housing

125 Amp, 120mm Stator OD

Used on: Toyota RAV4

Replaces:

OE: 104211-3290, 3291, 3293, 3161,
104211-3541

Lester: 11778, 14486, 14487

Ref: AT-03366



21-82199

DE Housing

100 Amp, 120mm Stator OD

Used on: Toyota Camry, Corolla, RAV4

Replaces:

OE: 104211-4160, 104211-4170,
104211-4420

Lester: 11941, 11977

Ref: AT-03391

Note:

21-Drive End Housing

HYUNDAI / LANDROVER / JAGUAR / JOHN DEERE

**21-82111**

DE Housing

Amp, 128.5mm Stator OD

Used on: Hyundai, Kia

Replaces:

OE: 104210-180, 287, 564,
-581

Lester: 11387, 11524, 11591, 11686

Ref: AN-03148

**21-82108**

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Landrover

Replaces:

OE: 104210-369, 104210-370

Lester: 11205, 11206, 11569, 24028

Ref: AN-03109

Photo
Coming Soon**21-82090**

DE Housing

140 Amp, 128.5mm Stator OD

Used on: Jaguar S-Style, XJ8, XJR..

Replaces:

OE: 104210-308, 320, 415, 491, 504

Lester: 13978, 13979

Ref: AE-0322

**21-82175**

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Hyundai, Kia

Replaces:

OE: 104211-8790

Lester: 11953, 11980

Ref: AN-03177

**21-82190**

DE Housing

180 Amp, 138mm Stator OD

Used on: Landrover

Replaces:

OE: 104210-6420

Lester: 11762, 14016, 21032

Ref: AN-03186

**21-82101**

DE Housing

150 Amp, 128.5mm Stator OD

Used on: John Deere

Replaces: 121401-0780

OE: 104210-392

Lester: 12660

Ref: AN-03113

**21-82197**

DE Housing

180 Amp, 138mm Stator OD

Used on: Hyundai, Kia

Replaces:

OE: 104210-6191

Lester: 11353, 11523

Ref: AN-03121

**21-82198**

DE Housing

150 Amp, 128.5mm Stator OD

Used on: Landrover

OE: 021080-0080, 2330, 2331

104210-1470, 5360, 5361

Lester: 11509, 11529, 11530, 11588,
11985

Ref: AN-03131

BMW / VOLVO



22-82161

SRE Housing

170-210 Amp, 138mm Stator OD

Used on: BMW

OE: 104210-6070~072, 104210-6240
104210-6500~504, 104210-6514
104210-6750~752, 104210-6050~052
104210-6520~522

Lester: 11712, 11750

Ref: AN-03153



22-82106A

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Volvo

Replaces:

OE: 104210-356

Lester: 11054

Note: 104210-464 use 22-82106B



22-82162

SRE Housing

210 Amp, 138mm Stator OD

Used on: BMW

OE: 104210-6250, 104210-6251,
104210-6254, 104210-6440,
104210-6441, 104210-6442,
104210-6580

Lester: 11751, 11791

Ref: AN-03150

Photo
Coming Soon

22-82106B

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Volvo

Replaces:

OE: 104210-464

Lester: 11054

Note: 104210-356 use 22-82106A

Photo
Coming Soon

22-82154

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Volvo

Replaces:

OE: 104210-4050

Lester: 11093, 11798

Ref: AN-0486

DE

SRE

CLUTCH
PULLEY

Cap & Tool
for Clutch
Pulley

Solid
PULLEY

Stator

Slip Ring

Rotor

Rectifier
and Parts

Diode

Regulator
Terminal
Block

Brush
Holder
and Parts

Insulator

SRE
COVER

B+ Term.
Post & Nut

Misc. Pars

Hardware

22-Slip Ring End Housing

CHRYSLER / DODGE / RAM / JEEP

**22-82084**

SRE Housing

130-160 Amp, 128.5mm Stator OD**Used on:** Chrysler, Dodge, Jeep**Replaces:** 021500-7100**OE:** 104210-424; 421000-001, -002, 421000-022, -049**Lester:** 13870, 13871, 11114**Ref:** AZ-0478**22-82100**


SRE Housing

145-160 Amp, 128.5mm Stator OD**Used on:** Chrysler, Dodge**Replaces:****OE:** 421000-025, -026, -034, -062, -063, 421000-067**Lester:** 11112, 11113, 11382, 11383, 11449**Ref:** AZ-0492**22-82123**

SRE Housing

150-160 Amp, 128.5mm Stator OD**Used on:** Jeep**Replaces:****OE:** 421000-036, -055, -066**Lester:** 11155, 11241**Ref:** AZ-04105**22-82095**

SRE Housing

136 Amp, 128.5mm Stator OD**Used on:** Chrysler**Replaces:****OE:** 421000-014, 421000-030**Lester:** 11063, 11243, 11294, 11295, 11296**Ref:** AZ-0495**22-82102**

SRE Housing

180-220 Amp, 138mm Stator OD**Used on:** Chrysler, Dodge Ram Truck**Replaces:****OE:** 421000-700, 701, 714**Lester:** 11379, 11380, 11775**Ref:** AZ-04126**Note:** 128.5mm use 22-82099**22-82124**

SRE Housing

160 Amp, 128.5mm Stator OD**Used on:** Chrysler, Dodge, Jeep**Replaces:****OE:** 421000-004, 010, 032, 044, 047 421000-050, -053, -0600, -071**Lester:** 11240, 11276, 11277, 11504, 13912, 13913**Ref:** AZ-0476**22-82099**

SRE Housing

145-160 Amp, 128.5mm Stator OD**Used on:** Chrysler, Dodge**OE:** 421000-021, 041, 051, 052, 058, 421000-073**Lester:** 11297, 11298, 11299, 11378, 11389, 11448, 11583, 11756, 13988**Ref:** AZ-0489**22-82120**

SRE Housing

160 Amp, 128.5mm Stator OD**Used on:** Chrysler, Dodge, Jeep**Replaces:****OE:** 421000-075**Lester:** 11572, 11937**Ref:** AZ-04136**22-82129**

SRE Housing

150 Amp, 128.5mm Stator OD**Used on:** Chrysler, Dodge**Replaces:****OE:** 421000-065**Lester:** 11286, 11381, 11401**Ref:** AZ-04129

22-Slip Ring End Housing

CHRYSLER (American)

CHRYSLER / DODGE / RAM / JEEP



22-82132

SRE Housing

160 Amp, 128.5mm Stator OD

Used on: Crysler, Dodge

Replaces:

OE: 421000-077

Lester: 11570, 11580

Ref: AZ-04134



22-82139

SRE Housing

180 Amp, 138mm Stator OD

Used on: Crysler, Dodge, Jeep

Replaces:

OE: 421000-702, 421000-703

Lester: 11575, 11576

Ref: AZ-04132

Photo
Coming Soon

22-82151

SRE Housing

140 Amp, 128.5mm Stator OD

Used on: Crysler, Dodge

Replaces:

OE: 4896803AC

Lester: 11506



22-82134

SRE Housing

160 Amp, 128.5mm Stator OD

Used on: Crysler, Dodge

Replaces:

OE: 421000-005, -011, -015, -020, -037

Lester: 11040, 11244

Ref: AZ-0487



22-82146

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Chrysler, Dodge

Replaces:

OE: 421000-080

Lester: 11574

Ref: AZ-04141



22-82152

SRE Housing

160 Amp, 128.5mm Stator OD

Used on: Dodge

Replaces:

OE: 421000-0051, 421000-0111

Lester: 13914, 13915

Ref: AZ-0477



22-82138

SRE Housing

130-160 Amp, 128.5mm Stator OD

Used on: Crysler, Dodge

Replaces:

OE: 421000-012, -018, -019

Lester: 11039, 11048, 13923

Ref: AZ-0480

Note: Can use 22-82152 Mtg Foot
30mm Thickness



22-82149

SRE Housing

180-220 Amp, 138mm Stator OD

Used on: Dodge, Jeep

Replaces:

OE: 421000-704, 421000-705

Lester: 11592, 11598



22-82155

SRE Housing

160 Amp, 128.5mm Stator OD

Used on: Jeep

Replaces: 021041-6780, 021041-6950

OE: 421000-081

Lester: 11584

Ref:

Note: 11584 is a CCW unit

22-Slip Ring End Housing

CHRYSLER / DODGE / RAM / JEEP

**22-82164****SRE Housing****160 Amp, 128.5mm Stator OD****Used on:** Chrysler, Jeep**OE:** 421000-0820, 421000-0821**Lester:** 12886**Ref:** AZ-04147**22-82180****SRE Housing****120 Amp, 128.5mm Stator OD****Used on:** Chryslr, Sebring**OE:** 121000-2520, 421000-0740
421000-0060, 061, 062, 230, 232,
5-121000-252**Lester:** 13868**Ref:** AZ-0472**22-82192****SRE Housing****220-240 Amp, 138mm Stator OD****Used on:** Jeep, Wrangler**OE:** 421000-7221, 421000-7231**Lester:** 21024, 21025**Note:** CCW unit use, 128.5mm use 22-82155**Photo
Coming Soon****22-82166****SRE Housing****140 Amp, 128.5mm Stator OD****Used on:** Buick, Pontiac**OE:** 104210-3300, 104210-3310,
104210-4360, 104210-4540**Lester:** 11035, 11036, 11180**Ref:****22-82182****SRE Housing****120 Amp, 128.5mm Stator OD****Used on:** Chryslr, Sebring**OE:** 104210-1750**Lester:** 11792, 11793**Ref:** AN-04145**22-82196****SRE Housing****220-240 Amp, 138mm Stator OD****Used on:** Chrysler, Voyager, Ram,
Promaster**OE:** 421000-718, 421000-719**Lester:** 11940, 44013**Ref:** AZ-04158**Photo
Coming Soon****22-82183****SRE Housing****180/220 Amp, 138mm Stator OD****Used on:** Ram, Promaster**OE:** 421000-7110, 421000-7120**Lester:** 11792, 11793**Ref:** AN-04190

FORD / LINCOLN

alignment pin



22-82096

SRE Housing

195 Amp, 138mm Stator OD

Used on: Ford Truck

OE: 104210-618

Lester: 11434, 11534, 11982, 44006

Ref: AE-0464

Note: This SRE is w/ alignment pin.
Wo/ alignment pin, please use
22-82103.



22-82117

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Ford, Lincoln, Mercury

Replaces:

OE: 104210-111, -470, -563, -586

Lester: 11292, 11430, 11431, 11432

Ref: AE-0432

Note: wo/ mounting ear



22-82156

SRE Housing

160 Amp, 128.5mm Stator OD

Used on: Ford Mustang

Replaces:

OE: 104210-297

Lester: 11623, 11625, 11626, 11759

Ref: AN-0481



22-82109

SRE Housing

125 Amp, 128.5mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-543

Lester: 11291

Ref: AE-0430



22-82141

SRE Housing

220 Amp, 138mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-627

Lester: 11532, 11679, 11867, 44000,
44001

Ref: AE-0454



22-82159

SRE Housing

130 Amp, 128.5mm Stator OD

Used on: Ford Freestyle

Replaces:

OE: 104210-4090, 104210-4091,
104210-5300

Lester: 11238

Ref: AE-0428



22-82115

SRE Housing

200 Amp, 138mm Stator OD

Used on: Ford Truck

Replaces:

OE: 104210-610

Lester: 11290, 11549, 11620, 11641,
12893

Ref: AE-0431



22-82143

SRE Housing

180-225 Amp, 138mm Stator OD

Used on: Ford Truck

OE: 104210-622, -634, -660, -667

Lester: 11624, 11627, 11629, 11630,
11763, 11918, 11963, 20838,
41004, 41005, 44005, 44007,
44014, 8913

Ref: AE-0465



22-82160

SRE Housing

175 Amp, 138mm Stator OD

Used on: Ford Truck, Lincoln Truck

OE: 104210-6561, 104211-0310

Lester: 11664, 11665, 20268, 21029,
21030

Ref: AE-0477

22-Slip Ring End Housing

FORD / LINCOLN

**22-82163**

SRE Housing

140 Amp, 128.5mm Stator OD

Used on: Lincoln LS

Replaces:

OE: 104210-3210, 104210-3213,
104210-4160

Lester: 11000

Ref: AZ-0423

**22-82179**

SRE Housing

170 Amp, 138mm Stator OD

Used on: Ford Fusion

Replaces:

OE: 104210-6690

Lester: 11667, 12884

Ref: AE-0387

Note: 128.5mm use 21-82176

Photo
Coming Soon**22-82200**

SRE Housing

200 Amp, 138mm Stator OD

Used on: Ford Mustang

Replaces:

OE: 104210-6910, 104211-1151,
104211-0760, 104211-0761

Lester: 11887, 11943

Photo
Coming Soon**22-82181**

SRE Housing

157 Amp, 125.8mm Stator OD

Used on: Ford F-450, F-550, F-250,
F-350

OE: 104210-2920, 104210-2930

Lester: 11622, 11628

Ref: AE-0471

**22-82202**

SRE Housing

240 Amp, 138mm Stator OD

Used on: Ford Mustang

Replaces:

OE: 104211-0500, 104211-0501

Lester: 11878

Note:

**22-82176**

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Ford Escape

OE: 104210-2330, 104210-2910,
104210-2911

Lester: 11636, 11666

Ref: AE-0476

Note: 138mm use 22-82179

Photo
Coming Soon**22-82184**

SRE Housing

200 Amp, 138mm Stator OD

Used on: Ford Explorer

Replaces:

OE: 104210-6411

Lester: 11616

Ref: AE-0479

22-Slip Ring End Housing

GM (American)

BUICK / CADILLAC / CHEVY / GM / GMC / SATURN / PONTIAC



22-82103

SRE Housing

170 Amp, 138mm Stator OD

Used on: Chevy, GMC Truck

Replaces:

OE: 104210-686, -687

Lester: 11982, 14009, 14019, 14020, 44004, 44006

Ref: AJ-04197

Note: Similar to 22-82096, but 22-82103 SRE wo/ Alignment Pin



22-82118

SRE Housing

170 Amp, 138mm Stator OD

Used on: GM, Chevy, Buick

Replaces:

OE: 104210-616

Lester: 11251, 11252, 11645

Ref: AJ-04160



22-82130

SRE Housing

136 Amp, 128.5mm Stator OD

Used on: Buick, Chevy, Pontiac

Replaces:

OE: 104210-422

Lester: 11179

Ref: AJ-04145



22-82107

SRE Housing

220 Amp, 138mm Stator OD

Used on: GM Cadillac

Replaces:

OE: 104210-600

Lester: 11181

Ref: AT-04301



22-82125

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Cadillac STS, SRX

Replaces:

OE: 104210-326

Lester: 11038, 11248

Ref: AJ-04127

Note: wo/ mounting ear



22-82135

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Chevy, Potiac

Replaces:

OE: 104210-330, -331, -436, -454, 104210-499, -507,

Lester: 11035, 11036, 11146, 11156, 11180, 11183

Ref: AJ-04120



22-82116

SRE Housing

130 Amp, 128.5mm Stator OD

Used on: Cadillac CTS

Replaces: 021500-7111

OE: 104210-328

Lester: 11003

Ref: AJ-04129



22-82128

SRE Housing

130-140 Amp, 128.5mm Stator OD

Used on: Chevy, Pontiac, Saturn

Replaces:

OE: 104210-414, -433, -441, -442

Lester: 11109, 11110, 11140

Ref: AJ-04135



22-82136

SRE Housing

140-150 Amp, 128.5mm Stator OD

Used on: Buick, Cadillac, Pontiac

Replaces:

OE: 104210-306, 104210-333, 104210-437

Lester: 11178, 13919

Ref: AJ-04100

22-Slip Ring End Housing

BUICK / CADILLAC / CHEVY / GM / GMC / SATURN / PONTIAC

**22-82137****SRE Housing****150 Amp, 128.5mm Stator OD****Used on:** Cadillac**Replaces:****OE:** 104210-334, 104210-438**Lester:** 11037**Ref:** AJ-04122**22-82147****SRE Housing****140-150 Amp, 128.5mm Stator OD****Used on:** Chevy, Cadillac**Replaces:****OE:** 104210-200, -319, 332, 539, 813**Lester:** 11044, 11046, 11369, 11508, 11787, 14021**Ref:** AJ-04142**22-82188****SRE Housing****150 Amp, 128.5mm Stator OD****Used on:** Chevrolet**Replaces:****OE:** 104211-8900, 104211-8901, 104211-8902, 104211-8903**Lester:** 44015**22-82142****SRE Housing****140 Amp, 128.5mm Stator OD****Used on:** Buick**Replaces:****OE:** 104210-225**Lester:** 11367**Ref:** AJ-04166**22-82148****SRE Housing****150 Amp, 128.5mm Stator OD****Used on:** Chevy, GMC Truck**Replaces:****OE:** 104210-834, 104210-911**Lester:** 11785, 11981, 14007**Ref:** AJ-04179**Note:** wo/ mounting Ear**22-82205****SRE Housing****138mm Stator OD****Used on:** Cadillac**Replaces:****OE:** 104211-0670, 104211-0671, 104211-0672**Lester:** 11780**Ref:****22-82144****SRE Housing****150 Amp, 128.5mm Stator OD****Used on:** GM**Replaces:****OE:** 104210-541**Lester:** 11250**Ref:** AJ-04156**22-82169****SRE Housing****150 Amp, 128.5mm Stator OD****Used on:** Buick, Cadillac, Chevrolet, GMC**OE:** 104210-1960, 104210-1962**Lester:** 11681, 11682, 11795, 11964, 14883**Ref:** AJ-04178**Photo
Coming Soon****22-82206****SRE Housing****138mm Stator OD****Used on:** Cadillac, Chevrolet, GMC**OE:** 104211-0261, 13507127**Lester:** 44019**Ref:****Note:**

HONDA / ACURA



22-82087

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Acura, Honda

Replaces: 121501-2070

OE: 104210-329, 104210-473

Lester: 11503, 11604, 13980

Ref: AH-04113



22-82113

SRE Housing

130 Amp, 128.5mm Stator OD

Used on: Honda Accord

OE: 104210-124, 160, 189, 310, 350

104210-350, 377, 429, 430, -431

104210-448, 469, 591, 592

Lester: 11030, 11062, 11099, 11150, 11151

11391, 11392, 11573, 11600, 11672

Ref: AH-04123



22-82191

SRE Housing

130 Amp, 120mm Stator OD

Used on: Honda

Replaces:

OE: 104210-1540

Lester: 21740



22-82093

SRE Housing

130 Amp, 128.5mm Stator OD

Used on: Acura, Honda

Replaces:

OE: 104210-309

Lester: 13918

Ref: AH-04107



22-82168

SRE Housing

135 Amp, 120mm Stator OD

Used on: Acura, Honda

Replaces:

OE: 104211-3470

Lester: 21154

Ref: AH-04151

Note: without SRE Stud.

Photo
Coming Soon

22-82203

SRE Housing

110 Amp, 120mm Stator OD


Used on: Acura, Honda

Replaces:

OE: 104211-4310

Lester: 11965, 21388

Ref: AH-04163



22-82112

SRE Housing

130 Amp, 128.5mm Stator OD

Used on: Honda Accord

Replaces:

OE: 104210-589

Lester: 11390

Ref: AH-04132



22-82170

SRE Housing

135 Amp, 120mm Stator OD

Used on: Honda

Replaces:

OE: 104211-3960, 104211-3910

Lester: 11930, 11931

Ref: AH-04156

22-Slip Ring End Housing

TOYOTA / LEXUS



22-82085
SRE Housing

130-150 Amp, 128.5mm Stator OD

Used on: Lexus, Toyota

Replaces:

OE: 104210-338, -339, -344, -451, -512

Lester: 13983, 13992, 13994, 11090, 11153, 11198

Ref: AT-04274



22-82089
SRE Housing

Amp, 128.5mm Stator OD

Used on: Lexus, Toyota

Replaces:

OE: 104210-345, -362, -365, -375, -379, 104210-418, -419

Lester: 13981, 11032, 11033

Ref: AT-04275



22-82110
SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Lexus

Replaces:

OE: 104210-205, 104210-468

Lester: 11196

Ref: AT-04306



22-82086
SRE Housing

100-130 Amp, 128.5mm Stator OD

Used on: Honda, Toyota

Replaces:

OE: 104210-347, 104210-420, 104210-423, 104210-492

Lester: 13984, 11138, 11139, 11324

Ref: AT-04280



22-82094
SRE Housing

130 Amp, 128.5mm Stator OD

Used on:

Replaces:

OE: 104210-304

Lester: 13905, 13927

Ref: AT-04266



22-82114
SRE Housing

100 Amp, 128.5mm Stator OD

Used on: Toyota

Replaces:

OE: 104210-146, -548, -549

Lester: 11385, 11386, 11577

Ref: AT-04325



22-82088
SRE Housing

100 Amp, 128.5mm Stator OD

Used on: Toyota, Pontiac, Scion

OE: 104210-378, 388, 389, 403, 479, 104210-481, 488, 533

Lester: 11034, 11084, 11088, 11195, 11201

Ref: AT-04299



22-82101
SRE Housing

100-150 Amp, 128.5mm Stator OD

Used on: Lexus, Toyota

OE: 104210-209, 214, 447, 457, 474, 104210-475, 104210-551

Lester: 11136, 11137, 11322, 11323, 11325, 11326

Ref: AT-04308



22-82119
SRE Housing

180 Amp, 138mm Stator OD

Used on: Lexus, Toyota

Replaces:

OE: 104210-614

Lester: 11405, 21353

Ref: AT-04343

Note: 128.5mm use 22-82126

TOYOTA / LEXUS



22-82121

SRE Housing

80 Amp, 110.7mm Stator OD

Used on: Toyota, Tacoma

Replaces:

OE: 104210-811, 104210-823

Lester: 11194, 11354

Ref:

Note: This unit is aluminum SRE Cover but with Hair Pin Stator.



22-82133

SRE Housing

100 Amp, 128.5mm Stator OD

Used on: Toyota

Replaces:

OE: 104210-284

Lester: 11514, 11517, 11764

Ref: AT-04346

Note:

Photo
Coming Soon

22-82158

SRE Housing

130 Amp, mm Stator OD

Used on: Toyota

Replaces:

OE: 104210-4000

Lester: 11197

Ref:

Note:



22-82126

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Toyota

Replaces:

OE: 104210-508, -509, -510, -864

Lester: 11350, 11351, 11352, 11765

Ref: AT-04333

Note: 138mm use 22-82119



22-82145

SRE Housing

130 Amp, 128.5mm Stator OD

Used on: Lexus, Toyota

Replaces:

OE: 104210-346

Lester: 11087

Ref: AT-04298



22-82165

SRE Housing

80 Amp, 110.7mm Stator OD

Used on: Toyota Yaris

Replaces:

OE: 104210-8180

Lester: 11203, 11505

Ref: AT-04322



22-82131

SRE Housing

100 Amp, 128.5mm Stator OD

Used on: Toyota

OE: 104210-227, -234, -843

Lester: 11402, 11404, 11407, 11516, 11519, 11595

Ref: AT-04336



22-82157

SRE Housing

125 Amp, 120mm Stator OD

Used on: Toyota

Replaces:

OE: 104211-3301

Lester: 11776, 11777

Ref: AT-04361

Note:

Photo
Coming Soon

22-82172

SRE Housing

130 Amp, 120mm Stator OD

Used on: Toyota Tacoma

Replaces:

OE: 104211-3761

Lester: 21247

Ref: AT-04389

22-Slip Ring End Housing

TOYOTA / LEXUS

**22-82173****SRE Housing****180 Amp, 138mm Stator OD****Used on:** Toyota Land Cruiser**Replaces:****OE:** 104210-6150, DAN1209**Lester:** 21858**Ref:****Note:****22-82195****SRE Housing****125 Amp, 120mm Stator OD****Used on:** Toyota RAV4**Replaces:****OE:** 104211-3290, 291, 293, 161, 541**Lester:** 11778, 14486, 14487**Ref:** AT-04366**Note:** 138mm use 22-82192**22-82178****SRE Housing****180 Amp, 138mm Stator OD****Used on:** Lexus**Replaces:****OE:** 104210-6130, 104210-6131,
104210-6170, 104210-6173,
104210-6781, DAN1210**Lester:** 11328, 11406, 11761**Ref:** AT-04341**22-82199****SRE Housing****100 Amp, 120mm Stator OD****Used on:** Toyota Camry, Corolla, RAV4**Replaces:****OE:** 104211-4160, 104211-4170,
104211-4420**Lester:** 11941, 11977**Ref:** AT-04391**22-82194****SRE Housing****180 Amp, 138mm Stator OD****Used on:** Toyota Highlander**Replaces:****OE:** 104211-0971**Lester:** 21248**Ref:** AT-04384**Photo
Coming Soon****22-82186****SRE Housing****130 Amp, 120mm Stator OD****Used on:** Subaru Impreza**Replaces:****OE:** 104211-4510**Lester:** 21120, 41002**Ref:** AS-0462

22-Slip Ring End Housing

OTHER

HYUNDAI / LAND ROVER / JAGUAR / JOHN DEERE



22-82111

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Hyundai, Kia

Replaces:

OE: 104210-180, -287, -362, -564, -581

Lester: 11387, 11524, 11591, 11686

Ref: AN-04148



22-82105

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Land Rover

OE: 104210-369

Lester: 11206

Ref: AT-04321

Note: similar to 22-82108, except 22-82105 without screw hole for brush holder



22-82193

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Land Rover

Replaces:

OE: 104210-2420, 2421, 2422, 3691, DAN991, DAN1105

Lester: 11569, 20491

Ref: AT-04321



22-82175

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Hyundai, Kia

Replaces:

OE: 104211-8790

Lester: 11953, 11980

Ref: AN-04177



22-82198

SRE Housing

150 Amp, 128.5mm Stator OD

Used on: Landrover

OE: 021080-0080, 021080-2330, 331, 104210-1470, 104210-5360, 361, DAN1103

Lester: 11509, 11529, 11530, 11588, 11985

Ref: AN-04131



22-82197

SRE Housing

180 Amp, 138mm Stator OD

Used on: Hyundai, Kia

Replaces:

OE: 104210-6191

Lester: 11353, 11523

Ref: AN-04121



22-82190

SRE Housing

180 Amp, 138mm Stator OD

Used on: Landrover

Replaces:

OE: 104210-6420

Lester: 11762, 14016, 21032

Ref: AN-04186

Photo
Coming Soon

22-82090

SRE Housing

140 Amp, 128.5mm Stator OD

Used on: Jaguar

Replaces:

OE: 104210-308, -504

Lester: 13979

Ref: AN-04100

22-Slip Ring End Housing

HYUNDAI / LAND ROVER / JAGUAR / JOHN DEERE

**22-82098****SRE Housing****150 Amp, 128.5mm Stator OD****Used on:** John Deere**Replaces:****OE:** 104210-3920 (Early Type)**Lester:** 12660**Note:** Late Type, Please use 22-82104**22-82104****SRE Housing****150 Amp, 128.5mm Stator OD****Used on:** John Deere**Replaces:****OE:** 104210-3921 (Late Type)**Lester:** 12660**Note:** Late Type, for Early Type please use 22-82098**22-82204****SRE Housing****200 Amp, 138mm Stator OD****Used on:****Replaces:****OE:** 104210-699**Lester:** 20276**Note:**

DE

SRE

CLUTCH
PULLEY
Cap & Tool
for Clutch
PulleySolid
PULLEY

Stator

Slip Ring

Rotor

Rectifier
and
Parts

Diode

Regulator
, Terminal
BlockBrush
Holder
and Parts

Insulator

SRE
COVERMisc. Parts
B+ Term.
Post & Nut

Hardware

24-Clutch/Decoupler Pulley



24CP-82001
Clutch Pulley
8-Groove

Used on: Dodge Ram Pickups

Replaces:

Size: 60mm OD x 28mm Belt
17mm Bore, M14 x 1.5 Threaded
9.5mm to First Groove

OE: 421000-051, 421000-700

Lester: 11378, 11379, 11583

Ref: 24-82117

Note: OE Take Out

Photo
Coming Soon

24CP-82002
Clutch Pulley
6-Groove

Used on:

Replaces:

Size: 49mm OD x 20mm Belt
17mm Bore, M14 x 1.5 Threaded

OE: 104210-376

Lester: 23839

Ref: 24-82300



24CP-82003
Clutch Pulley
6-Groove

Used on: Chrysler, Dodge, Jeep

Replaces: 021010-1440, 021040-1440

Size: 58mm OD x 20mm Belt
17mm Bore, M14 x 1.5 Threaded
9.1mm to First Groove

OE: 421000-001, -002, -014, -022, -030
421000-049, -075

Lester: 13870, 13871, 11063, 11114

Ref: 24-82273, 28581



24CP-82004
Clutch Pulley
7-Groove

Used on: Toyota

Replaces:

Size: 55mm OD x 25mm Belt
17mm Bore, M14 x 1.5 Threaded
9.0mm to First Groove

OE: 104210-479, -481, -488

Lester: 11195, 11201

Ref: 24-82291



24CP-82005
Clutch Pulley
7-Groove

Used on: Lexus, Toyota

Replaces:

Size: 53mm OD
17mm Bore, M14 x 1.5 Threaded
9.0mm to First Groove

OE: 104210-109, -205, -207, -209, -210
104210-214, -284, -286, -447, -457
104210-468, -474, -475, -483, -489
104210-551;

104211-803, -809, -860
Lester: 11136, 11137, 11196, 11322,
11323, 11325, 11326, 11510,
11514, 11517, 14072

Ref: 24-82290, 28738



24DP-82005
Decoupler Pulley
7-Groove

Used on: Lexus, Toyota

Replaces:

Size: 53mm OD
17mm Bore, M14 x 1.5 Threaded
9.0mm to First Groove

OE: 104210-109, -205, -207, -209, -210
104210-214, -284, -286, -447, -457
104210-468, -474, -475, -483, -489
104210-551;

104211-803, -809, -860
Lester: 11136, 11137, 11196, 11322,
11323, 11325, 11326, 11510,
11514, 11517, 14072

Ref: 24-82290, 28738



24CP-82006
Clutch Pulley
6-Groove

Used on: Buick, Chevrolet, GMC, Saturn
Hyundai

Replaces: 021040-1840, 021040-1841

Size: 59.2mm OD
17mm Bore, M14 x 1.5 Threaded
9.0mm to First Groove

OE: 104120-225, -616, -631, -813

Lester: 11202, 11252, 11367, 11491,
11492

Ref: 24-82302, W055-122N

24-Clutch/Decoupler Pulley

DE SRE CLUTCH PULLEY	 24CP-82007 Clutch Pulley 6-Groove Used on: Dodge, Jeep Replaces: 021040-2090 Size: 51.9mm OD 17mm Bore, M14 x 1.5 Threaded 9.0mm to First Groove OE: 421000-075, 421000-077 Lester: 11570, 11572 Ref: 24-82322, W055-127N, 28810	 24CP-82009 Clutch Pulley 4-Groove Used on: Toyota Replaces: Size: 56.2mm OD 17mm Bore, M14 x 1.5 Threaded 9.0mm to First Groove OE: 104210-263, 104210-265 Lester: 11516, 11519 Ref: AT-09338, 24-822101, W055-128N	Photo Coming Soon 24DP-82010 Clutch Pulley 6-Groove Used on: Acura, Honda Replaces: 31141-RV0-A01 Size: 65.3mm OD 17mm Bore, M14 x 1.5 Threaded 9.4mm to First Groove OE: 104210-124, -160, -189, -199 104211-830, -851, -852 Lester: 11573, 11600, 11670, 11672, 11773, 11774, 11775 Ref: 24-82324, W055-131N, AH-09134
Cap & Tool for Clutch Pulley Solid Pulley Stator Slip Ring Rotor Rectifier and Parts Diode Regulator ' Terminal Block Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	 24CP-82008 Clutch Pulley 6-Groove Used on: Pontiac, Scion, Toyota Replaces: 021010-1440, 021040-1320, 021040-1130, 021040-1170, 021070-1811 Size: 55mm OD 17mm Bore, M14 x 1.5 Threaded 9.0mm to First Groove OE: 104210-225, -616, -631, Lester: 11402, 11577, 14486, 14487, 20359 Ref: AT-09336, 24-82289, W055-85N	 24CP-82010 Clutch Pulley 6-Groove Used on: Acura, Honda Replaces: 31141-RV0-A01 Size: 65.3mm OD 17mm Bore, M14 x 1.5 Threaded 9.4mm to First Groove OE: 104210-124, -160, -189, -199 104211-830, -851, -852 Lester: 11573, 11600, 11670, 11672, 11773, 11774, 11775 Ref: 24-82324, W055-131N, AH-09134	 24CP-82011 Clutch Pulley 5-Groove Used on: Volvo Replaces: 021040-1210 Size: 55.5mm OD 17mm Bore, M14 x 1.5 Threaded 11.1mm to First Groove OE: 104210-355, -356, -405, -464 Lester: 11054, 11093 Ref: 24-82312, W055-131N

24-Clutch/Decoupler Pulley



24CP-82012
Clutch Pulley
5-Groove

Used on: Volvo
Replaces: 021040-2340, 021040-2680
Size: 54mm OD
 17mm Bore, M14 x 1.5 Threaded
OE: 104210-190, -196
 104211-817, -834, -911
Lester: 11681, 11682, 11780, 11785,
 11795, 14007, 14883
Ref: 24-82330



24CP-82014
Clutch Pulley
6-Groove

Used on: Chrysler, Dodge, Jeep, Ram
Replaces: 05184692AB, 920972
Size: 52mm Rib OD
 17mm Bore, M14 x 1.5 Threaded
OE: 421000-7040, -041,
 421000-705, -050, -051, -070,
 421000-7090, MX421000-7041
Lester: 11592, 11598, 11680, 12887
Ref: 24-82325-4



24CP-82016
Clutch Pulley
6-Groove

Used on: Toyota
Replaces: 27415-0W110, 27415-0W110B
Size: 54mm OD
 17mm Bore, M14 x 1.5 Threaded
OE: 104210-2350, -351, -352, -360,
 104210-2362, -550, -570, -610
Lester: 11400, 11403, 11404, 11407,
 11408
Ref: 24-82323-4

**Photo
Coming Soon**

24CP-82013
Clutch Pulley
6-Groove

Used on: Volvo
Replaces: 021040-2340, 021040-2680
Size: 55.9mm OD
 17mm Bore, M14 x 1.5 Threaded
OE: 421000-702, -703
Lester: 11575, 11576
Ref: AZ-09132



24CP-82015
Clutch Pulley
6-Groove

Used on: Toyota
Replaces: 27415-33070
Size: 58mm OD
 17mm Bore, M14 x 1.5 Threaded
OE: 104210-2320, 104210-2520,
 DAN1018
Lester: 20538
Ref: 24-82333



24CP-82017
Clutch Pulley
7-Groove

Used on: Isuzu
Replaces:
Size: 56mm OD
 17mm Bore, M14 x 1.5 Threaded
OE: 104210-9030, -031, -032, -033,
 104210-9840
Lester: 20212
Ref:

24-Clutch/Decoupler Pulley

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY Stator Slip Ring Rotor Rectifier and Parts Diode Regulator ' Terminal Block Brush Holder and Parts Insulator COVER SRE Misc. Parts B+ Term. Post & Nut Hardware	 24CP-82019 Clutch Pulley 6-Groove Used on: Alfa Romeo, Fiat Replaces: 77365271 Size: 56mm OD 17mm Bore, M17 x 1.5 Threaded OE: 101210-1320, 101210-1321 Lester: 20357 Ref: 24-82318	 24CP-82021 Clutch Pulley 6-Groove Used on: Toyota Replaces: 27415-0T020, 27415-0T021, 27415-0T022 Size: 55mm OD 17mm Bore, M17 x 1.5 Threaded OE: 104210-5290, -350, -351, -580, DAN1019, DAN967 Lester: 20395 Ref: 24-82317	 24CP-82023 Clutch Pulley 4-Groove Used on: Alfa Romeo, Fiat Replaces: 021040-2300 518 607 57, 552 165 55 Size: 59.2mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-0300, -561, -571, -310, 104210-6900, -910, -023, -760, 104211-07610 Lester: 11664, 11665, 11943, 20268, 44009, 21030 Ref: 24-82326-4
	 24CP-82020 Clutch Pulley 6-Groove Used on: Alfa Romeo, Fiat Replaces: 021040-1980 518 607 57, 552 165 55 Size: 54mm OD 17mm Bore, M17 x 1.5 Threaded OE: 101210-1090, -091, 101210-1430, -440, -900 Lester: 20361, 20675, 21048 Ref:	 24CP-82022 Clutch Pulley 7-Groove Used on: Acura, Honda Replaces: 31141-5X6-J01 Size: 57.5mm OD 17mm Bore, M17 x 1.5 Threaded OE: 104211-3470, 104211-3910 Lester: 11931, 21154 Ref:	 24CP-82024 Clutch Pulley 6-Groove Used on: Ford Replaces: CJ5G-10A352-DA, CJ5Z-10344-B Size: 52mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-6540, 104210-6541, 104210-6690 Lester: 11666, 11667, 12884 Ref: 24-82328-4

Hardware	B+ Term. Post & Nut	Misc. Pars	SRE COVER	Insulator	Brush Holder and Parts	Regulator , Terminal Block	Diode	Rectifier and Parts	Rotor	Slip Ring	Stator	Solid PULLEY	Cap & Tool for Clutch Pulley	CLUTCH PULLEY	SRE DE
----------	------------------------	------------	--------------	-----------	------------------------------	----------------------------------	-------	------------------------	-------	-----------	--------	-----------------	------------------------------------	------------------	-----------



24CP-82029
Clutch Pulley
6-Groove

Used on: Ford
Replaces: 021040-2290
Size: 52mm OD
 17mm Bore, M14 x 1.5 Threaded
OE: 104210-2330, 104210-2910,
Lester: 11636, 11666
Ref: 24-82327-4



24CP-82030
Clutch Pulley
7-Groove

Used on: Hyundai
Replaces:
Size: 60mm OD
 17mm Bore, M14 x 1.5 Threaded
OE: 02131-9340, 021319340
Lester: 24153
Ref:

24-Clutch/Decoupler Pulley

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY Stator Slip Ring Rotor Rectifier and Diode Regulator 'Terminal Block Brush Holder and Parts Insulator COVER SRE Misc. Parts B+ Term. Post & Nut Hardware	 24CP-82031 Clutch Pulley 6-Groove Used on: Cadillac, Chevrolet, GMC Replaces: 021040-2410 Size: 59mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104211-8340, 104211-8360, 104211-9110, 104211-9112 Lester: 11785, 11794, 14007 Ref: 24-82329-4	 24CP-82033 Clutch Pulley 6-Groove Used on: Ford Replaces: Size: 59.5mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-6411 Lester: 11616 Ref:	Photo Coming Soon 24CP-82042 Clutch Pulley 6-Groove Used on: Replaces: Size: 56mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-2940, 104210-2941, 104210-2942 Lester: 11625 Ref:
	 24CP-82032 Clutch Pulley 7-Groove Used on: Toyota Replaces: 27415-0W051, 0W052 Size: 53.7mm OD 15mm Bore, M14 x 1.5 Threaded OE: 104210-8230, 104210-8232, 104210-8590, 104210-8591 Lester: 11354 Ref: 24-82321-4	 24CP-82040 Clutch Pulley 8-Groove Used on: BMW Replaces: 021040-1900 Size: 49mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-6240, 104210-6250, 104210-6251, 104210-6254, 104210-6510, 104210-6511, 104210-6512, 104210-6513, 104210-6514, 104210-6580, 121000-3490, DAN1137 Lester: 11751, 11752, 11791, 11951 Ref: 24-82113	Photo Coming Soon 24CP-82045 Clutch Pulley 5-Groove Used on: Replaces: 021040-2410 Size: 59mm OD 17mm Bore, M14 x 1.5 Threaded OE: 421000-7120, MX421000-7120 Lester: 11792 Ref: 24-82329-4

24-Clutch/Decoupler Pulley



24CP-82043
Clutch Pulley
5-Groove

Used on: Dodge, Fiat
Replaces:
Size: 49mm OD
17mm Bore, M14 x 1.5 Threaded
OE: 104211-8000, 104211-8370
Lester: 11594, 11771
Ref:



24CP-82046
Clutch Pulley
6-Groove

Used on: Ford
Replaces: 27415-0W051, 0W052
Size: 54.7mm OD
17mm Bore, M14 x 1.5 Threaded
OE: 104210-6181, 104210-6182
Lester: 11434
Ref:



24CP-82047
Clutch Pulley
6-Groove

Used on: Cadillac, Hyundai, Kia, Toyota
Replaces: 27415-33050
Size: 59.5mm OD
17mm Bore, M14 x 1.5 Threaded
OE: 104210-200, 104210-2000,
104210-2001, 104210-4101,
104210-4102, 104210-5150,
104210-5151
Lester: 11202, 11492, 11508, 23843
Ref: 24-82118



24CP-82048
Clutch Pulley
6-Groove

Used on: Jagara, Hyundai, Kia,
Land Rover
Replaces: 021040-2560
Size: 54mm OD
17mm Bore, M14 x 1.5 Threaded
OE: 104210-1060, 104210-5360,
104210-5361, 104210-6360,
104210-6361, 104210-6620,
DAN1103, DAN1203,
Lester: 11588, 11769, 20133, 20223
Ref: 24-82338



24CP-82049
Clutch Pulley
5-Groove

Used on:
Replaces: 021040-2290
Size: 54mm OD
17mm Bore, M14 x 1.5 Threaded
OE: 104210-1190, 104211-8480,
DAN1329
Lester: 11796, 20503
Ref:



24CP-82051
Clutch Pulley
6-Groove

Used on: Cadillac, Chevrolet, GMC
Replaces: 021040-2420
Size: 60mm OD
17mm Bore, M14 x 1.5 Threaded
OE: 021040-2420
Lester: 14009
Ref: 24-82331-4

24-Clutch/Decoupler Pulley

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY Stator Slip Ring Rotor Rectifier and Parts Diode Regulator 'Terminal Block Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware			
	 24CP-82052 6-Groove Used on: Cadillac, Chevrolet, GMC, Saab Replaces: 021040-1380 Size: 65mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-2170, 104210-6480, 104210-6481, 104210-6482, 104210-6483, 104210-6800, 104211-8160, 104211-8161 Lester: 11499 11507, 11647, 11783, 11784, 21032 Ref: 24-82332-4	 24CP-82054 Clutch Pulley 6-Groove Used on: Ford Replaces: Size: 66.5mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104211-0620, 104211-1130, 104211-1450, 104210-6950, 104210-6951 Lester: 11759, 11963, 41006, 44014 Ref:	 24CP-82056 Clutch Pulley 7-Groove Used on: Honda Replaces: 31141-59B-J01 Size: 57.5mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104211-3710, 104211-4340 Lester: 21237, 21238 Ref:
	 24CP-82053 Clutch Pulley 6-Groove Used on: Ford Replaces: 021040-2570 Size: 57.3mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-6920, 104210-6921 Lester: 44005 Ref:	Photo Coming Soon 24CP-82055 Clutch Pulley 6-Groove Used on: Ford Replaces: 104210-6820 Size: 57.5mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104210-6820, 104210-6950, 104210-6951, 104211-1120, 104211-1130 Lester: 11963, 41006 Ref:	 24CP-82057 Clutch Pulley 7-Groove Used on: Acura Replaces: 31141-6B2-A01, 31141-6B2-A01-M4 Size: 55.08mm OD 17mm Bore, M14 x 1.5 Threaded OE: 104211-4310 Lester: 11965 Ref:

24-Cap & Tools for Clutch Pulley



24CP-CAP001
Cap-Clutch Pulley
Snap On Type

Used on: 24CP-82003, 24CP-82004,
24CP-82005, 24CP-83001,
24CP-83002, 24CP-91002,
24CP-91003, 24CP-94001



24CP-CAP002
Cap-Clutch Pulley

Used on: 24CP-81001, 24CP-81001-1,
24CP-82007, 24CP-91001



TL24-007
Tool-Clutch Pulley
Fine Spline

Used on:



TL24-008
Tool-Clutch Pulley
Hex Head

Used on:



TL24-021
Box-Clutch & Decoupler Pulley
Note: Shafts & Key Nuts cover all Europe & North American applications.

Hardware	B+ Term. Post & Nut	Misc. Pars	SRE COVER	Insulator	Brush Holder and Parts	Regulator Terminal Block	Diode	Rectifier and Parts	Rotor	Slip Ring	Stator	Solid PULLEY	Cap & Tool for Clutch Pulley	CLUTCH PULLEY	SRE	DE
----------	---------------------	------------	-----------	-----------	------------------------	--------------------------	-------	---------------------	-------	-----------	--------	--------------	------------------------------	---------------	-----	----

24-Pulley



24-125Y
Pulley
6-Groove

Used on: Chrysler, Dodge, Honda, Isuzu, Jeep, Lexus, Plymouth, Toyota

Replaces: 021040-6240, 021041-5530, 021041-7540, 021041-9200

Size: 17mm Bore
65mm OD x 21mm Belt
8.52mm to First Groove

OE: 101211-548, -549, -550, -551, -562
101211-585, -717, -767, -785, -906
101211-910, -911, -912, -913, -960
101211-976, -978, -989, -998, -999
102211-068, -069, -100, -101, -102
102211-115, -133, -162, -171, -308
104210-310, -330, -334, -345, -350
104210-362, -377, -379, -418, -419
104210-429, -430, -431, -438, -448
104210-469, -591, -592, -827
121000-340, -352, -407, -412, -416
121000-423, -427, -433, -437, -451
121000-458
421000-003, -006, -012, -023, -032
421000-043, -059, -459

Lester: 13307, 13311, 13331, 13538, 13539, 13558, 13593, 13594, 13695, 13706, 13722, 13746, 13747, 13755, 13763, 13765, 13769, 13806, 13835, 13836, 13842, 13844, 13868, 13923, 13964, 11030, 11033, 11037, 11062, 11099, 11150, 11151, 11276, 1391, 11392, 11671

Ref: 24-82260, W055-27N

Note: If used on 11030, 11151, need to use with 46-82098 Specacer



24-171Y
Pulley
6-Groove

Used on: Chrysler, Dodge, Honda, Isuzu, Jeep, Lexus, Plymouth, Toyota

Replaces: 021041-6780, 021041-6950

Size: 17mm Bore
58mm OD x 21mm Belt
8mm to First Groove

OE: 100211-647, -799, -825, -839, -845
100211-849, -884, -886
101211-014, -545, -556, -561, -571
101211-572, -730, -744, -745, -752
101211-775, -776, -780, -784, -786
101211-915, -916, -935, -941, -943
101211-971, 996
102211-052, -059, -061, -065, -073
102211-084, -137, -141, -190, -192
102211-199, -200, -234, -235, -261
102211-269, -503, -506, -514
104210-216, -245, -289, -297, -303
104210-304, -312, -319, -320, -328
104210-332, -338, -339, -344, -346
104210-348, -365, -366, -368, -375
104210-400, -409, -415, -443, -451
104210-491, -449, -507, -525, -530
104210-539, -541, -542, -550, -601
104210-634, -660, -667, -671, -801
104211-023, -028
121000-344, -345, -348, -351, -357
121000-358, -360, -365, -371, -373
121000-375, -381, -382, 446
421000-004, -010, -018, -025, -026
421000-033, -034, -036, -039, -044,
421000-047, -050, -052, -053, -055
421000-060, -066, -067, 071

Lester: 12778, 13341, 13442, 13443, 13444, 13545, 13546, 13552, 13578, 13669, 13706, 13715, 13747, 13748, 13756, 13791, 13809, 13822, 13834, 13844, 13856, 13859, 13867, 13869, 13880, 13912, 13913, 13919, 13927, 13956, 13978, 13981, 13983, 13994, 13999, 11003, 11032, 11033, 11044, 11046, 11048, 11087, 11090, 11112, 11116, 11146, 11152, 11153, 11155, 11156, 11191, 11193, 11197, 11198, 11238, 11240, 11241, 11250, 11251, 11286, 11297, 11369, 11431, 11449, 11476, 11479, 11629, 11630

Ref: 24-82263, W055-38N, W055-96N



24-184Y
Pulley
6-Groove

Used on: Chevrolet, Lexus, Toyota


Replaces: 021041-6780, 021041-6950

Size: 17mm Bore
55mm OD x 21mm Belt
8mm to First Groove

OE: 100211-839, -849, -866
101211-572, -744, -784
102211-086, -190, -192, -234, -261
104210-369, -370
121000-378, -380
421000-063

Lester: 13274, 13276, 13413, 13537, 13844, 13877, 13878, 13906, 13925, 13956, 11205, 11206, 11382, 11569

Ref: AT-09108, 24-82277

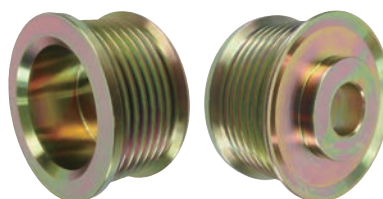

24-222Y
Pulley
7-Groove

Used on: Dodge, Jeep

Replaces: 021040-0800, 021041-8040
021041-9680

Size: 17mm Bore
57.5mm OD x 25mm Belt
8.5mm to First Groove

OE: 100211-637
121000-353, -363, -376, -417, -422
121000-429, -430, -435, -436, -445
121000-447, -449, -456
421000-021, -028, -041

Lester: 13566, 13581, 13742, 13823, 13824, 13861, 13910, 13911, 13924, 13988, 11117, 11298,

Ref: AZ-0945, 24-82269, W055-51

24-Pulley



**24-304
Pulley
8-Groove**

Used on: John Deere
Replaces: 021041-7320
Size: 17mm Bore
 62.5mm OD x 28mm Belt
 9.5mm to First Groove
OE: 100211-642,
 101211-503, -713, -778,
 102211-040, -118,
 104210-392, -393
Lester: 12193, 12194, 12195, 12474,
 12657, 12658, 12660

**Photo
Coming Soon**

**24-305
Pulley
6-Groove**

Used on: Honda, Lexus, Toyota
Replaces: 021041-6940, 021041-7120
 121041-0600
Size: 17mm Bore
 62mm OD x 25mm Belt
 8.5mm to First Groove
OE: 100211-616, -618, -630, -810, -874
 101211-702, -712, 765
 102211-103, 104
 104210-306, -307, -330, -331, -333
 104210-422, -436, -437, -454, -456
 104210-599, -600, -611
Lester: 13331, 13410, 13506, 13547,
 13919, 11035, 11036, 11178,
 11179, 11180, 11181, 11183
Ref: 24-82278



**24-315B
Pulley
7-Groove**

Used on: Toyota
Replaces: 121041-0220, 021041-9630
Size: 17mm Bore
 59.5mm OD x 26mm Belt
 9.3mm to First Groove
OE: 101211-740
 102211-077, -267, -268, -287
 104210-314, 329, -378, -388, -389
 104210-403, -533, -589
Lester: 13959, 13962, 13965, 13988,
 13980, 11034, 11084, 11088,
 11390
Ref: AT-09261, 24-82286



**24-319
Pulley
7-Groove**

Used on: Chrysler
Replaces: 021041-9691
Size: 17mm Bore
 57.7mm OD x 24mm Belt
 9.2mm to First Groove
OE: 421000-005, -021, -028, -041, -058
Lester: 13915, 13988, 11298
Ref: 24-82306



**24-323
Pulley
8-Groove**

Used on: Ford
Replaces:
Size: 17mm Bore
 70mm OD x 32mm Belt
 9.3mm to First Groove
OE: 104210-610
Lester: 11290
Ref: AE-0931



**24-325
Pulley
8-Groove**

Used on:
Replaces:
Size: 17mm Bore
 45mm OD x 25mm Belt
 8mm to First Groove
OE:
Lester: 11034*
Note: Similar to 24-315, except...
 *This is small OD special made to
 replace to 11034.

24-Pulley

DE SRE CLUTCH Cap & Tool PULLEY Solid PULLEY Stator Slip Ring Rotor Rectifier and Parts Diode Regulator Terminal Block Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware



**24-331Y
Pulley
6-Groove**

Used on: Chrysler, Dodge, Jeep

Replaces:

Size: 17mm Bore

52.4mm OD x 21mm Belt

9.1mm to First Groove

OE: 421000-026, 034, 036, 048, 055

421000-062, 066, 073

Lester: 11113, 11155, 11241, 11296,

11299, 11383

Note: OE spec.



**24-350
Pulley
10-Groove**

Used on:

Replaces:

Size: 17mm Bore

59mmOD x 34mm Belt

9.22mm to First Groove

HFG 9mm

OE:

Lester:

Note: .



**24-351
Pulley
8-Groove**

Used on:

Replaces:

Size: 17mm ID

49mmOD x 28mm Belt

OE:

Lester: 11712 etc.

Note: for 45mm OD, please use 24-375



**24-352
Pulley
6-Groove**

Used on:

Replaces:

Size: 17mm Bore

45mm OD x 21mm Belt

8mm to First Groove

HFG 8mm

OE:

Lester:

Note:



**24-354
Pulley
1-Groove**

Used on:

Replaces:

Size: 17mm Bore

67mm OD x 10mm Belt

11.43mm to First Groove

OE:

Lester:

Note:



**24-371
Pulley
1-Groove**

Used on:

Replaces:

Size: 17mm Bore

54mm OD x 9mm Belt/W

13mm to First Groove

OE:

Lester:

Note:



**24-374Y
Pulley
4-Groove**

Used on:

Replaces:

Size: 17mm Bore

45mm OD x 14mm W

8.02mm to First Groove


HFG:7.25mm

OE:

Lester:

Note:

27-Stator

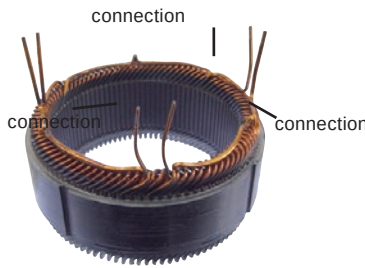

27-82018

Stator

100-130 Amp, 128.5mm OD

Used on:


Replaces:

Size: 100mm ID
128.5mm OD
32mm Thickness

Lester: 11033, 11034, 11088, 11136, 11138, 11195, 11201, 11324, 11350, 11402, 13868, 13871, 13980...etc

Ref: AZ-0288

Note: 6-Lead/3 connections.
Use w/30-82024 Rotor.
Delta Connect



27-82022

Stator

130-160 Amp, 128.5mm OD

Used on:


Replaces: 021100-4940

Size: 100mm ID
128.5mm OD
32mm Thickness

Lester: 12660, 12886, 13867, 13868, 13868, 13870, 13870, 13870, 13871, 13871, 13905, 13912, 13913, 13913, 13913, 13914, 13915, 13918, 13919, 13923, 13927, 13963, 13978, 13979, 13981, 13983, 13984, 13988, 13992, 13994, 11000, 11003, 11030, 11032, 11032...etc

Ref: AZ-0272

Note: 6-Lead/2 connections.
Use w/30-82017 Rotor.
Doulble Wye Connect

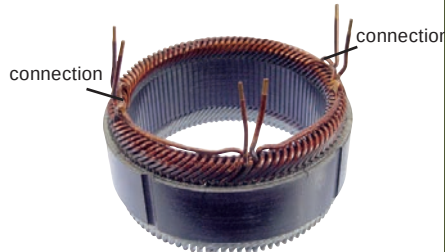

27-82020

Stator

170-200 Amp, 138mm OD

Used on:


Replaces:

Size: 109mm ID
138mm OD
34.7mm Thickness

Lester: 11252, 11290, 11434, 11598...etc

Ref: AE-0231

Note: 6-Lead/2 connections.
Use w/30-82023 Rotor.
Double Delta Connect



27-82024

Stator

220-225 Amp, 138mm OD

Used on: Dodge, Ford

Replaces: 021100-5480

Size: 109mm ID
138mm OD
34.7mm Thickness

OE: 104210-600, 611, 618, 627, 104210-6601, 421000-700, 421000-701, 421000-703, 421000-705

Lester: 11181, 11379, 11380, 11532, 11534, 11576, 11629...etc

Ref: 11181, 11379, 11380, 11532, 11534, 11576, 11629

Note: 6 Lead/6 connections.
Use w/30-82018 Rotor.
Delta Connect



27-82023

Stator

80 Amp, 110.7mm OD

Used on:

Replaces: 021100-5080


Size: 87mm ID
110.7mm OD
34.7mm Thickness

Lester: 11089, 11152, 11194, 11203, 11354

Ref:

Note: 3-Lead/1-connections.
Use w/30-82025 Rotor.

27-Stator



27-82026
Stator
130 Amp, 120mm OD

Used on:

Replaces:

Size: 94mm ID
120mm OD
32mm Thickness

OE:

Lester:

Ref:

Note: 6 Lead/2 connections.



27-82029-1
Stator
12V, 220Amp, 138mm OD

Used on:

Replaces:

Size: 109mm ID
138mm OD
38.7mm Thickness

OE:

Lester:

Ref:

Note:



27-82031-1
Stator
24V, 80 Amp, 128.5mm OD

Used on:

Replaces:

Size:

OE:

Lester:

Ref:

Note: Use w/30-82033 Rotor



27-82027
Stator
130 Amp, 120mm OD

Used on:

Replaces:

Size: 94mm ID
120mm OD
32mm Thickness

OE:

Lester:

Ref:

Note: 6 Lead/3 connections.



27-82030
Stator
24V, 150Amp, 130.5mm OD

Used on:

Replaces:

Size: 150.5mm OD
120mm ID
39.5mm T

OE:

Lester: 14793

Ref:

Note: 6 Leads / 2 Dot.
With Eye Terminal.
Used on Pad Mount type Alternator.

28-Slip Ring



28-82012-4
Slip Ring

Used on:
Replaces:
Size: 7.2mm ID, 15mm OD
75mm/75mm Lead Length
OE:
Lester:
Ref:
Note: Square Lead



28-82017-2
Slip Ring

Used on:
Replaces:
Size:
OE:
Lester: 11033, 11034, 11195, 13870,
13918, 13919, 13980.. etc
Ref: AT-08274, 28-82854, W165-11
Note: Staight Lead

Hardware	B+ Term. Post & Nut	Misc. Pars	SRE COVER	Insulator	Brush Holder and Parts	Regulator Terminal Block	Diode	Rectifier and Parts	Rotor	Slip Ring	Stator	Solid PULLEY	Cap & Tool for Clutch Pulley	CLUTCH PULLEY	SRE	DE
----------	---------------------	------------	-----------	-----------	------------------------	--------------------------	-------	---------------------	-------	-----------	--------	--------------	------------------------------	---------------	-----	----

30-Rotor



30-82024


Rotor

12V, 100-130 Amp

Size: 99.5mm OD x 147mm OAL

Lester: 11033, 11034, 11088, 11136, 11138, 11195, 11201, 11324, 11350, 11402, 13868, 13871, 13980...etc

Note: 2.5 ohm. (or 2.6 ohm)
Use w/27-82018 Stator.



30-82023

Rotor


12V, 180-200 Amp

Replaces:

Size: 109mm OD

Lester: 11252, 11290, 11434, 11598...etc

Note: 2.2 ohm.
Use w/27-82020 Stator.



30-82027

Rotor


24V, 80Amp

Used on: Hino Truck

Size: 99.5mm OD x 147mm L

Lester: 11109, 11584

Note: Use w/27-82022 Stator.
For 138mm CCW use 30-82034.
Pulley Nut 85-82001F-CCW.



30-82017

Rotor

12V, 130-160 Amp

Replaces: 021200-8580

Size: 99.5mm OD x 147mm OAL

Lester: 12660, 12886, 13867, 13868, 13868, 13870, 13870, 13870, 13871, 13871, 13905, 13912, 13913, 13913, 13913, 13914, 13915, 13918, 13919, 13923, 13927, 13963, 13978, 13979, 13981, 13983, 13984, 13988, 13992, 13994, 11000, 11003, 11030, 11032, 11032...etc

Note: 1.8 ohm.
Use w/27-82022 Stator.



30-82025

Rotor

12V, 80 Amp

Replaces:

Size: 186mm OD, 142.8mm OAL

Lester: 11194, 11203, 11354

Note: Use w/27-82023 Stator.



30-82033

Rotor


24V, 80Amp

Used on: Hino Truck

Size:

Lester:

Note: Use w/27-82031 Stator.



30-82018

Rotor

12V, 220 Amp

Replaces: 121200-1960

Size: 109mm OD

Lester: 11181, 11379, 11380, 11532, 11534, 11576, 11629...etc

Note: 1.8 ohm.
Use w/27-82024 Stator.



30-82026

Rotor

12V, Amp

For: Denso Hair Pin Alternators

Used on:


Replaces:

Size: 93.40mm OD
145mm OAL

OE:

Lester:

Note: Use w/27-82025 Stator.



30-82034

Rotor

CCW, 12V, 220-240Amp

Replaces:

Size:

Lester:

Note: Used w/27-82024 Stator.
Pulley Nut use 85-82001F-CCW.

31-Rectifier



31-82038
Rectifier
117mm OD

M8x1.25x42mm Side Post
120-160 Amp, 12-40A Diodes

Replaces: 021580-5891

Lester: 11030, 11062, 11063, 11093,
11099, 11109, 11114, 11205,
11206, 11291, 11292, 11432,
13868, 13870, 13871, 13912,
13913, 13992

Ref: INR421

Note: Nut: 85-82026 (M8x17.75mmL)
Post: 84-82054 (M8x44.2mmOAL)



31-82038A
Rectifier
117 mm OD

M8x 1.50 Batt. Term Side Post
50A Diodes

Replaces: 021580-5891, 021580-5901

Lester: 11030, 11063, 11093, 11099,
11109, 11205, 11299, 11583,
13868, 13870, 13871, 13912,
13913, 13913CP, 13992

Ref: INR421

Note: Avalanche Doide



31-82040
Rectifier
134mm OD

M8x1.25x38mm Side Post
200 Amp, 12-50A Diodes

Replaces:

Lester: 11328, 11405, 11496

Ref: INR440

Note: Nut: 85-82033



31-82041
Rectifier
117mm OD

M8x1.25x37mm Side Post
100-120 Amp, 7-40A Diodes

Replaces: 021580-5891, -5901, -6381

Lester: 11030, 11062, 11063, 11099,
11110, 11240, 13868, 13870,
13871, 13912, 13913, 13988

Ref: INR423

Note: Use 17.3mm OAL Nut



31-82042
Rectifier
117mm OD

M6x1.0x35.6mm Top Post
Amp, A Diodes

Replaces: 021580-5920

Lester: 11003, 11035, 11036, 11037,
11044, 11046, 11146, 11180,
11428, 13919, 13978

Ref: INR425

Note: Nut: 85-82029
Post: 84-82052



31-82043
Rectifier
117mm OD

M6x1.0x30.6mm Top Post
105 Amp, 6-50A Diodes

Replaces: 021580-6490

Lester: 13980

Ref: INR429

Note: Avalanche diodes
Nut: 85-82028 (19mmOAL)
Post: 84-82050 (32mmL)



31-82044
Rectifier
117mm OD

M8x1.25x30.6mm Side Post
105 Amp, 12-50A Diodes

Replaces: 021580-6450

OE: 104210-392 (Early Type)

Lester: 12660 (Early Type)

Ref: INR439

Note: Avalanche diodes
Nut: 85-82028 (19mmOAL)
Post: 84-82050 (32mmL)



31-82045
Rectifier
117mm OD


M6x1.0x29mm Side Post
100 Amp, 6-50A Diodes

Replaces: 021580-6610

Lester: 11033, 11034, 11088, 11136,
11138, 11153, 11195, 11201*,
11322, 11324, 11350, 11385,
11386, 11400, 11516, 11519

Ref: INR430, W065-220

Note: Nut: 85-82027
Post: 84-82051

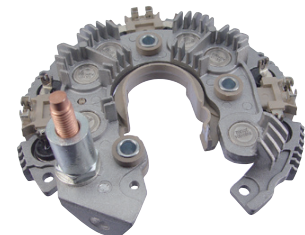

31-82046
Rectifier
134mm OD

M8x1.25x46mm Top Post
220 Amp, 12-50A Diodes

Replaces: A628-01707-10K29-775

A628-05233-6K05-777

Lester: 11181, 11251, 11252, 11290,
11576, 11598

Ref: INR435


Note: 24V-50A Non-Avalanche diodes

31-Rectifier




31-82047
Rectifier
117mm OD
M6x1.0xmm Side Post
130 Amp, 12-50A Diodes

Replaces:
Lester: 13994
Ref: INR442
Note: Nut: 85-82027
Post: 84-82051




31-82050
Rectifier
117mm OD
M6x1.0x29mm Side Post
130-136 Amp, 12-50A Diodes

Replaces: 021580-6520
Lester: 11032, 11201, 14072, 20226
Ref: INR422
Note: Nut: 85-82027
Post: 84-82051




31-82053
Rectifier
117 mm OD
M6x1.0 Side Post
130 Amp, 12-50 A Diodes

Replaces:
Lester: 11032, 11033, 11084, 11139, 11198, 11351, 13927, 13984, 23947
Ref: INR427
Note:




31-82048
Rectifier
117mm OD
M8x1.25 Top Post
130-160 Amp, 12-50A Diodes

Replaces:
Lester: 11040, 11112, 11113, 11155, 11286, 11323, 11381, 11382, 11383, 11401, 11570, 11572, 23830, 23941
Ref: INR432, W065-202
Note: Nut: 85-82034
Post: 84-82056




31-82051
Rectifier
117mm OD
M8 x 1.25 x 42mm Top Post
130 Amp, 12-50A Diodes

Replaces:
Lester: 11291, 11368, 13918
Ref: INR424
Note:

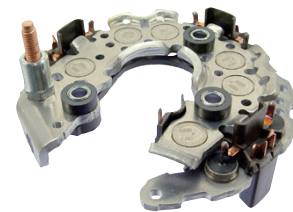


31-82054
Rectifier
117 mm OD
M6x1.0 Top Post
100 Amp, 12-50 A Diodes

Replaces:
Lester: 11154, 11604, 13980
Ref: INR428
Note:



31-82049
Rectifier
117mm OD
M8x1.25x42mm Top Post
130-136 Amp, 12-50A Diodes
Replaces: 021580-5931, 021580-5911
Lester: 11039, 11048, 13867, 13914, 13915, 13923
Ref: INR420, W065-200
Note: Nut: 85-82027
Post: 84-82051




31-82052
Rectifier
117mm OD
M6 x 1.0 Top Post
120-150 Amp, 12-50A Diodes
Replaces: 021580-6370
Lester: 11090, 11196, 11238, 11323, 11326, 11352, 11430, 11431, 13981
Ref: INR426
Note: Avalanche diodes
Post: 84-82051

Photo
Coming Soon

31-82055
Rectifier
117 mm OD
M8x1.25 Side Post
120 Amp, 7-50 A Diodes
Replaces:
Lester: 23820, 23839
Ref: INR431
Note: European car use

31-Rectifier



31-82056

Rectifier
117 mm OD
M8x1.25 Top Post
130 Amp, 12-50 A Diodes

Replaces:

Lester: 11030, 11062, 11140, 11150,
11151, 11197, 11391, 11392,
24028

Ref: INR433

Note:



31-82057


Rectifier
117 mm OD
M8x1.25 Side Post
140 Amp, 12-50 A Diodes

Replaces: 021580-7451

Lester: 11114, 11204, 11240, 11243,
11276, 11285, 11294, 11295,
11297, 11298, 11378, 11636

Ref: INR434

Note:



31-82058

Rectifier
117 mm OD
M8x1.25 Top Post
135-155 Amp, 12-50 A Diodes

Replaces:

Lester: 11156, 11178, 11179, 11250,
11369

Ref: INR436

Note:



31-82059

Rectifier
117 mm OD
M8x1.25 Side Post
150 Amp, 12-50 A Diodes

Replaces: 021580-7451

Lester: 11054, 11093, 20215, 20215,
23820, 23821, 23913,
24047, 24070, 24086

Ref: INR437

Note: European car use

**Photo
Coming Soon**

31-82060

Rectifier
105 mm OD
M6x1.0 Side Post
80 Amp, 6-50 A Diodes

Replaces:

Lester: 23371

Ref: INR438

Note:

**Photo
Coming Soon**

31-82061


117 mm OD
M8x 1.50 Batt. Term
12-50A Diodes

Replaces:

Lester:

Ref:

Note:

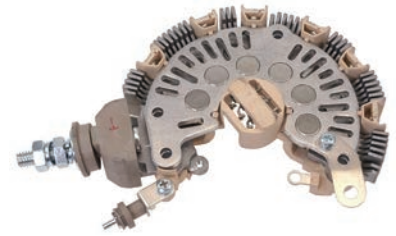

31-82062

Rectifier
150.5mm OD
Hair Pin, Side Post
180 Amp, 12-50A Diodes

Replaces: 021580-7471

Lester: 12859, 14793

Ref:

Note: Batt Post 5/16-18"
Batt Post Length 57.5mm
Terminal Post 3mm no thread



31-82063

Rectifier
132mm OD
M8 x 1.25 Batt. Term Side Post
180 Amp, 12-50A Diodes

Replaces: 021580-3009, 021580-3010,
021580-3038

Lester: 14009, 14020, 44005, 8913

Ref: INR459

Note: Avalanche diodes



31-82064

Rectifier
132mm OD
M8 x 1.25 Batt. Term Top Post
180 Amp, 12-50A Diodes

Replaces:

Lester: 11645


Ref:

Note:

31-Rectifier


DE	SRE	CLUTCH PULLEY	Cap & Tool for Clutch Pulley	Solid PULLEY	Stator	Slip Ring	Rotor	Rectifier and Parts	Diode	Regulator , Terminal Block	Brush Holder and Parts	Insulator	SRE COVER	Misc. Parts	B+ Term. Post & Nut	Hardware
Photo Coming Soon 31-82065 132 mm OD M8 x 1.25 Batt. Term Top Post 180 Amp, 12-50A Diodes Replaces: Denso 3946 Lester: 11575, 11592, 11598 Ref: INR454 Note: Non-Avalanche Diode Photo Coming Soon 31-82066 Rectifier 144.2 mm OD M6 x 1.0 Batt. Term Side Post 125 Amp, 7-50 A Diodes Replaces: 021580-0040 Lester: 11776, 11777, 11954 Ref: INR476 Note: Avalanche Photo Coming Soon 31-82067 Rectifier 132 mm OD M8 x 1.25 Batt. Term Side Post 125 Amp, 12-50 A Diodes Replaces: Denso 1590 Lester: 11930, 11931, 41002 Ref: INR493 Note: Honda, Subaru																

31-Rectifier Repair Prarts and Kits

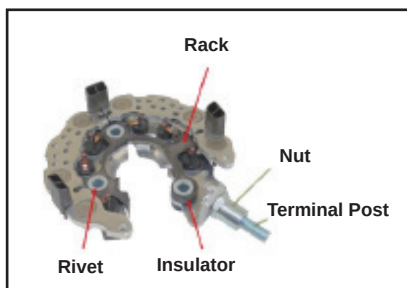


31-82210
Rack-Rectifier

Used on:
Ref:
Note: for Repair Kit 31-82503

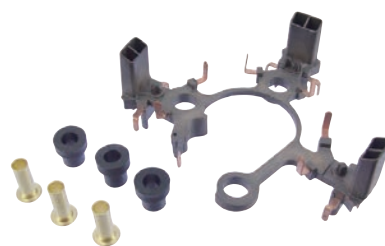

31-82501
Repair Kit-Rectifier

Used on: 31-82038, 31-82042
Ref: INR420, INR421, INR424, INR425, INR426, INR427, INR434, INR437
Note: Rack Frame from 31-82208

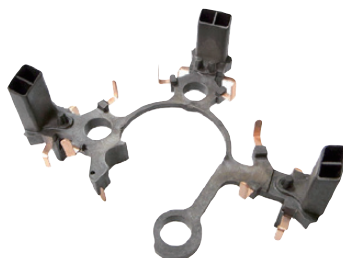

31-82208
Rack-Rectifier

Usde on: 31-82038, 31-82042
Replaces:
Size:
OE:
Lester:
Ref: INR420, INR421, INR424, INR425, INR426, INR427, INR434, INR437
Note: for Repair Kit 31-82501



31-82207
Rack-Rectifier

Usde on: Chrysler, Dodge, Jeep
OE: 421000-001, 002, 004, 006, 421000-010, 030, 0301
Size: 7mm ID
9.8mm x 13.8mm
13.9mm OAL
Lester: 11063, 13870, 13871, 13912, 13913
Ref:
Note:



31-82502
Repair Kit-Rectifier

Used on: 31-82041, 31-82043, 31-82045
Ref: INR423, INR429, INR430, INR431, INR438
Note: Rack Frame from 31-82209




31-82209
Rack-Rectifier

Used on: 31-82041, 31-82043, 31-82045
Ref: INR423, INR429, INR430, INR431, INR438
Note: for Repair Kit 31-82502



31-82303
Rivet-Rectifier (Brass)

Replaces:
Size: 6.9mm ID, 18mm L
OE:
Lester:
Ref:
Note:



31-82503
Repair Kit-Rectifier

Used on: 31-82041, 31-82043, 31-82045
Ref: INR423, INR429, INR430, INR431, INR438
Note: Rack Frame from 31-82210

32-Diodes

[illegible]

35-Regulator



35-82084-1
Regulator
Oval, 3-Pins
AVS-RC-LI

Used on: Ford, Lincoln

Replaces: 126600-3430, 126600-3460

OE: 104210-111, -297, -543, -563, -582
104210-582, -596, -597, -610, -618
104210-627, -634, -641, -649, -660
104210-663, -666, -667, -671
104211-023, -028
421000-704, -705

Lester: 11204, 11290, 11291, 11292,
11293, 11431, 11432, 11434,
11527, 11621, 11622, 11623,
11624, 11641, 11993, 23820,
23821, 23839, 23913, 24047

Ref: IN6343



35-82086
Regulator
Square, 4-Pins
IG-C-L-FR, LRC

Used on: Acura, Honda

Replaces: 126600-3660

OE: 104210-5890

Lester: 11390

Ref: IN6366

Note: L-Terminal no Output



35-82087
Regulator
Oval, 3-Pins
S-IG-LI

Used on: John Deere, Lexus, Jaguar

Replaces: 126600-0011

OE: 104210-303, -308, 392, -504

Lester: 12660, 13992, 13979, 23830

Ref: IN6001



35-82088
Regulator
Square, 4-Pins
IG-S-L-M (FR), LRC

Used on: Lexus, Toyota

Replaces: 126600-3010

OE: 104210-146, -214, -227, -234, -263
104210-265, -345, -348, -362, -365
104210-366, -375, -378, -379, -388
104210-389, -403, -418, -419, -481
104210-488, -508, -509, -510, -533
104210-548, -549, -551,
104211-354, -376, -803, -843, -864
104211-881

Lester: 11032, 11033, 11034, 11084,
11088, 11195, 11326, 11350,
11351, 11352, 11385, 11386,
11402, 11404, 13981

Ref: IN6301

Note: L-Terminal no Output



35-82089
Regulator
Square, 4-Pins
S-IG-L-M (FR)

Used on: Honda, Lexus, Toyota

Replaces: 126600-3000

OE: 104210-205, -347, -420, -423, -468
104210-487, -492

Lester: 11138, 11139, 11196, 11324,
13984, 24110

Ref: IN6300, W085-291

Note: Without LRC
L-Terminal no Output



35-82090
Regulator
Square, 4-Pins
S-IG-L-M (FR)

Used on: Acura, Honda

Replaces: 126600-3150

OE: 104210-160, -180, -189, -199, -287
104210-310, -350, -429, -430, -448
104210-469
104211-827, -830, -851

Lester: 11030, 11150, 11151

Ref: IN6315

Note: L-Terminal no Output



35-82092
Regulator
Square, 4-Pins
S-IG-L-M (FR)

Used on: Lexus, Scion, Toyota

Replaces: 126600-3230


OE: 104210-207, -210, -447, -457, -483

Lester: 11136, 11137

Ref: IN6323

Note: L-Terminal no Output

35-Regulator

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY Stator Slip Ring Rotor Rectifier and Parts Diode Regulator 'Terminal Block Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	 35-82094 Regulator Oval, 3-Pins BVS-RC-LI Used on: Ford, Lincoln, Land Rover Replaces: 126600-3460, 126600-7140 OE: 104210-370, -409, -470, -530, -669 Lester: 11205, 11238, 11430, 11667, 23820, 23839 Ref: IN6601 Note: Lamp control: PCM Voltage control: PCM	 35-82099 Regulator Square, 4-Pins C-FR-IG-L, LRC Used on: Acura, Honda Replaces: 126600-0140, -3200, -3350 OE: 104210-329, 473 Lester: 13980 Ref: IN6335	 35-82102 Regulator Square, 2-Pins L-DFM Used on: Jeep Replaces: 126600-3531 OE: 104210-317, -324, -424 Lester: 11114, 23229 Ref: IN317
	 35-82095 Regulator Oval, 3-Pins LI-RC-AS Used on: Ford, Lincoln Replaces: 126600-4200 OE: 104210-127, -293, -296, -297, -667, 104211-019 Lester: 11527, 11621, 11622, 11623, 11624, 11641 Ref: IN6343 Note: similar to 35-82084-1	 35-82100 Regulator Square, 4-Pins IG-S-L-M Used on: Toyota Replaces: 126600-3531 Note: similar to 35-82088	 35-82103 Regulator Square, 4-Pins NC-NC-L-FR Used on: Saturn Replaces: 126600-3080 OE: 104210-377, -431, -581 Lester: 11062, 11387 Ref: IN6308
	 35-82097 Regulator Oval, 3-Pins LI-RC-AS Used on: Ford Replaces: 126600-3600, -4210 OE: 104210-030, -292, -595, -622, -656, 104210-657; 104211-031 Lester: 11368, 11627, 11628, 11664, 11665	 35-82101 Regulator Square, 4-Pins IG-S-L-M(FR) Used on: Lexus, Toyota Replaces: 126600-0150 OE: 104210-338, -339, -341, -344, -346, 104210-393, -400, -451, -511, -802, 104210-901 Lester: 11087, 11090, 11153, 11197, 11198, 11157, 13983, 13994, 11571, 23317 Ref: IN6015	 35-82104 Regulator Oval, 3-Pins S-IG-L Used on: Lexus, Toyota Replaces: 126600-002 OE: 104210-304, -312, -314 Lester: 13905, 13927, 13963 Ref: IN6002

35-Regulator



35-82105
Regulator
Oval, 3-Pins
S-F-L

Used on: Buick, Cadillac, Pontiac
Replaces: 126600-003
OE: 104210-306, -307, -330, -454
Lester: 11035, 13919
Ref: IN6003



35-82106
Regulator
Square, 4-Pins
IG-C-L-FR

Used on: Acura, Honda
Replaces: 126600-004
OE: 104210-309
Lester: 13918
Ref: IN6004



35-82107
Regulator
Oval, 2-Pins
F-L

Used on: Buick, Cadillac, Chevrolet,
Pontiac, Saturn
Replaces: 126600-0090
OE: 104210-328, -330, -331, -334, -414
104210-438, -441, -449
Lester: 11003, 11036, 11037, 11109,
11146
Ref: IN6009

**Photo
Coming Soon**

35-82108
Regulator
Oval, 3-Pins
S(AS)-L(IG)-AM(LI)

Used on: Ford, Lincoln
Replaces: 126600-0110
OE: 104210-332, -321, -415, -416, -491
Lester: 11000, 13978
Ref: IN6011



35-82109
Regulator
Square, 4-Pins
IG-RLO-L-M

Used on: Lexus, Toyota
Replaces: 126600-302, -332
OE: 104210-209, -474, -475, -479, -613
Lester: 11021, 11322, 11323, 11328,
23947
Ref: IN6302
Note: may use 35-82093



35-82110
Regulator
Oval, 2-Pins
F-L

Used on: Buick, Cadillac, Chevy, GMC,
Pontiac, Saturn
Replaces: 126600-324, -344
OE: 104210-196, -319, -326, -332,
104210-422, -433, -434, -436,
104210-437, -442, -539, -599,
104210-600, -611, -616, -631
104211-035, -817, -834, -835, -911
Lester: 11038, 11044, 11046, 11110,
11140, 11178, 11179, 11180,
11181, 11248, 11252, 11369,
11785, 11795, 14007, 14019,
14020, 14883
Ref: IN6324



35-82111
Regulator
Oval, 2-Pins
F-L

Used on: Chevrolet, GMC, Pontiac,
Saturn
Replaces: 126600-329
OE: 104210-216, -289, -456, -507, -525
104210-538, -541
104211- 813
Lester: 11156, 11183, 11237, 11250,
11787, 14021
Ref: IN6329

35-Regulator



35-82112
Regulator
Oval, 3-Pins
LI-RC-BVS

Used on: Land Rover
Replaces: 126600-349
OE: 104210-3691, -3711
Lester: 11569, 24028
Ref: IN6329



35-82116
Regulator
Single Pin
LIN

Used on: Acura, Honda
Replaces: 126600-3970
OE: 104210-149, -153
Lester: 11604, 11768, 11931, 20971, 21126, 21154
Ref: AH-10138



35-82118
Regulator
Single Pin
LIN2.0

Used on: Acura, Honda
Replaces: 126600-4180
OE: 104210-1890, 104211-3710, 104211-4340, 104211-8270, 104211-8300, 104211-8390, 104211-8510, TN104211-8300
Lester: 11670, 11671, 11672, 11773, 21237, 21238
Ref: IN4180, W085-376A



35-82113
Regulator
Square, 4-Pins
IG-C-L-FR

Used on: Honda
Replaces: 126600-365
OE: 104210-591, -592
Lester: 11391, 11392
Ref: IN6365



35-82117
Regulator
Oval, 3-Pins
AS-RC-LI

Used on: Ford, Mercury
Replaces: 126600-3970
OE: 104210-202, -292, -585, -595, -622, 104210-656, -657, -681, -682, -684, 104210-685, -686, -690, 104211-006, -007, -030, -078,
Lester: 11368, 11427, 11428, 11433, 11526, 11532, 11625, 11627, 11628, 11629, 11664, 11665
Ref: AE-1047, IN6368



35-82119
Regulator
2-Pins, L-FR

Used on: Toyota
Replaces: 126600-4490
OE: 104211-3301, 104211-3303
Lester: 11776
Ref: IN6402



35-82115
Regulator
Oval, 3-Pins
I(L)-D-FR

Used on: Volvo
Replaces: 126600-7120
OE: 104210-356, -405
Lester: 11054, 11093
Ref: AN-1086, W085-338, W085-338A

Hardware	B+ Term. Post & Nut	Misc. Pars	SRE COVER	Insulator	Brush Holder and Parts	Regulator ,Terminal Block	Diode	Rectifier and Parts	Rotor	Slip Ring	Stator	Solid PULLEY	Cap & Tool for Clutch Pulley	CLUTCH PULLEY	SRE	DE
----------	------------------------	------------	--------------	-----------	------------------------------	---------------------------------	-------	------------------------	-------	-----------	--------	-----------------	------------------------------------	------------------	-----	----

35-82120
Regulator
Hairpin IR/IF

Replaces: 126600-3910

Lester: 11585, 11594, 11771, 20503
Ref: IN3910

**Replaces:** 126000-2540

Ref: IN9254



Ref:



Ref: IN3054



Ref: IN3570



Ref: IN6370

35-Regulator



35-82126
Regulator
Oval, C-L-FR

Used on: Hyundai, Kia
Replaces: Denso GC7A 4480
OE: 104211-8590, 104211-8591,
104211-8790, TN104211-8790
Lester: 11953, 20997
Ref: IN4480



35-82127
Regulator
Oval, 1 Pin LIN

Used on: Toyota
Replaces: GC104960
OE: 104210-0971, TN104210-0971
Lester: 21248
Ref: IN4960




35-82128
Regulator
Denso ER/IF

Converter for Cummins 1-wire
Used on: Chrysler, Dodge, Jeep
Replaces: 126600-365
OE: 121000-2430, 2490, 2660, 2680,
121000-3000, 3300, 3310, 3330,
121000-3340, 3370, 3380, 3390,
121000-3400, 3410, 3430, 3440,
121000-3450, 3452, 3460, 3470,
121000-3530, 3531, 3600, 4000,
121000-4010, 4030, 4040, 4041,
121000-4050, 4060, 4080, 4090,
121000-4100, 4110, 4130, 4150,
121000-4151, 9712109-338
Lester: 13184, 13185, 13220, 13245,
13256, 13280, 13301, 13302,
13304, 13305, 13306, 13307,
13308, 13309, 13310, 13312,
13313, 13341, 13353, 13354,
13442, 13453, 14869
Ref: IN8315



35-82129
Regulator
Denso Hairpin IR/IF
NC-COM-L-FR, 4 Pins

Used on: Hyundai, Kia
Replaces: Denso 3830, GC7 3830
OE: 104210-1060, 104210-1800,
104210-2870, 104211-8470
Lester: 11686, 11766, 20133
Ref: IN6320

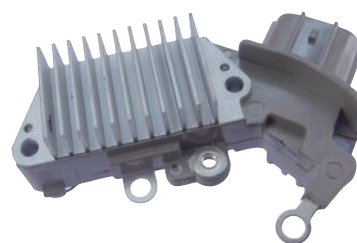

35-82130
Regulator
A-Circuit, M-IG-L, 3 Pins

Used on: Scion, Toyota
Replaces: 126000-3130, 126000-3131,
126000-3170, 126000-3171,
27700-21010, 27700-21020
OE: 102211-1950, 102211-1951,
102211-1960, 102211-2780,
102211-5260, 102211-5380,
102211-5650, 102211-9070,
102211-9100, 102211-9540,
9662219-195;
Lester: 11085, 13857, 13896, 23859
Ref: IN447



35-82131
Regulator
B-Circuit, 2 Pins

Used on: Isuzu
Replaces: 126600-1890
OE: 104210-9030, 104210-9031,
104210-9032, 104210-9033,
104210-9840, 104210-9960,
TG104210-9840, TG104210-9031,
TG104210-9032, TG104210-9033
Lester: 20212, 21241
Ref: IN6385

46-Terminal Block



46-82172
Terminal Block

Replaces:
OE: 421000-038, -041, -048, -051, -052
 421000-054, -055, -056, -066, -067
 421000-070, -072, -073
Lester: 11241, 11243, 11285, 11294,
 11295, 11296, 11297, 11298,
 11378, 11379, 11449, 11516,
 11583, 11756
Ref: 46-82208, AZ-18112



46-82198
Terminal Block

Replaces: 126220-0180
OE: 421000-001, -002, -003, -008, -022
 421000-049
Lester: 13867, 13870, 13871
Ref: INP421, AZ-1878



46-82201
Terminal Block

Replaces: 126220-0180
OE: 421000-037, -039, -042, -043, -044
 421000-047, -050, -053, -059, -062
 421000-071, -075, -077, -080, -702
 421000-703, -704, -705
Lester: 11240, 11276, 11286, 11382,
 11383, 11570, 11572, 11574,
 11575, 11576, 11592, 11598,
 11792
Ref: 46-82207, AZ-1895



46-82214
Terminal Block

Replaces: 126220-0230
OE: 421000-014, -030
Lester: 11063
Ref: 46-82205, AZ-1895



46-82215
Terminal Block

Replaces: 126220-0190, 126220-0191
OE: 421000-004, -005, -010, -015, -018
 421000-019, -020, -025, -026, -032
 421000-033, -034, -036, -060, -063
Lester: 11039, 11040, 11048, 11112,
 11113, 13912, 13913, 13914,
 13915, 13923
Ref: INP420, AZ-1876



46-82217
Terminal Block


Replaces: 126220-0190, 126220-0191
OE: 121000-252
 421000-006, -021, -023, -028, -036
Lester: 11155, 13868, 13988
Ref: 46-82204, AZ-1872

**Photo
Coming Soon**

46-82234
Terminal Block

Replaces:
OE: 121000-462, -463
Lester: 11242
Ref: 46-82209, AZ-1865

38-, 39-, 41- Brush Holder & Seals

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid Stator Slip Ring Rotor Rectifier and Parts Diode Regulator ' Terminal Block Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	 38-82001-1 Brush DIM: 5mm T x 7mm W x 15mm L x 48mm LL Replaces: 021660-039, -051 Ref: 38-8201, AT-0549A, AT-05325A Note: Used on most Denso Brush Holder	 39-82007 Brush Holder Assy Early Type Replaces: 021620-3001 OE: 104210-303, -304, -306, -307, -309 104210-312, -314, -328, -344, -346 104210-347, -392, -393 121000-252 421000-001, -002, -003, -004, -005. 421000-006, -008, -010, -011, -012, 421000-018, -019, -020, -032, -459 Lester: 11003, 11039, 11048, 11087, 11113, 12660, 13867, 13868, 13870, 13871, 13905, 13912, 13913, 13913CP, 13914, 13915, 13918, 13919, 13923, 13927, 13963, 13983, 13984, 13988, 13992, 23830 Ref: 39-8207, AZ-0672 Note: Used w/41-82007 Gasket (Seal)	 39-82010 Cover-Brush Holder Early Type use Replaces: 021620-3001 Ref: 46-82485, AZ-0672C Note: Used on 39-82007 Early Type Brush Holder
	 39-82005 Spring DIM: 5.4mm OD x 38mm L 0.35mm Wire Replaces: 021660-039, -051 Ref: 39-82700, AT-2149 Note: Used on most Denso Brush Holder	 39-82008-1 Brush Holder Assy Late Type Replaces: 021620-3040, 021620-3020 OE: Lester: Ref: 39-8206, AT-06266 Note: Used on Most Late type Denso Hair Pin	 39-82011 Cover-Brush Holder Early Type use Replaces: 021620-3001 Ref: 46-82483, AT-06274C Note: Used on 39-82008-1 Late Type Brush Holder

38-, 39-, 41- Brush Holder & Seals



41-82003

Seal-Brush Holder 80-160 Amp Alternators

DIM: 19mm ID, 26mm W, 35mm OL,
1.7mmTH

Replaces: 021626-0080, 021626-0190

OE:

Lester: 12066, 12194, 12195, 13252,
13276, 13278, 13321, 13323,
13325, 13506, 13507... etc

Ref: 41-82101, AT-0694A

Note: Orange Color
For thinner use 41-82008



41-82008

Seal-Brush Holder 80-160 Amp Alternators

DIM: 19mm ID, 26mm W, 35mm OL,
1mmTH

Replaces: 021626-0080, 021626-0190

OE:

Lester: 12066, 12194, 12195, 13252,
13276, 13278, 13321, 13323,
13325, 13506, 13507... etc

Ref: 41-82101, AT-0694A

Note: Orange Color
For thinner use 41-82008



41-82007

Seal-Brush Holder 120-160 Amp Alternators

Replaces: 021626-0510

OE: 104210-303, -304, -306, -307, -309
104210-312, -314, -328, -344, -346
104210-347, -392, -393
121000-252

421000-001, -002, -003, -004, -005,
421000-006, -008, -010, -011, -012,
421000-018, -019, -020, -032, -459

Lester: 11003, 11039, 11048, 11087,
11113, 12660, 13867, 13868,
13870, 13871, 13905, 13912,
13913, 13913CP, 13914, 13915,
13918, 13919, 13923, 13927,
13963, 13983, 13984, 13988,
13992, 23830

Ref: 41-82103, AZ-0672A, W115-156

Note: Used w/ 39-82007 Early Type
Brush Holder



41-82009

Seal-Brush Holder 80-160 Amp Alternators

For: Denso Hair Pin Alternators

DIM: 19mm ID, 26mm W, 35mm OL

Replaces:

OE:

Lester:

Note: Orange Color.

42-Insulator

DE	SRE	CLUTCH PULLEY	Cap & Tool for Clutch Pulley	Solid PULLEY	Stator	Slip Ring	Rotor	Rectifier and Parts	Diode	Regulator , Terminal Block	Brush Holder and Parts	Insulator	COVER	SRE	Misc. Parts	B+ Term. Post & Nut	Hardware
																	
42-82048 Insulator B+ Teminal-for Side M8 Post DIM: 14mm ID, 25.7mm OD, 16.8mm OAL Replaces:021605-3070 OE: 104210-424, -433, -442; 121000-252; 421000-001, -004, -010, -022, -043, 421000-047 Lester: 11110, 11114, 11140, 11240, 11276, 13868, 13870, 13871, 13912, 13913 Ref: 42-82325, W115-153 Note: 2 Slot																	
																	
42-82050 Insulator B+ Teminal-for Side M8 Post DIM: 14mm ID, 28mm OD, 17mm OAL Replaces:021605-3050, 021605-3110 OE: 104210-303, -308, -310, -312, -314, 104210-319, -320, -321, -326, -328, 104210-330, -331, -332, -334, -338, 104210-344, -346, -347, -350, -369, 104210-370, -388, -392, -414, -415, 104210-418, -422, -424, -435, -436, 104210-438, -441, -442, -443, -491, 104210-499, -507 Lester: 11059, 11063, 11109, 11297, 11298, 11367, 11378, 11401, 11449, 13867, 13868, 13870, 13871, 13912, 13913 Ref: 42-82323, W115-153, AZ-1895C Note: 4 Slot																	
																	
42-82053 Insulator B+ Teminal-for Side M8 Post DIM: 17.5mm ID, 27.6mm OD, 17mm OAL Replaces: OE: 421000-700, -716 Lester: 11379 Ref: W115-210, AZ-18119C Note:																	
																	
42-82056 Insulator B+ Teminal-for Top M8 Post D-Shape Interlock DIM: 14.5mm ID, 17.9mm OAL Replaces: OE: Lester: Ref: Note:																	
																	
42-82049 Insulator B+ Teminal-for Top M8 Post D-Shape Interlock DIM: 14mm ID, 28mm OD, 15mm OAL Replaces:021605-3080, 021605-3120 OE: 104210-424, -433, -442; 121000-252; 421000-001, -004, -010, -022, -043, 421000-047 Lester: 11039, 11040, 11112, 11113, 11155, 11241, 11244, 11401, 11570, 11572, 13867, 13914, 13915, 13923 Ref: 42-82327, W115-224 Note: 4 Slot For M6 use 42-82088.																	
																	
42-82051 Insulator B+ Teminal-for Top M8 Post D-Shape Interlock DIM: 14mm ID, 23.7mm OD, 17.4mm OAL Replaces:021605-3330 OE: 104210-329, -473, -516 Lester: 11154, 13980 Ref: W115-163, AH-18113C Note: Used w/ 46-82169																	
																	
42-82057 Insulator B+ Teminal-for Top M8 Post D-Shape Interlock DIM: 14mm ID, 24mm OAL Replaces:31119-R40-A01 OE: 104210-589 Lester: 11390 Ref: AH-18132 Note:																	

42-Insulator



42-82058

Insulator B+ Terminal-for Top D-Shape Interlock

DIM: 14.8mm ID, 27mm OD, 37.3mm OAL

Replaces:

OE:

Lester:

Ref:

Note: Similar to 42-82066, but the top open on different direction.



42-82059-1

Insulator B+ Terminal-for Side M6 Post

DIM: 12.5mm ID, 25.5mm OD, 16.8mm OAL

Replaces: 021605-3090

OE: 104210-100, -146, -207, -257, -263, 104210-265, -270, -280, -283, -284, 104210-304, -312, -338, -365, -369, 104210-375, -379, -418, -423, -447, 104210-479, -481, -488, -548, -551, 104210-846, -881

Lester: 11032, 11033, 11136, 11138, 11195, 11201, 11386, 11404, 11516, 11517, 11519, 11521, 11522, 11577, 11758, 11767, 13905, 13927, 13994, 23317

Ref: 42-82335, W115-173, AT-18266C

Note: 4 slot



42-82060

Insulator B+ Terminal-for Top D-Shape Interlock

DIM: 14.6mm ID, 27mm OD, 26mm OAL

Replaces:

OE:

Lester:

Ref:

Note:



42-82061

Insulator B+ Terminal-for Side

DIM: 16.2mm ID, 28.8mm OAL

Replaces:

OE: 104210-351, -356, -405, -464

Lester: 11054, 11093, 11782, 23820

Ref: W115-214, AN-1886C, 42-82351

Note:



42-82063

Insulator B+ Terminal-for Top D-Shape Interlock

DIM: 14.5mm ID, 24.6mm OD, 19.6mm OAL

Replaces:

OE: 104210-180, -287, -456, -564, -581

Lester: 11178, 11183, 11387, 11524, 11591, 11686

Ref: AN-18148C

Note: 4 slot



42-82064

Insulator B+ Terminal-for Side

DIM: 14.5mm ID, 17.2mm OD, 35mm OAL

Replaces:

OE: 104210-124, -160, -189, -310, 104210-350, -377, -429, -430, 104210-431, -448, -469, -591, 104210-592, -347, -371, -391, 104211-827, -830, -852

Lester: 11030, 11062, 11150, 11151, 11391, 11392, 11573, 11600, 11670, 11671, 11672, 11775

Ref: W115-189, AH-18123C



42-82066

Insulator B+ Terminal-for Top D-Shape Interlock

DIM: 14.7mm ID, 27mm OD, 37.25mm OAL

Replaces: 021605-3190

OE: 104210-309

Lester: 13918

Ref: W115-154, AH-18107C

Note: Similar to 42-82058, but top open on different direction



42-82068

Insulator B+ Terminal-for Top D-Shape Interlock

DIM: 8.6mm ID, 27.1mm OAL

Replaces:

OE:

Lester:

Ref:

Note:

42-Insulator

	 42-82069 Insulator B+ Terminal-for Top D-Shape Interlock DIM: 17.75mm ID, 28.75mm OAL Replaces: OE: 104210-610 Lester: 11290 Ref: W115-211, AE-1831C Note:	 42-82072 Insulator B+ Terminal-for Side DIM: 14.75mm ID, 35.3mm OAL Replaces: OE: 104210-591, 104210-592 Lester: 11391, 11392 Ref: W115-222 Note: Similar to 42-82064, but 42-82072 w/key slot	 42-82076 Insulator B+ Terminal-for Side DIM: 12.5mm ID, 28mm OAL Replaces: OE: Lester: Ref: Note:
	 42-82070 Insulator B+ Terminal-for Side DIM: 14.6mm ID, 32.5mm OAL Replaces: OE: 104210-681, -682, -683, -684, -685 104210, -686, -690, 104211-067, -078, -891 Lester: 11292, 11293 Ref: W115-223, AE-1886C Note:	 42-82073 Insulator B+ Terminal-for Side DIM: 12mm ID, 20mm OD, 22.2mm OAL Replaces: OE: 104210-321, -416 Lester: 11000 Ref: W115-220 Note:	 42-82081 Insulator B+ Terminal-for Side M6 Post DIM: 12mm ID, 22mm OAL Replaces: OE: 104210-563 Lester: 11431 Ref: Note:
	 42-82071 Insulator B+ Terminal-for Top D-Shape Interlock DIM: 14.6mm ID, 26.25mm OAL Replaces: OE: Lester: Ref: Note: Used w/ 46-82230	 42-82075 Insulator B+ Terminal-for Top D-Shape Interlock DIM: 14.5mm ID, 30mm OAL Replaces: OE: Lester: Ref: Note:	 42-82082 Insulator B+ Terminal-for Top M8 Post DIM: 17.5mm ID, 15mm OAL Replaces: OE: 421000-704, 421000-705 Lester: 11575, 11576, 11592, 11598 Ref: AZ-18133C Note:

42-Insulator



42-82084

Insulator B+ Teminal-for Side M8 Post

DIM: 17.6mm ID, 24.7mm OAL

Replaces:

OE: 104210-639

Lester: 14203, 14204, 21738

Ref: W115-240

Note:



42-82088

Insulator B+ Teminal-for Top M6 Post

DIM: 14.5mm ID, 30.5mm OD, 15.1mm OAL

Replaces:

OE:

Lester:

Ref:

Note: For M8 use 42-82049



42-82093

Insulator B+ Teminal for Top

DIM: 8.6mm, 26.5mm OD 26.7mm L

Replaces:

OE:

Lester:

Ref:

Note:



42-82085

Insulator B+ Teminal-for Side M8 Post

DIM: 17mm ID, 31.5mm OAL

Replaces:

OE:

Lester:

Ref:

Note:



42-82090

Insulator B+ Teminal for Side Denso IR/IF

DIM: 17.8mm ID, 19.7mm H

Used on: BMW

Replaces:

OE: 104210-6070, 104210-6072, 104210-6250, 104210-6251, 104210-6254, 7591268-01
12-31-7-591-268, 12-31-7-591-271, 12-31-7-591-529, 12-31-7-591-530

Lester: 11791, 11496

Ref:

Note:



42-82094

Insulator B+ Teminal for Side

DIM: 16.75mm ID, 30.87mm OD 28.05mm

Replaces:

OE:

Lester:

Ref:

Note:



42-82086

Insulator B+ Teminal-for Side M8 Post

DIM: 17mm ID, 31.5mm OAL

Replaces:

OE: 104210-618, -622, -654

Lester: 11434, 11627, 12884

Ref:

Note: similar to 42-82070



42-82092

Insulator B+ Teminal for Top HAIR PIN

DIM: 17.6mm ID, 26.9mm OD 28.5mm H

Used on: Ford

Replaces:

OE: 104210-6561, 104211-0310, TN104211-0310

Lester: 11665

Ref:

Note:



42-82095

Insulator B+ Teminal for Top

DIM: 14.68mm ID, 29.8mm T

Used on: Ford

Replaces:

OE: 104210-5950, TN104210-5950

Lester: 11368

Ref:

Note:

42-Insulator

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY Stator Slip Ring Rotor Rectifier and Parts Diode Regulator ' Terminal Block Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	 42-82096 Insulator B+ Teminal for Top Denso HAIR PIN DIM: 14.4mmID, 29.7mmOD 39mmH Replaces: OE: 104210-1750, TN104210-1750, 104211-8000 Lester: 11585, 11594 Ref: Note:	 42-82099 Insulator B+ Teminal for Top DIM: Replaces: OE: 104211-8660, MS104211-8660 Lester: 21184 Ref: Note:	
	Photo Coming Soon 42-82097 Insulator B+ Teminal DIM: 8.5mm ID Replaces: 021605-2890 OE: 101211-8290 Lester: 12344, 12464, 12466 Ref: Note:	 42-82100 Insulator B+ Teminal for Side DIM: 16.75mm ID, 27.91mm OD Replaces: OE: 104210-2170 Lester: 11507 Ref: Note:	
	 42-82098 Insulator B+ Teminal for Top Denso HAIR PIN DIM: 17.6mmID, 30mmOD 15mmH Replaces: OE: 104210-6420, 104210-6421 LR0-34013, -54994, -72764 Lester: 14016 Ref: Note: Land Rover	 42-82101 Insulator B+ Teminal for Top DIM: M6, 14.5mm ID Replaces: OE: Lester: 21237, 21238 Ref: Note:	

46-SRE Cover



46-82164
SRE Cover

For: Chrysler
DIM: 127mm OD
Replaces:
OE: 421000-006
Lester: 13868
Ref: 46-82487
Note: Early Type
 For Late Type use 46-82176



46-82167
SRE Cover

For: Chrysler
DIM: 127mm OD
Replaces: 021551-3450, 021551-3451
OE: 421000-001, 421000-002
Lester: 13870, 13871
Ref: 46-82475, W015-47, AZ-1378
Note: Early Type



46-82170
SRE Cover

For: Chrysler
DIM: 127mm OD
Replaces: 021551-3491
OE: 104210-306, 104210-307
Lester: 13919
Ref: 46-82477, W015-50, AJ-13100
Note: Early Type
 Late type use 46-82195.



46-82165
SRE Cover

For: Chrysler
DIM: 127mm OD
Replaces: 021551-3471, 021551-3680
OE: 421000-005, -011, -018, -019, -020, 421000-037
Lester: 11039, 11040*, 11048, 13914, 13915
Note: Early "q" Type
 *11040 Late Type use 46-82207
 *Similar to 46-82187, except inside Brush Holder area different.



46-82168
SRE Cover

For: Chrysler
DIM: 128mm OD
Replaces: 021551-3500
OE: 421000-003, -008, -012
Lester: 13867, 13923, 23830
Ref: W015-56, AZ-1384
Note: Early Type



46-82173
SRE Cover

For: Chrysler
DIM: 128mm OD
Replaces: 021551-4381
OE: 421000-022, -047, -049, -050, -053, 421000-059
Lester: 11240, 11276, 13870, 13871
Ref: 46-82474, W015-83
Note: Late Type



46-82166
SRE Cover

For: Lexus
DIM: 127mm OD
Replaces:
OE: 104210-304, 104210-312
Lester: 13905, 13927
Ref: W015-55
Note: Early Type
 For Late Type use 46-82176



46-82169
SRE Cover

For: Honda
DIM: 127mm OD
Replaces: 021551-4120
OE: 104210-329, -473, -516
Lester: 11154, 13980
Ref: 46-82495, W015-53
Note: Late Type
 Similar to 46-82191, but different Regulator hole opening.
 use w/Harness Connector



46-82174
SRE Cover

For: Toyota
DIM: 128mm OD
Replaces: 021551-4381
OE: 104210-339, -368, -451, -511, -512, 104210-619
Lester: 11090, 11153, 11198, 13994*
Ref: W015-77, AT-13274
Note: Late Type
 Early Type use 46-82189
 Similar to 46-82245, but 46-82245 is 43mm Height

46-SRE Cover



46-82175
SRE Cover

For: Toyota

DIM: 128mm OD

Replaces: 021551-4180, 021551-4650

OE: 104210-146, -205, -207, -209, -210, 104210-214, -227, -234, -235, -236, 104210-256, -257, -261, -263, -265, 104210-345, -348, -362, -365, -366, 104210-375, -378, -379, -388, -389, 104210-403, -418, -419, -420, -423, 104210-447, -457, -468, -474, -475, 104210-479, -481, -483, -487, -488, 104210-489, -492, -508, -509, -510, 104210-533, -548, -549, -551, 104211-329, -353, -354, -376, -803, 104211-843, -846*, -864, -881*

Lester: 11032, 11033, 11034, 11084, 11088, 11136, 11137, 11138, 11139, 11195, 11196, 11201, 11322, 11323, 11324, 11325, 11326, 11350, 11351, 11352, 11352, 11384, 11385, 11386, 11400, 11402, 11403, 11404, 11407, 11408, 11516, 11519, 11577, 11765, 11767*, 13905, 13981, 13984, 14486, 14487

Ref: W015-65, AT-13275

Note: Late Type



46-82176
SRE Cover

For: Chrysler

DIM: 128mm OD

Replaces: 021551-4030

OE: 421000-014, -021, -023, -028, -030, 421000-038, -041, -048, -051, -052, 421000-054, -056, -067, -070, -072, 421000-073, -072

Lester: 11063, 11243, 11285, 11294, 11295, 11296, 11297, 11298, 11299, 11378, 11449, 11583, 13868*, 13988

Ref: 46-82473, W015-54, AZ-1388

Note: Late Type
13868 for Early Type use
46-82164



46-82177
SRE Cover

For: Chrysler

DIM: 127mm OD

Replaces: 021551-3460

OE: 421000-004, 421000-010

Lester: 13912, 13913

Ref: 46-82476, W015-45, AZ-1376

Note: Early Type

Photo
Coming Soon

46-82179
SRE Cover

For: Opel

DIM: 127mm OD

Replaces:

OE: 102211-864, 102211-866

Lester: 23806, 23807, 23808

Ref: AL-1393

Note: Europe



46-82180
SRE Cover

For: Toyota

DIM: 137.5mm OD

Replaces:

OE: 104210-614, -625*, -640*, -678

Lester: 11405, 11761, 11791*, 14204*

Ref: W015-92, AE-1351

Note: Late Type

46-SRE Cover



46-82181
SRE Cover

For: Ford, Lincoln, Mustang
DIM: 128mm OD
Replaces:
OE: 104210-111, -297, -563, -586, -597
 104211-330
Lester: 11204, 11292, 11293, 11429,
 11431, 11432, 11527, 11622,
 11623, 11876
Ref: AE-1386
Note: Late Type



46-82182
SRE Cover

For: Toyota
DIM: 114.5mm OD
Replaces:
OE: 104210-9060
Lester:
Ref:
Note: Late Type



46-82183
SRE Cover

For: Ford
DIM: 120mm OD
Replaces:
OE: 104210-351, -363, -376
Lester: 20492, 23820, 23839, 23912,
 24046
Ref:
Note: Late Type, Europe



46-82185
SRE Cover

For:
DIM: 128mm OD
Replaces:
OE:
Lester:
Ref:
Note: Early Type



46-82186
SRE Cover

For:
DIM: 128mm OD
Replaces:
OE:
Lester:
Ref:
Note: Early Type



46-82187
SRE Cover

For:
DIM: 128mm OD
Replaces:
OE: 421000-011, 421000-005
Lester: 13914, 13915
Ref:
Note: Early Type
 Similar to 46-82165, but Brush
 Holder area different.



46-82188
SRE Cover

For: Volvo
DIM: 128mm OD
Replaces: 021551-4330
OE: 104210-271*, -352, -356, -370*,
 104210-405, -464
Lester: 11054, 11093, 11205*, 23821*
Ref: W015-95
Note: Late Type



46-82189
SRE Cover

For: Toyota
DIM: 128mm OD
Replaces: 021551-4330
OE: 104210-334, -346, -400
Lester: 11087, 11197, 13983, 13994
Ref: W015-59
Note: Early Type
 Late type use 46-82174



46-82190
SRE Cover

For: Land Rover
DIM: 128mm OD
Replaces:
OE: 104210-369, -370
Lester: 11206
Ref: W015-93
Note: Late Type

46-SRE Cover

DE SRE CLUTCH PULLEY Cap & Tool Pulley			
	46-82191 SRE Cover	46-82195 SRE Cover	46-82202 SRE Cover
	For: Honda DIM: 128mm OD Replaces: OE: 104210-5890 Lester: 11390 Ref: AH-13132 Note: Late Type Similar to 46-82169, but different Regulator hole opening. w/Harness connection hole	For: GM DIM: 128mm OD Replaces: OE: 104210-328, -330, -331, -334, -438, 104210-454, -499 Lester: 11003, 11035, 11036, 11037, 11146 Ref: W015-67, 46-824101 Note: Late Type Early type use 46-82170. No need use B+ Insulator	For: GM DIM: 137.5mm OD Replaces: OE: 104210-600, -601, -611, -616, -631 Lester: 11181, 11251, 11252 Ref: AJ-13160 Note: Late Type No need use B+ Insulator
			
Stator Slip Ring Rotor Rectifier and Parts Diode Regulator Terminal Block Brush Holder and Parts Insulator	46-82192 SRE Cover	46-82196 SRE Cover	46-82203 SRE Cover
	For: John Deere, Toyota DIM: 128mm OD Replaces: 021551-3600 OE: 104210-303, 104210-3920 (Early) Lester: 12660 (Early), 13992 Ref: W015-79, AT-13284 Note: Early Type Late type use 46-82206	For: GM DIM: 128mm OD Replaces: OE: 104210-433, 104210-442 Lester: 11110, 11140 Ref: W015-74 Note: Late Type	For: DIM: 128mm OD Replaces: OE: Lester: Ref: Note: Late Type
			
	46-82194 SRE Cover	46-82197 SRE Cover	46-82204 SRE Cover
SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	For: DIM: 128mm OD Replaces: OE: 104210-308, 104210-504 Lester: 13979 Ref: W015-58 Note: Late Type	For: GM, Suzuki DIM: 128mm OD Replaces: OE: 104210-216, -289, -456, -507, -525, 104210-538, -541 Lester: 11156, 11183, 11237, 11250, 11476, 11647, 11787, 14021 Ref: W015-91, AJ-13151 Note: Late Type	For: Toyota DIM: 114.5mm OD Replaces: OE: 104210-802 Lester: 23317 Ref: Note: Late Type, Europe 85Amp Type use

46-SRE Cover



46-82205
SRE Cover

For: GM
DIM: 128mm OD
Replaces:
OE: 104210-319, -326, -332, -435, -443
Lester: 11038, 11044, 11046, 11248
Ref: W015-78, AJ-13127
Note: Late Type



46-82206
SRE Cover

For: Land Rover
DIM: 128mm OD
Replaces:
OE: 104210-371, 104210-3921(Late)
Lester: 12660 (Late), 24028
Ref: 46-82192
Note: Late Type, Europe



46-82207
SRE Cover

For: Chrysler
DIM: 128mm OD
Replaces:
OE: 421000-080, -015, -025, -026, -033, 421000-034, -037, -062, -063, -065, 421000-075
Lester: 11040*, 11112, 11113, 11244*, 11382, 11383*, 11401, 11572, 11574
Ref: W015-75
Note: Late Type, *11040, 11244, 11383 Early Type use 46-82165.



46-82210
SRE Cover

For: Chrysler, Dodge, Ram
DIM: 137.5mm OD
Replaces:
OE: 421000-700, -701 021080-1540
Lester: 11379, 11380
Ref: W015-99, AZ-13119
Note: Late Type



46-82211
SRE Cover

For: Chrysler, Dodge
DIM: 128mm OD
Replaces:
OE: 421000-018
Lester: 11048
Ref:
Note: Early Type



46-82213
SRE Cover

For: Chrysler, Dodge
DIM: 137.5mm OD
Replaces:
OE: 104211-012, 104210-610
Lester: 11781, 11290
Ref: AE-1331
Note: Late Type



46-82216
SRE Cover

For:
DIM: 128mm OD
Replaces:
OE:
Lester:
Ref:
Note: Late Type

46-SRE Cover

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY Stator Slip Ring Rotor Rectifier and Diode Regulator Terminal Block Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	 46-82218 SRE Cover For: Acura, Honda DIM: 128mm OD Replaces: OE: 104210-591, 104210-592 Lester: 11391, 11392, 11573, 11600, 11670, 11671, 11672, 11773, 11774, 11775 Ref: W015-97, AH-13134 Note: Late Type	 46-82222 SRE Cover For: Ford DIM: 138mm OD Replaces: OE: 104210-627, -634, -677 Lester: 11532, 11627, 11629, 11645, 11679, 11763, 11867, 44000, 44011, 8913 Ref: AE-1370 Note: Late Type	 46-82225 SRE Cover For: Ford DIM: 128mm OD Replaces: OE: 104210-543 Lester: 11291 Ref: Note: Late Type Big case use 46-82213.
	 46-82219 SRE Cover For: Ford, Lincoln DIM: 128mm OD Replaces: OE: 104210-321, -416 Lester: 11000 Ref: AE-1323 Note: Late Type	 46-82223 SRE Cover For: Ford DIM: 128mm OD Replaces: OE: 104210-310, -350*, -429, -430 Lester: 11030*, 11099, 11150 Ref: Note: Late Type *11030 has two type SRE Cover. please see 46-82224 B+ open 22.1mm	 46-82226 SRE Cover For: Ford DIM: 128mm OD Replaces: OE: Lester: Ref: Note: Late Type Dupliacte 46-82194
	 46-82220 SRE Cover For: Ford, Lincoln, John Deere DIM: 128mm OD Replaces: 021551-356 OE: 104210-309, -393 Lester: 11387, 13918, 11524, 11525, 11594 Ref: W015-57, AH-13107 Note: Early Type	 46-82224 SRE Cover For: Ford DIM: 128mm OD Replaces: OE: 104210-448*, 104210-469 Lester: 11030*, 11151 Ref: Note: Late Type *11030 has two type SRE Cover. please see 46-82223	 46-82227 SRE Cover For: DIM: 128mm OD Replaces: OE: Lester: 11368, 11428, 11433, 11526 Ref: W115-110 Note: Late Type

46-SRE Cover



46-82228
SRE Cover

For:
DIM: 128mm OD
Replaces:
OE: 104210-320, -4150, -4910
Lester: 13978
Ref: AE-1322
Note: Late Type




46-82229
SRE Cover

For: European Hyundai, Kia
DIM: 128mm OD
Replaces:
OE: 104210-391, 104210-486, -581
Lester: 11387, 11766, 23971, 11479, 11524, 11591*, 11686*, 11766, 20997
Ref: AN-13122
Note: Late Type
46-82229 Regulator Hole Hight is 42.7mm.
Similar to 46-82241, but 46-82241 Hole Hight is 37mm.



46-82230
SRE Cover

For:
DIM: 114.5mm OD
Replaces:
OE:
Lester:
Ref:
Note: Late Type
85Amp Type use

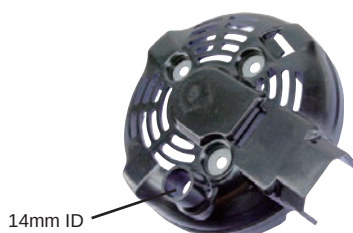

46-82231
SRE Cover

For: Buick, Cadillac, Chevrolet, Pontiac
DIM: 128mm OD
Replaces:
OE: 104210-200, -422, -436, -437, -539, 104210-540, -599
Lester: 11178, 11179, 11180, 11369, 11508, 11513
Ref: W015-80
Note: Late Type
B+ Insulator Height 15mm



46-82235
SRE Cover

For: Jeep
DIM: 128mm OD
Replaces:
OE: 421000-036, -055, -066
Lester: 11155, 11241
Ref: AZ-13105
Note: Late Type



46-82236
SRE Cover

For: Ford
DIM: 137.5mm OD
Replaces:
OE: 104210-618, -634, -667
Lester: 11328, 11406, 11434, 11534, 11549, 11630, 11620, 11621, 11624, 11641, 11667, 11751, 11791
Ref: AE-1365
Note: Late Type

Photo
Coming Soon

46-82237
SRE Cover

For: Jeep
DIM: 128mm OD
Replaces:
OE: 104210-424
Lester: 11114
Ref: W015-89, AZ-1398
Note: Late Type



46-82238
SRE Cover

For: Jeep
DIM: 137.5mm OD
Replaces:
OE: 421000-702, -703, -704, -705, -708
Lester: 11575, 11576, 11592, 11598
Ref: W015-89, AZ-1398
Note: Late Type



46-82239
SRE Cover

For:
DIM: 138mm OD
Replaces:
OE: 104210-644
Lester: 11790
Ref:
Note: Late Type

46-SRE Cover



46-82240
SRE Cover

For:
DIM: 138mm OD
Replaces:
OE:
Lester: 24111
Ref:
Note: Late Type



46-82243
SRE Cover

For: BMW
DIM: 138mmOD
Replaces:
OE: 104210-607
Lester: 11712, 11496
Ref: 46-82581
Note:



46-82248
SRE Cover

For: Ford
DIM: 138 mmOD
Replaces:
OE: 104210-6810, 104210-6900
Lester: 44009, 44014
Ref:
Note:



46-82241
SRE Cover

For: Hyundai, Kia
DIM: 128mmOD
Replaces:
OE: 104210-2870
Lester: 11591, 11686
Ref: AN-13148
Note: Late Type
46-82241 Regulator Hole Hight is 37mm.
Similar to 46-82229, but 46-82229 Hole Hight is 42.7mm.



46-82244
SRE Cover

For: Chevy & GMC Truck
DIM: 138mmOD
Replaces:
OE: 104210-687
Lester: 14009, 14019, 14020
Ref:
Note:



46-82249
SRE Cover

For: Ram, Ram Truck
DIM: 138mm OD
Replaces:
OE: 421000-7120, MX421000-7120, 421000-7130
Lester: 11749, 11792, 11793, 14027, 21090
Ref:
Note:



46-82242
SRE Cover

For: Ford
DIM: 138mm OD
Replaces:
OE: 104210-671, 104211-095
Lester: 11763
Ref: 290-5687, 290-5718
Note:

Photo
Coming Soon

46-82245
SRE Cover

For: Saturn
DIM: 128mmOD
Replaces:
OE: 104210-377, -431
Lester: 11062, 11030, 11099, 11150, 11151
Ref:
Note: Late Type
Similar to 46-82223, but 46-82245 with mountin hole



46-82250
SRE Cover, 215AMP

For: Ford, Alfa Romeo
DIM: 138mm OD
Replaces:
OE: 104210-6830, 104211-0270, 0690, 0760, 0761, 104210-6920, 6921
Lester: 11667, 11943, 44004, 44005
Ref:
Note:

46-SRE Cover



46-82251
SRE Cover

For:
DIM: 138mm OD
Replaces:
OE:
Lester:
Ref:
Note:



46-82261
SRE Cover

For: Chrysler, Fiat
DIM:
Replaces:
OE: 104210-1750, 1042101750,
104211-8000
Lester: 11585, 11594, 11796
Ref:
Note:



46-82264
SRE Cover

For: KIA
DIM: 138 mmOD
Replaces:
OE: 104210-6201
Lester: 11353, 11523
Ref:
Note:



46-82257
SRE Cover, 150AMP

For: BMW, Ford
DIM: 128.5mm OD
Replaces:
OE: 104210-2330, 2910, 2911, 6690,
104211-8181, 8182
Lester: 11636, 11666, 44021
Ref:
Note:



46-82262
SRE Cover

For: GM
DIM: 138mm OD
Replaces:
OE: 104210-2250
Lester: 11367
Ref:
Note:



46-82265
SRE Cover, 200AMP

For: Ford
DIM: 138mm OD
Replaces:
OE: 104210-6411, 104210-6561,
104211-0021, 104211-0310
Lester: 11664, 11665, 11616
Ref:
Note:



46-82260
SRE Cover, 150AMP

For: Ford
DIM: 137.5mm OD
Replaces:
OE: 104211-3320, 104211-3330,
104211-8850
Lester: 11782, 20501, 20502
Ref:
Note:



46-82263
SRE Cover, 140AMP

For: Buick
DIM: 128mm OD
Replaces:
OE: 104210-4360
Lester: 11180
Ref:
Note:



46-82266
SRE Cover, 130-150AMP

For:
DIM: 128mm OD
Replaces:
OE: 104210-1960, 104210-1961,
104210-1962, 104210-1900,
104210-1901, 104211-817
Lester: 11681, 11682, 11780,
11795, 14883
Ref: Late Type
Note:

46-SRE Cover



46-82267
SRE Cover

For: BMW
DIM: 138 mmOD
Replaces:
OE: 104210-6010, 104210-6770, 104210-6771
Lester: 11251, 11645
Ref:
Note: HAIR PIN



46-82270
SRE Cover, 105AMP

For:
DIM: 117.5mm OD
Replaces:
OE: 101210-1650
Lester: 11599
Ref:
Note:



46-82274
SRE Cover, 130AMP

For: Saab, Opel, Cadillac, Vauxhall
DIM: 125.7mm OD
Replaces:
OE: 101210-0160, 101210-0161, 101210-0162, 102211-8650, 102211-8660, 102211-8661
Lester: 23807, 23808, 24006
Ref: 46-824122
Note:



46-82268
SRE Cover

For: GM
DIM: 128mm OD
Replaces:
OE: 104211-9110, 104211-8340, 104211-8350
Lester: 14007, 11785
Ref:
Note:



46-82272
SRE Cover, 180AMP

For: Land Rover
DIM: 138 mmOD
Replaces:
OE: 104210-6420, 104210-6990, 104210-6991
Lester: 11762, 14016
Ref:
Note:



46-82275
SRE Cover, 135AMP

For: Ford
DIM: 128mm OD
Replaces:
OE: 104210-2920, 104210-2940, 104210-2941, 104210-2942, 104210-2950, 104211-1450
Lester: 11625, 11626, 11628, 11759
Ref: 188-52039
Note:



46-82269
SRE Cover, 70AMP

For: Alfa Romeo, Fiat
DIM:
Replaces:
OE: 102211-8280
Lester: 24062
Ref:
Note:

**Photo
Coming Soon**

46-82273
SRE Cover, 130AMP

For: Jaguar
DIM: 128.5 mmOD
Replaces:
OE: 104210-5050
Lester: 11512
Ref:
Note:



46-82276
SRE Cover, 150AMP

For: Land Rover
DIM: 128mm OD
Replaces:
OE: 104210-1470, 104210-5360, 104210-5361 DAN1103
Lester: 11509, 11530, 11588, 11985
Ref:
Note:

46-SRE Cover

Photo
Coming Soon

46-82277 SRE Cover, 100AMP

For: Toyota
DIM: 123.2mm OD
Replaces:
OE: 104211-3770
Lester: 21017
Ref:
Note:

Photo
Coming Soon

46-82278 SRE Cover, 145AMP

For: Buick, Cadillac, Chevrolet, GMC
DIM:
Replaces:
OE: 104210-1960, -1961, -1962
Lester: 11681, 11682, 11780, 11795, 14883(old)
Ref:
Note: Looks like all the data duplicate to 46-82266, will use 46-82266.



46-82279 SRE Cover, 170AMP

For: Cadillac
DIM: 138mm OD
Replaces:
OE: 104211-0210, 104211-0351, 104211-0670, 104211-0671
Lester: 11974, 11780
Ref: AJ-13201
Note:



46-82280 SRE Cover, 150AMP

For: Ford
DIM: 128mm OD
Replaces:
OE: 104210-3700, 104210-3701, 104210-4090, 104210-4091
Lester: 11205, 11238
Ref:
Note:



46-82281 SRE Cover, 125AMP

For: Toyota
DIM: 124 mmOD
OE: 104211-3310, 3311, 3312, 3290, 104211-3291, 3293, 3301, 3303, 104211-3531, 3541, 4510
Lester: 11776, 11777, 11778, 14486, 14487, 21120
Ref:
Note:



46-82282 SRE Cover, 135AMP

For: Acura, Honda
DIM: 128.5 mmOD
OE: 104210-1890, 104210-1990, 104211-8270, 104211-8300, 104211-8520
Lester: 11670, 11671, 11672, 11773, 11774
Ref:
Note:



46-82283 SRE Cover

For:
DIM: 138 mmOD
Replaces:
OE: 104211-0621
Lester: 44014
Ref: AE-13101
Note:



46-82284 SRE Cover, 150AMP

For: Hyundai, Kia
DIM: 128.5 mmOD
Replaces:
OE: 104211-8790
Lester: 11953
Ref: AN-13100
Note:



46-82285 SRE Cover, 150AMP

For: Cadillac, Saab
DIM: 138 mmOD
Replaces:
OE: 104210-2170
Lester: 11499, 11507
Ref:
Note:

46-SRE Cover

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY Stator Slip Ring Rotor Rectifier and Diode Regulator Block Terminal Brush Holder and Parts Insulator SRE COVER Misc. Parts B+ Term. Post & Nut Hardware	 46-82286 SRE Cover For: Honda DIM: 120 mmOD Replaces: OE: 104210-1540 104211-3470, -3910, -396 Lester: 11930, 11931 21154 Ref: AH-13151 Note:	 46-82289 SRE Cover For: Audi DIM: 128.5mm OD Replaces: OE: 104211-8690, 104211-8691, 104211-8692 Lester: 21604 Ref: AN-13172 Note:	 46-82293 SRE Cover, 135AMP For: Honda DIM: 120 mmOD Replaces: OE: 104211-3710 Lester: 21237 Ref: AH-13155 Note:
	 46-82287 SRE Cover, 140AMP For: DIM: 125mm OD Replaces: OE: 104211-8380 Lester: 11887, 11983, 14016, 21371, 21703 Ref: AN-13186 Note:	 46-82290 SRE Cover, 130AMP For: Toyota DIM: 128.5mm OD Replaces: OE: 104211-3761 Lester: 21247 Ref: Note:	Photo Coming Soon
	 46-82288 SRE Cover, 220AMP For: Land Rover DIM: 138 mmOD Replaces: OE: 104210-6480, -6481, -6482 -6483 Lester: 11887, 11983, 14016, 21032 Ref: AN-13172, AN-13186 Note:	 46-82291 SRE Cover, 160AMP For: Alfa Rome, Jeep DIM: 128.5 mmOD Replaces: OE: 104211-8660, DAN1146 Lester: 21184 Ref: Note:	 46-82297 SRE Cover, 130AMP For: Hino DIM: Replaces: OE: 104210-1912, 104210-2860, 104210-2863, 104210-2864, 104210-8462, 104211-8810 Lester: 11514, 11767 Ref: AT-13275 Note:

46-SRE Cover

**Photo
Coming Soon**

46-82300 SRE Cover

For: Genesis
DIM: 138 mmOD
Replaces:
OE: 104211-0580, 37300-3F030
Lester: 21363
Ref:
Note: HAIR PIN





46-82301 SRE Cover

For:
DIM: 120mm OD
Replaces:
OE: 104210-1200, 104210-1201,
104210-1202, 104210-1203,
104211-8530, 104211-8531
DAN1123
Lester: 24126
Ref:
Note: HAIR PIN

Hardware	B+ Term. Post & Nut	Misc. Parts	SRE COVER	Insulator	Brush Holder and Parts	Regulator ,Terminal Block	Diode	Rectifier and Parts	Rotor	Slip Ring	Stator	Solid PULLEY	Cap & Tool for Clutch Pulley	CLUTCH PULLEY	SRE	DE
----------	------------------------	-------------	--------------	-----------	------------------------------	---------------------------------	-------	------------------------	-------	-----------	--------	-----------------	------------------------------------	------------------	-----	----

10-Bearing & 46-Bearing Retainer Parts

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY	 10-304240 Bearing-DE Housing DIM: 17mm ID x 52mm OD x 16mm W Replaces: 949100-3330, -4370, -5010 Ref: #333 Note:	 46-82003 Bearing Retainer-DE Housing DIM: 34mm ID, 53mm OD M4 Mounting Hole Replaces: 02141-0450 Ref: 46-82502, AT-1755 Note: Use with screw 84-82008	 46-82200 Bearing Retainer-SRE Housing DIM: 35mm ID, 14.5mm Height 64mm Mounting Length Note: Use 6202 Bearing Used w/ 22-82096, 22-82102, 22-82103, 22-82118, 22-82123, 22-82124
Stator Slip Ring Rotor Rectifier and Diode Regulator Terminal Block Brush Holder and Parts Insulator SRE COVER	 10-202140S (NSK) Bearing-SRE Housing DIM: 15mm ID x 35mm OD x 13mm W Replaces: 949100-2790, -3980, -4440, 949100-5360 Ref: #279, 10-2021-4 Note: 10-202140K Koyo Brand 10-202140T NTN Brand	 46-82008 Bearing Retainer-DE Housing DIM: 37mm ID x 58mm W x 58mm L Lester: Note: #382 Bearing	 46-82208 Bearing Retainer-DE Housing DIM: 37mm ID x 58mm W x 58mm L Lester: 11063, 12660 (Early), 13871, 13918, 13984, 13988 Note: use #382 Bearing Used w/ 22-82084, 22-82085, 22-82086, 22-82087, 22-82088, 22-82089, 22-82093, 22-82094, 22-82095, 22-82098, 22-82099, 22-82101, 22-82102, 22-82106A, 22-82108, 22-82109, 22-82112, 22-82113, 22-82114, 22-82117, 22-82118, 22-82119, 22-82120
Misc. Parts B+ Term. Post & Nut Hardware	 6-30340K (Koyo) Bearing-DE Housing DIM: 17mm ID x 47mm OD x 14mm W Replaces: 949100-2790, -3980, -4440, 949100-5360 Ref: #6303, 6-303-4 Note:	 46-82039 Bearing Retainer-DE Housing DIM: 37mm ID, 61.5mm OD M4 Mounting Hole Replaces: 021411-0570, 021411-0640 Ref: 46-82500 Note: Use with screw 84-82008	

46-Bearing Retainer



46-82023

Gasket-SRE Bearing Retainer

DIM: 40mm ID, 46mm OD
1.5mm Thickness

Replaces:

Ref: 46-82100

Note: Used w/46-82200 Bearing Retainer



46-82099

Wave Washer-SRE Bearing

DIM: 24.5mm ID, 35.2mm OD x 1mm T



Replaces: 021542-0120, 021542-0160

Ref: 46-82802

Note: This is close type design, but the function is the same as open type.

Hardware	B+ Term. Post & Nut	Misc. Pars	SRE COVER	Insulator	Brush Holder and Parts	Regulator Terminal Block	Diode	Rectifier and Parts	Rotor	Slip Ring	Stator	Solid PULLEY	Cap & Tool for Clutch Pulley	CLUTCH PULLEY	SRE	DE
----------	---------------------	------------	-----------	-----------	------------------------	--------------------------	-------	---------------------	-------	-----------	--------	--------------	------------------------------	---------------	-----	----

46-Misc. Parts

DE SRE CLUTCH PULLEY Cap & Tool for Clutch Pulley Solid PULLEY	Stator Slip Ring Rotor Rectifier and Diode Regulator , Terminal Block Brush Holder and Parts Insulator COVER Misc. Parts B+ Term. Post & Nut Hardware	
 46-82005 Cover-SRE Bearing (External) DIM: 15mm ID x 22mm OD x 2.2mm T Replaces: Ref: 46-82700 Note:	 4604-8023 Bushing- SRE Housing w/Split Open DIM: 11.5mm ID x 18.3mm OD 17.7mm OAL Replaces: Lester: 13983 Note: used on 22-82085	 4604-8026 Bushing- SRE Housing Hex Head DIM: M10 x 1.5, 18.3mm OD 22.85mm OAL 19mm Hex Head Replaces: Lester: 11034, 11088 Note: used on 22-82088
 46-82006 Cover-SRE Bearing (External) DIM: 15.4mm ID x 26mm OD x 0.25mm T Replaces: Ref: Note:	 4604-8024 Bushing- SRE Housing DIM: M10 x 1.5, 18mm OD 19mm OAL 18.9mm Hex Head Replaces: OE: 42100-014, -030, -700 Lester: 11063, 11379 Note: used on 22-82095, 22-82102	 4604-8027 Bushing- SRE Housing DIM: M10 x 1.5, 18mm OD 23mm OAL 19mm Hex Head Replaces: OE: Lester: 13927 Note: used on 22-82094, 22-82101, 22-82110, 22-82112
	 4604-8025 Bushing- SRE Housing w/Split Open DIM: 10mm ID, 18.35mm OD 17.7mm OAL 26mm Round Head Replaces: OE: Lester: 13918 Note: used on 22-82093	 4604-8028 Bushing- SRE Housing DIM: 10.8mmID, 14.2mmOD 17mmOAL Replaces: OE: Lester: Note:

46-Misc. Parts



4604-8031

Bushing- DE Housing

DIM: 11.5mmID* 20.7mmOD

Replaces:

OE:

Lester:

Note: Motorola



4604-8032

Bushing- DE Housing

DIM: 8.5mm ID, 15mm L

Replaces:

OE:

Lester:

Note: Motorola



46-82247

Tolerance Ring - SRE Bearing

For: Denso Hair Pin Alternators

Used on: Toyota

DIM: 35IDx36.8ODx14H

Replaces:

OE: 104211-3290, 104211-3291, 104211-3293, 104211-3541

Lester: 14486, 14487

Ref: AT-13366A

Note: 6202 bearing use



4604-8029

Adaptor Extension-SRE Housing

DIM: 10.2mmID, 19.2mmOD

51.4mmOAL

Replaces:

OE:

Lester:

Note: Motorola

**Photo
Coming Soon**

4604-8030

Adaptor Extension

DIM: 10.2mmID, 19.2mmOD

76mmOAL

Replaces:

OE:

Lester:

Note: Motorola



46-82294

Bracket - Wire

For: Denso Hair Pin Alternators

Used on: Acura, Honda

Replaces:

OE: 104210-3290, 3291, 3292, 3293, 104210-4730, 4731, 4732, 104210-5160, 5890

Lester: 13980, 11154, 11390

Note: Used with 46-82169 or 46-82191.



46-82246

Heat Shield

For: Denso Hair Pin Alternators

Used on: Lexus, Toyota

DIM: 128.5mm type use

Replaces:

OE: 104210-346

Lester: 11087

Ref: AT-13298A

Note:



46-82271

Heat Shield

For: Denso Hair Pin Alternators

Used on: Acura, Honda

DIM:


Replaces:

OE: 104210-3290, 104210-3291, 104210-3292, 104210-3293, 104210-4730, 104210-4731, 104210-4732, 104210-5160, 104210-5890

Lester: 13980, 11154, 11390

Ref:

84-B+ Terminal Post (M6)

DE	 Terminal side Post (Side Post Type)		
SRE		84-82050 Terminal Post- Rectifier Round Head- Top Post DIM: M6 x 1.0 x 33.2mm L 35mm OAL Lester: 13980, 23317 Ref: W115-177 Note: Used with Rectifier: 31-82043 (INR429) Nut: 85-82028	84-82052 Terminal Post- Rectifier Round Head- Top Post DIM: M6 x 1.0 x 39.7mm L 42.9mm OAL Lester: 11003, 11035, 11036, 11037, 11046, 11180, 13919, 13980 Ref: W115-178 Note: Used with Rectifier: 31-82050 (INR422) Nut: 85-82029 31-82042 (INR425)
CLUTCH	 Terminal top Post (Top Post Type)		
PULLEY		84-82051 Terminal Post- Rectifier Square Head- Side Post DIM: M6 x 1.0 x 33.7mm L 36.3mm OAL Lester: 11032, 11033, 11034, 11084, 11087, 11088, 11136, 11137, 11138, 11139, 11153, 11195, 11385, 11431, 11776, 13984, 13994 Ref: W115-175 Note: Used with Rectifier: 31-82045 (INR430), 31-82052 (INR426) Nut: 85-82027	84-82069 Terminal Post- Rectifier Round Head- Top Post DIM: M6 x 1.0 x 28.25mm L 37.75mm OAL Lester: Ref: Note:
Cap & Tool			
Pulley for Clutch			
Solid			
Stator			
Slip Ring			
Rotor			
Rectifier and Parts			
Diode			
Regulator, Terminal Block			
Brush Holder and Parts			
Insulator			
SRE			
COVER			
Misc. Parts			
B+ Term. Post & Nut			
Hardware			

84-B+ Terminal Post (M8)



84-82053

**Terminal Post- Rectifier
Square Head- Side Post**

DIM: M8 x 1.25 x 35mm L
38mm OAL

Lester:

Ref:

Note:



84-82055

**Terminal Post- Rectifier
Round Head- Top Post**

DIM: M8 x 1.25 x 43.9mm L
47mm OAL

Lester:

Ref:

Note:



84-82054

**Terminal Post- Rectifier
Square Head- Side Post**

DIM: M8 x 1.25 x 41mm L
44.2mm OAL

Lester: 11063, 11110, 11114, 11240,
11243, 11276, 11285, 11294,
11295, 11296, 11297, 11298

Ref: W115-176, AZ-1879A

Note: Used with
Rectifier: 31-82038 (INR421)
Nut: 85-82026



84-82056

**Terminal Post- Rectifier
Round Head- Top Post**

DIM: M8 x 1.25 x 45.9mm L
49mm OAL

Lester: 11039, 11040, 11048, 11112,
11113, 11156, 11179, 11244,
11369, 11383, 11508, 11513,
11572, 13867, 13914, 13915,
13918

Ref: W115-179

Note: Used with
Rectifier: 31-82048 (INR432),
31-82049 (INR420), 31-82051
(INR424)
Nut: 85-82034

85-Rectifier Nut (M6)

DE	SRE	CLUTCH PULLEY	Cap & Tool for Clutch Pulley	Solid PULLEY	Stator	Slip Ring	Rotor	Rectifier and Parts	Diode	Regulator , Terminal Block	Brush Holder and Parts	Insulator	SRE COVER	Misc. Parts	B+ Term. Post & Nut	Hardware
																
																
																
					85-82025 Nut-Rectifier M6 B+ Terminal DIM: M6 x 1.0 x 17.75mm L 13.7mm OD Lester: Ref: Note:						85-82028 Nut-Rectifier M6 B+ Terminal DIM: M6 x 1.0 x 18.65mm L 11.6mm OD Lester: 11238, 11776, 13980, 23317 Ref: W115-181 Note: Used with Rectifier:31-82043 (INR429), Post: 84-82050					
																
					85-82025-1 Nut-Rectifier M6 B+ Terminal DIM: M6 x 1.0 x 15mm L 13.7mm OD Lester: Ref: Note: Can be use as SRE Stud Extension						85-82029 Nut-Rectifier M6 B+ Terminal DIM: M6 x 1.0 x 11.50mm L 12.9mm OD Lester: 11003, 11035, 11036, 11037, 11046, 11180, 13919 Ref: W115-182 Note: Used with Rectifier:31-82042 (INR425), 31-82050 (INR422) Post: 84-82052					
																
					85-82027 Nut-Rectifier M6 B+ Terminal DIM: M6 x 1.0 x 17.65mm L 11.8mm OD Lester: 11032, 11033, 11034, 11084, 11087, 11088, 11136, 11137, 11138, 11139, 11153, 11195, 11385, 11386, 11431, 13994. Ref: W115-180 Note: Used with Rectifier:31-82045 (INR430), Post: 84-82051											

85-Rectifier Nut (M8)



85-82026
Nut-Rectifier
M8 B+ Terminal

DIM: M8 x 1.25 x 17.6mm L
13.7mmOD

Replaces:

OE: 421000-081

Lester: 11063, 11110, 11240, 11243,
11276, 11294, 11295, 11296,
11297, 11298, 11378, 13868

Ref: W115-183

Note: Used with
Rectifier:31-82038 (INR421),
Post: 84-82054



85-82030
Nut-Rectifier
M8 B+ Terminal

DIM: M8 x 1.25 x 25.05mm L
13.65mmOD

Replaces:

OE:

Lester: 11156, 11179, 11508, 11513,
13918

Ref: W115-185

Note: Used with
Rectifier: 31-82058 (INR436),
Post:



85-82033
Nut-Rectifier
M8 B+ Terminal

DIM: M8 x 1.25 x 16.50mm L
16.5mmOD

Replaces:

OE: 104210-613

Lester: 11326

Ref:

Note: Used with
Rectifier:31-82040 (INR440),
Post:

Photo
Coming Soon

85-82034
Nut-Rectifier
M8 B+ Terminal

DIM: M8 x 1.25 x 21mm L
13.65mmOD, 14mm Hex

Replaces:

OE: 421000-003, -005, -008, -011, -012,
421000-015, -018, -019, -075

Lester: 11039, 11040, 11048, 11112,
11113, 11244, 11383, 11572,
13867, 13914, 13915, 13923

Ref: W115-184

Note: Used with
Rectifier:31-82048 (INR432),
31-82049 (INR420),
31-82051 (INR424)
Post:



85-82035
Nut-Rectifier
M8 B+ Terminal

DIM: M8 x 1.25 x 10.5mm L
15.55mmOD

Replaces:

OE: 421000-003, -005, -008, -011, -012,
421000-015, -018, -019, -075

Lester: 11054, 11093, 20215, 20215,
23820, 23821, 23913, 24047,
24070, 24086

Ref:

Note: Used with
Rectifier:31-82059 (INR437),
Post:

Photo
Coming Soon

85-82137
Adapt - Rectifier
M8 B+ Terminal

DIM: M8 x 1.25 x 25mm L
16mmOD
17mm Hex

Replaces:

OE:

Lester:

Ref:

Note: Custom made

84-Hardware

DE	SRE	CLUTCH PULLEY	Cap & Tool for Clutch Pulley	Solid PULLEY	Stator	Slip Ring	Rotor	Rectifier and Parts	Diode	Regulator , Terminal Block	Brush Holder and Parts	Insulator	SRE COVER	Misc. Parts	B+ Term. Post & Nut	Hardware

84-Hardware



84-82068

**Screw-SRE Cover
Hex Washer Head**

DIM: M5 x 0.8 x 28mm L
32.5mm OAL

OE: 104210-330

Lester: 11776

Ref:

Note:



84-82070

**Screw-Rectifier
Philips Pan Head
w/Split lock washer, Flat washer**

DIM: M4 x 0.7 x 14mm L
17mm OAL

Ref: MS-4014W

Note:



84-82071

**Thru Bolte- DE to SRE Housing
Hex Washer Head**

For: Denso Hair Pin 180-225 Amp

DIM: M6 x 1.0 x 90mm L,
22mm Thread Length, 95mm OAL

Ref: AE-1290F

Note: This is for 138mm Case OD use.



84-82117-D

**Screw-Brush Holder
Philips Pan Head
w/Split Lock Washer**

DIM: M4 x 0.7 x 10mm L

Ref:

Note:

85-Hardware



85-82002
Flange Nut
w/Serrated Flange
Yellow Zinc

DIM: M6 x 1.0 x 5.8mm Thick
Note: Used on SRE Cover and B+ Output Terminal.
Similar to Metro# 85-82002F, except 85-82002F with Unserrated Flange



85-82003
Hex Nut
w/Serrated Flange
Yellow Zinc

DIM: M5 x 0.8 x 4.9mm Thick
Note: Used on SRE Cover.
Similar to Metro# 85-82003F, except 85-82003F with Unserrated Flange



85-82012
Flange Nut
w/Serrated Flange
Yellow Zinc

DIM: M8 x 1.25 x 7.8mm Thick
Note: Similar to Metro# 85-82012F, except 85-82012F with Unserrated Flange
Zinc Plated please use Metro# 84-82012-1



85-82002F
Flange Nut
w/Unserrated Flange
Yellow Zinc

DIM: M6 x 1.0 x 5.8mm Thick
Note: Used on SRE Cover and B+ Output Terminal.
Similar to Metro# 85-82002, except 85-82002 with Serrated Flange



85-82003F
Flange Nut
w/Unserrated Flange
Yellow Zinc

DIM: M5 x 0.8 x 4.9mm Thick
Note: Used on SRE Cover.
Similar to Metro# 85-82003, except 85-82003 with Serrated Flange



85-82012-1
Flange Nut
w/Serrated Flange
Zinc Plated

DIM: M8 x 1.25 x 7.8mm Thick
Note: Similar to Metro# 85-82012F, except 85-82012F with Unserrated Flange



85-82012F
Flange Nut
w/Unserrated Flange
Yellow Zinc

DIM: M8 x 1.25 x 7mm Thick
Note: Similar to Metro# 85-82012, except 85-82012 with Serrated Flange
Zinc Plated please use Metro# 84-82012F-1

85-Hardware

 85-82032 Flange Nut w/Unserrated Flange Zinc plated DIM: M16 x 1.50 x 10mm Thick Note: Pulley Nut	 85-82001F-1 Flange Nut w/Unserrated Flange Zinc plated DIM: M14 x 1.50 x 10.2mm Thick Note: Pulley Nut	
 85-82013 Flange Nut w/Serrated Flange Zinc plated DIM: M16 x 1.50 x 10.8mm Thick Note: Pulley Nut	 85-82001F-CCW Flange Nut w/Unserrated Flange Zinc plated DIM: M14 x 1.50 x 10.2mm Thick OE: 421000-081 Lester: 11584 Note: CCW Pulley Nut	

Hardware	B+ Term. Post & Nut	Misc. Pars	SRE COVER	Insulator	Brush Holder and Parts	Regulator Terminal Block	Diode	Rectifier and Parts	Rotor	Slip Ring	Stator	Solid PULLEY	Cap & Tool for Clutch Pulley	CLUTCH PULLEY	SRE	DE

Performance Parts



HP21-82501
DE Housing
10SI, 138mm Stator OD
Used on:
Replace: Delco AD244
Lester: 8292
Ref:
Note: 10mm Mtg. Hole



HP21-82508A
DE Housing
10SI, 128.5mm Stator OD
Used on:
Replace: Delco 10SI
Lester: 8292
Ref: 5/16-18 Thread



HP21-82509A
DE Housing
128.5mm Stator OD
Used on: Ford 1G, 2G, 6G
Lester: 7058, 7067, 7076, 7078, 7706, 7716, 7735, 7738
Ref: Cenetr Distance 89mm
Note: 3/8-16"



HP21-82511
DE Housing
10SI, 138mm Stator OD
Used on: Corvette
Replace: Valeo
Lester: 13968, 13969, 11486, 11487, 11794
Ref:
Note: 11mm Mtg. Hole



HP21-82514
DE Housing
AD244, 138mm Stator OD
Used on: Corvette
Replace: 19050769
Lester: 8290, 8497
OE: 10464468, 10480285, 15062413, 19151920, 19244750
Ref:



HP21-82515
DE Housing
128.5mm Stator OD
Used on:
Replace: Delco CS130
Lester: 7861, 7921, 8165, 8189
Ref: use DE 21-1046



HP21-82512
DE Housing
CS144, 138mm Stator OD
Used on: Impala, Caprice
Replace: Delco CS144
OE: 10456319, 10463026, 10463027, 10463033, 10463063, 10463071, 10463081, 10463195...etc.
Lester: 7805-11, 7805-5, 7864-11, 7864-2, 7864-5, 8009-5, 8119-7, 7678-11, 7684-11...etc.

**Photo
Coming Soon**

HP21-82512A
DE Housing
CS144, 138mm Stator OD
Used on: Impala, Caprice
Lester: 7806-2, 7812-11, 7863-2, 7901-11, 7901-2, 7901-5, 7901-7, 7904-2, 7942-2, 7959-7, 7966-2...etc.
OE: 10456332, 10456336, 10463069, 10463070, 10463076, 10463096, 10463108, 10463153...etc.
Ref: w/ M10*1.5

Performance Parts



HP21-82516

DE Housing

128.5mm Stator OD

Used on: Denso Hair Pin Alternator

Replace: Motorola

Lester:

Ref:

Note: M8x1.25 Thread Three Mtg. Hole



HP21-82516A

DE Housing

128.5mm Stator OD

Used on: Denso Hair Pin Alternator

Replace: Motorola

Lester:

Ref: 5/16-18 Three Mtg. Hole



HP21-82519

DE Housing

138mm Stator OD


Used on:

OE: LR1100-734, LR1100-734C

Lester: 13939, 11163, 11119, 11163

Ref:

Note: Modify, replace to Hitachi alternator



HP21-82521

DE Housing

138mm Stator OD

Used on: FORD RANGER

Replace: Denso to Bosch 20035

OE: F000BL06BG

0-125-711-005, 0-125-711-046

0-125-711-134

Lester: 20035

Ref:



HP22-82502-BKT

Bracket - SRE Housing

138mm Stator OD

Used on:

OE: LR1100-734, LR1100-734C

Lester: 13939, 11163, 11119, 11163

Ref:

Note: to convert the SRE Housing for Hitachi alternator use.

Photo
Coming Soon

24-374Y

Pulley

4-Groove

Used on:

Replaces:

Size: 17mmID

45mmOD x 14mm W

7.25 to First Groove

Ref:



24-352

Pulley

6-Groove

Used on:

Replaces:

Size: 17mmID

45mOD x 21mm Belt

8 to First Groove

Ref:

Performance Parts



24-325
Pulley
7-Groove

Used on:
Replaces:

Size: 17mmID
45mmOD x 25mm Belt
8.02 to First Groove

Lester: 11034

Ref:



24-375
Pulley
8-Groove

Used on:
Replaces:

Size: 17mmID x 45mmOD
9.8 to First Groove

Lester: 11034

Ref:

Note: for 49mm OD, please use 24-351



27-82022H22

Stator


220 Amp, 128.5mm OD

Used on: Denso Hair Pin Alternator

Size:

Ref:

Note: 6-Lead, Delt-Y, 1 dot



27-82026H25

Stator

270-330 Amp, 128.5mm OD

Used on: Denso Hair Pin Alternator

Size: 120.1~120.2mmOD x
94.1~94.15mmID x 34mmTK

Ref:

Note: 6-Lead/2



27-82022H27

Stator

270-330 Amp, 128.5mm OD

Used on: Denso Hair Pin Alternator

Size:

Ref:

Note: 6-Lead, 2 dot



27-82024H32

Stator

320 Amp, 138mm OD

Used on: Denso Hair Pin Alternator

Replaces:

Size:

OE:

Lester:

Ref:

Note: 6-Lead, 2 dot



27-82033

Stator

200 Amp, 128.7mm OD

Used on: Denso Hair Pin Alternator

Replaces:

Size: 128.7mm OD x 103mm ID
34.5mmTH


OE:

Lester:

Ref:

Note: 6-Lead/6-dot
Use w/30-82036

Performance Parts

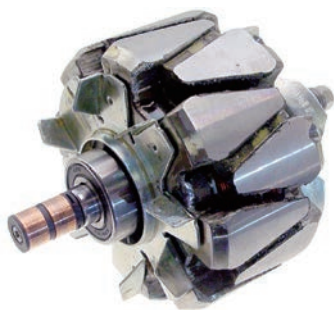


30-82018H37
Rotor
138mm OD Type
CW 200 Amp

Replaces:

Size: 109mm OD x 155mm OAL

Lester: 11290, 11434

Note: 1.7 ohm
W/ 8 Magnet

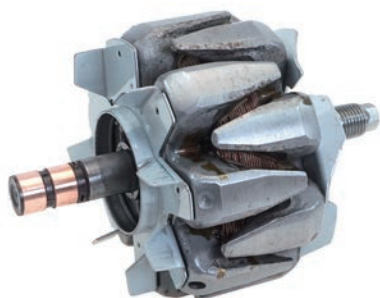

30-82036
Rotor
128.7 mm OD
200 Amp

Used on: Denso Hair Pin Alternator

Size: 102.4mm OD x 147mm OAL

Lester:

Note: 1.8Ω
Slip Ring 14mm OD
Use w/27-82033 Stator



31-82038HD
Rectifier
117 mm OD

M8x1.25 Side Post
270-300 Amp, 12-80A Diodes

Replaces: 021580-5891, 021580-5901

Lester: 11030, 11063, 11093, 11099,
11109, 11205, 11299, 11583,
13868, 13870, 13871, 13912,
13913, 13913CP, 13992

OE: 104210-3030, 104210-3031,
104210-3032, 104210-3100,
104210-3500, 104210-3700,
104210-3701, 104210-4050,
104210-4140, 104210-4410,
121000-2520, 421000-0011,
421000-0012, 421000-0013,
421000-0021, 421000-0022,
421000-0023, 421000-0024,
421000-0025, 421000-0026,
421000-0027, 421000-0028,
421000-0040, 421000-0041,
421000-0042, 421000-0043,
421000-0060, 421000-0061,
421000-0062, 421000-0100,
421000-0103, 421000-0230,
421000-0300, 421000-0301,
421000-0302, 421000-0303,
421000-0304, 421000-0492,
421000-0493, 421000-0513,
421000-0730, 421000-0731,

Ref: INR421

Note: Self-Exciting



31-82038HD-CP
Rectifier
117 mm OD

M8x1.25x34, Copper
270-300 Amp, 12-80A Diodes

Replaces: 021580-5891, 021580-5901


Lester: 11030, 11063, 11093, 11099,
11109, 11205, 11299, 11583,
13868, 13870, 13871, 13912,
13913, 13913CP, 13992

OE: 104210-3030, 104210-3031,
104210-3032, 104210-3100,
104210-3500, 104210-3700,
104210-3701, 104210-4050,
104210-4140, 104210-4410,
121000-2520, 421000-0011,
421000-0012, 421000-0013,
421000-0021, 421000-0022,
421000-0023, 421000-0024,
421000-0025, 421000-0026,
421000-0027, 421000-0028,
421000-0040, 421000-0041,
421000-0042, 421000-0043,
421000-0060, 421000-0061,
421000-0062, 421000-0100,
421000-0103, 421000-0230,
421000-0300, 421000-0301,
421000-0302, 421000-0303,
421000-0304, 421000-0492,
421000-0493, 421000-0513,
421000-0730, 421000-0731,

Ref: INR421, AZ-0795

Note: Copper heat sink
Self-Exciting

Performance Parts



31-82040HD

Rectifier
134 mm OD

M8x1.25 Batt. Term
180 Amp, 12-80A Diodes


Replaces:

Lester:

OE: 104210-6131

Ref: IINR440

Note: 12-90A Avalanche press fit diode

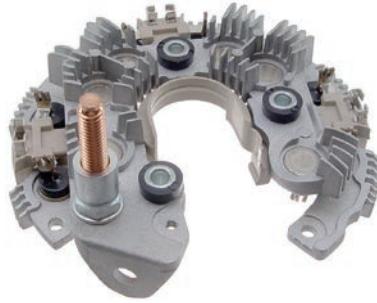

31-82046HD

Rectifier
134 mm OD

M8 x 1.25 x 46mm L B+ Post
320-370 Amp, 24-80A Diodes

Replaces:

Lester: 11181, 11252, 11290

OE: 104210-6000, 104210-6001,
104210-6100, 104210-6103,
104210-6110, 104210-6160

Ref: INR435

Note: Aluminum



35-82105-SE

Regulator
SENSE-FR-IL-NC

Used on: Buick, Cadillac, Pontiac

Replaces: 126600-0030, 126600-0031

OE: 104210-3060, 104210-3070,
104210-3300, 104210-4540

Lester: 11035, 11037SE, 13919

Ref: IN6003SE

Note: Self-Exciting



31-82040HD-CP

Rectifier
134 mm OD

M8x1.25x34 Bolt
320-370 Amp, 12-80A Diodes


Replaces:

Lester: 14009, 14020

OE: 104210-6860, 104210-6870

Ref: IINR440

Note: Copper Heat sink

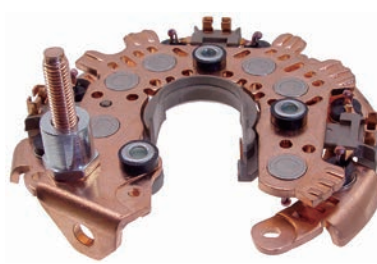

31-82046HD-CP

Rectifier
134 mm OD

M8x1.25 Bolt
320 Amp, 12-80A Diodes

Replaces:

Lester: 11645

OE: 104210-6770, 104210-6771

Ref:

Note: Copper Heat sink



35-82110-SE

Regulator
L(RC)- F(FR)

Used on: Buick, Cadillac, GMC, Pontiac
Saturn

Replaces: 126600-324, 126600-344

OE: 104210-3191, 104210-3320,
104210-4220, 104210-4330,
104210-4340, 104210-4350,
104210-4360, 104210-4370,
104210-4420, 104210-4430,
104210-5390, 104210-6000,
104210-6001, 104210-6110,
104210-6160

Lester: 11038, 11044, 11046, 11110,
11140, 11178, 11179, 11180,
11181, 11248, 11252, 11369,
11682, 11785, 11795, 14007,
14007, 14883

Ref: IN6324SE

Note: Self-Exciting

Lester No. to Housing NO. Index

Lester#	DE#	SRE#
8913	21-82143	22-82143
11000	21-82163	22-82163
11003	21-82116	22-82116
11030	21-82113	22-82113
11032	21-82089	22-82089
11033	21-82089	22-82089
11034	21-82088	22-82088
11035	21-82166	22-82166
11036	21-82166	22-82166
11037	21-82116	22-82137
11038	21-82125	22-82125
11039	21-82138	22-82138
11040	21-82134	22-82134
11044	21-82147	22-82147
11046	21-82147	22-82147
11048	21-82084	22-82084
11054	21-82106	22-82106A
11062	21-82113	22-82113
11063	21-82098	22-82095
11084	21-82088	22-82088
11087	21-82085	22-82145
11090	21-82085	22-82085
11093	21-82106	22-82106A
11099	21-82113	22-82113
11109	21-82128	22-82128
11110	21-82128	22-82128
11112	21-82103	22-82100
11113	21-82103	22-82100
11136	21-82104	22-82101
11137	21-82104	22-82101
11139	21-82086	22-82086
11140	21-82128	22-82128
11146	21-82135	22-82135
11150	21-82113	22-82113
11151	21-82113	22-82113
11153	21-82085	22-82085
11155	21-82123	22-82123
11156	21-82135	22-82135
11178	21-82136	22-82136
11179	21-82130	22-82130
11180	21-82166	22-82166
11181	21-82107	22-82107
11194	21-82121	22-82121
11195	21-82088	22-82088
11196	21-82110	22-82110
11197	21-82085	22-82158
11198	21-82085	22-82085
11201	21-82097	22-82088
11203	21-82165	22-82165
11204	21-82122	22-82117
11205	21-82108	22-82193
11206	21-82108	22-82193
11238	21-82159	22-82159
11240	21-82124	22-82124
11241	21-82123	22-82123
11243	21-82098	22-82095
11244	21-82134	22-82134
11248	21-82125	22-82125
11250	21-82144	22-82144
11251	21-82118	22-82118

Lester#	DE#	SRE#
11252	21-82118	22-82118
11273	21-82117	22-82137
11276	21-82124	22-82124
11286	21-82129	22-82129
11290	21-82115	22-82115
11291	21-82109	22-82109
11292	21-82122	22-82117
11293	21-82117	22-82117
11294	21-82098	22-82095
11295	21-82098	22-82095
11296	21-82145	22-82095
11297	21-82102	22-82099
11298	21-82102	22-82099
11299	21-82102	22-82099
11324	21-82086	22-82086
11325	21-82110	22-82110
11326	21-82104	22-82101
11328	21-82178	22-82178
11350	21-82126	22-82126
11351	21-82126	22-82126
11352	21-82126	22-82126
11353	21-82197	22-82197
11354	21-82121	22-82121
11367	21-82142	22-82142
11368	21-82122	22-82117
11369	21-82147	22-82147
11378	21-82102	22-82099
11379	21-82096	22-82102
11380	21-82096	22-82102
11381	21-82129	22-82129
11382	21-82103	22-82100
11383	21-82103	22-82100
11384	21-82131	22-82131
11385	21-82114	22-82114
11386	21-82114	22-82114
11387	21-82111	22-82111
11389	21-82102-1	22-82099
11390	21-82112	22-82112
11391	21-82113	22-82113
11392	21-82113	22-82113
11400	21-82131	22-82131
11401	21-82129	22-82129
11402	21-82131	22-82131
11403	21-82131	22-82131
11404	21-82131	22-82131
11405	21-82119	22-82119
11406	21-82178	22-82178
11407	21-82131	22-82131
11408	21-82131	22-82131
11428	21-82201	
11429	21-82109	22-82109
11430	21-82117	22-82117
11431	21-82117	22-82117
11432	21-82105	22-82117
11433	21-82201	
11434	21-82099	22-82096
11448	21-82102-1	22-82099
11449	21-82102-1	22-82099
11496	21-82161	22-82161
11503	21-82087	22-82087

Lester#	DE#	SRE#
11505	21-82165	22-82165
11506	21-82103	22-82100
11508	21-82147	22-82147
11509	21-82198	22-82198
11514	21-82133	22-82132
11516	21-82127	22-82127
11517	21-82133	22-82133
11519	21-82131	22-82131
11520	21-82126	22-82126
11521	21-82126	22-82126
11523	21-82197	22-82197
11526	21-82201	
11527	21-82122	22-82117
11529	21-82198	22-82198
11530	21-82198	22-82198
11531	21-82116	22-82137
11532	21-82141	22-82141
11534	21-82099	22-82096
11549	21-82115	22-82115
11569	21-82108	22-82193
11570	21-82132	22-82132
11572	21-82120	22-82120
11573	21-82113	22-82113
11574	21-82146	22-82146
11575	21-82139	22-82139
11576	21-82139	22-82139
11577		22-82114
11580	21-82132	22-82132
11583	21-82102-1	22-82099
11584	21-82155	22-82155
11585	21-82182	22-82182
11588	21-82198	22-82198
11592	21-82149	22-82149
11594	21-82177	22-82177
11595	21-82131	22-82131
11598	21-82149	22-82149
11600	21-82113	22-82113
11604	21-82087	22-82087
11616	21-82184	22-82184
11620	21-82115	22-82115
11621	21-82156	22-82156
11622	21-82181	22-82181
11623	21-82156	22-82156
11624	21-82143	22-82143
11625	21-82156	22-82156
11626	21-82156	22-82156
11627	21-82143	22-82143
11628	21-82181	22-82181
11629	21-82143	22-82143
11630	21-82143	22-82143
11636	21-82176	22-82176
11641	21-82115	22-82115
11645	21-82118	22-82118
11664	21-82160	22-82160
11665	21-82160	22-82160
11666	21-82176	22-82176
11667	21-82179	22-82179
11679	21-82141	22-82141
11680	21-82096	22-82102
11681	21-82169	22-82169

Lester No. to Housing NO. Index

Lester#	DE#	SRE#	Lester#	DE#	SRE#			
11682	21-82169	22-82169	13914	21-82134	22-82134			
11686	21-82111	22-82111	13915	21-82134	22-82134			
11712	21-82161	22-82161	13918	21-82095	22-82093			
11749	21-82185	22-82183	13919	21-82136	22-82136			
11750	21-82161	22-82161	13923	21-82084	22-82084			
11751	21-82162	22-82162	13927	21-82089	22-82094			
11752	21-82161	22-82161	13979	21-82090	22-82090			
11753	21-82161	22-82161	13980	21-82087	22-82087			
11754	21-82096	22-82102	13981	21-82089	22-82089			
11755	21-82096	22-82102	13983	21-82085	22-82085			
11756	21-82102-1	22-82099	13984	21-82086	22-82086			
11759	21-82156	22-82156	13988	21-82102	22-82099			
11761	21-82178	22-82178	13994	21-82085	22-82145			
11762	21-82190	22-82190	14007	21-82148	22-82148			
11763	21-82143	22-82143	14009	21-82140	22-82103			
11764	21-82133	22-82133	14016	21-82190	22-82190			
11776	21-82157	22-82157	14019	21-82140	22-82103			
11777	21-82157	22-82157	14020	21-82140	22-82103			
11778	21-82195	22-82195	14021	21-82147	22-82147			
11779	21-82161	22-82161	14027	21-82096	22-82102			
11780	21-82205	22-82205	14486	21-82195	22-82195			
11785	21-82148	22-82148	14487	21-82195	22-82195			
11787	21-82147	22-82147	14883	21-82169	22-82169			
11790	21-82162	22-82162	20268	21-82160	22-82160			
11791	21-82162	22-82162	20276	21-82149	22-82149			
11792	21-82183	22-82183	20491	21-82108	22-82193			
11793	21-82183	22-82183	20838	21-82143	22-82143			
11794	21-82171	22-82148	21024	21-82192	22-82192			
11795	21-82169	22-82169	21025	21-82192	22-82192			
11798	21-82106	22-82106A	21029	21-82160	22-82160			
11867	21-82141	22-82141	21030	21-82160	22-82160			
11876	21-82122	22-82117	21032	21-82190	22-82190			
11878	21-82202	22-82202	21120	21-82186	22-82186			
11887	21-82200	22-82200	21154	21-82168	22-82168			
11918	21-82143	22-82143	21247	21-82172	22-82172			
11930	21-82170	22-82170	21248	21-82194	22-82194			
11931	21-82170	22-82170	21272	21-82161	22-82161			
11940	21-82196	22-82196	21353	21-82119	22-82119			
11941	21-82199	22-82199	21740	21-82191	22-82191			
11943	21-82200	22-82200	21858	21-82173	22-82173			
11951	21-82161	22-82161	22115	21-82161	22-82161			
11953	21-82175	22-82175	22138	21-82167	22-82167			
11963	21-82143	22-82143	22171	21-82199	22-82199			
11964	21-82169	22-82169	24028	21-82108	22-82193			
11965	21-82204	22-82203	41002	21-82186	22-82186			
11977	21-82199	22-82199	41004	21-82143	22-82143			
11980	21-82175	22-82175	41005	21-82143	22-82143			
11981	21-82148	22-82148	44000	21-82141	22-82141			
11982	21-82140	22-82103	44001	21-82141	22-82141			
11985	21-82198	22-82198	44004	21-82140	22-82103			
12660	21-82101	22-82098	44005	21-82143	22-82143			
12884	21-82179	22-82179	44006	21-82140	22-82103			
12886	21-82164	22-82164	44007	21-82143	22-82143			
12887	21-82185	22-82183	44014	21-82143	22-82143			
12893	21-82115	22-82115	44015	21-82188	22-82188			
13868	21-82180	22-82180	44019	21-82206	22-82206			
13870	21-82084	22-82084	44021	21-82109	22-82109			
13871	21-82084	22-82084		21-82205	22-82205			
13912	21-82124	22-82124						
13913	21-82124	22-82124						

OEM No. to Housing NO. Index

OEM#	DE#	SRE#
22949468	21-82208	
84122172	21-82207	
84331736	21-82207	
021080-0080	21-82198	22-82198
021080-2330	21-82198	22-82198
021080-2331	21-82198	22-82198
104210-111	21-82122	22-82117
104210-124	21-82113	22-82113
104210-145	21-82156	22-82156
104210-146		22-82114
104210-1470	21-82198	22-82198
104210-1540	21-82191	22-82191
104210-1750	21-82182	22-82182
104210-180	21-82111	22-82111
104210-1960	21-82169	22-82169
104210-1962	21-82169	22-82169
104210-200	21-82147	22-82147
104210-205	21-82110	22-82110
104210-207	21-82104	22-82101
104210-210	21-82104	22-82101
104210-214	21-82110	22-82110
104210-216	21-82135	22-82135
104210-225	21-82142	22-82142
104210-227	21-82131	22-82131
104210-2330	21-82176	22-82176
104210-234	21-82131	22-82131
104210-237	21-82131	22-82131
104210-2420	21-82108	22-82193
104210-2421	21-82108	22-82193
104210-2422	21-82108	22-82193
104210-265	21-82127	22-82127
104210-280	21-82114	22-82114
104210-287	21-82111	22-82111
104210-289	21-82144	22-82144
104210-2910	21-82176	22-82176
104210-2911	21-82176	22-82176
104210-2920	21-82181	22-82181
104210-2930	21-82181	22-82181
104210-294	21-82156	22-82156
104210-295	21-82156	22-82156
104210-297	21-82156	22-82156
104210-304	21-82089	22-82094
104210-306	21-82136	22-82136
104210-307	21-82136	22-82136
104210-308	21-82090	22-82090
104210-309	21-82095	22-82093
104210-310	21-82113	22-82113
104210-319	21-82147	22-82147
104210-3210	21-82163	22-82163
104210-3213	21-82163	22-82163
104210-326	21-82125	22-82125
104210-328	21-82116	22-82116
104210-329	21-82087	22-82087
104210-330	21-82166	22-82166
104210-3300	21-82166	22-82166
104210-331	21-82166	22-82166
104210-3310	21-82166	22-82166
104210-332	21-82147	22-82147
104210-333	21-82136	22-82136
104210-334	21-82116	22-82137

OEM#	DE#	SRE#
104210-338	21-82085	22-82145
104210-339	21-82085	22-82085
104210-344	21-82085	22-82085
104210-345	21-82089	22-82089
104210-346	21-82085	22-82145
104210-347	21-82086	22-82086
104210-350	21-82113	22-82113
104210-356	21-82106	22-82106A
104210-362	21-82089	22-82089
104210-365	21-82089	22-82089
104210-368	21-82085	22-82085
104210-369	21-82108	22-82193
104210-3691	21-82108	22-82193
104210-370	21-82108	22-82193
104210-375	21-82089	22-82089
104210-377	21-82113	22-82113
104210-379	21-82089	22-82089
104210-388	21-82088	22-82088
104210-389	21-82088	22-82088
104210-3920	21-82101	22-82098
104210-3921	21-82101	22-82104
104210-400	21-82085	22-82158
104210-403	21-82088	22-82088
104210-405	21-82154	22-82154
104210-409	21-82159	22-82159
104210-414	21-82128	22-82128
104210-4160	21-82163	22-82163
104210-418	21-82089	22-82089
104210-419	21-82089	22-82089
104210-420	21-82086	22-82086
104210-422	21-82130	22-82130
104210-429	21-82113	22-82113
104210-430	21-82113	22-82113
104210-431	21-82113	22-82113
104210-433	21-82128	22-82128
104210-435	21-82147	22-82147
104210-436	21-82166	22-82166
104210-4360	21-82166	22-82166
104210-437	21-82136	22-82136
104210-438	21-82116	22-82137
104210-441	21-82128	22-82128
104210-442	21-82128	22-82128
104210-443	21-82147	22-82147
104210-447	21-82104	22-82101
104210-448	21-82113	22-82113
104210-451	21-82085	22-82085
104210-454	21-82166	22-82166
104210-4540	21-82166	22-82166
104210-457	21-82104	22-82101
104210-464	21-82106	22-82106A
104210-468	21-82110	22-82110
104210-469	21-82113	22-82113
104210-470	21-82117	22-82117
104210-473	21-82087	22-82087
104210-479	21-82097	22-82088
104210-481	21-82097	22-82088
104210-487	21-82086	22-82086
104210-488	21-82088	22-82088
104210-492	21-82086	22-82086
104210-499	21-82135	22-82135

OEM#	DE#	SRE#
104210-504	21-82090	22-82090
104210-507	21-82135	22-82135
104210-508	21-82126	22-82126
104210-509	21-82126	22-82126
104210-510	21-82126	22-82126
104210-511	21-82085	22-82085
104210-512	21-82085	22-82145
104210-525	21-82144	22-82144
104210-533	21-82097	22-82088
104210-5360	21-82198	22-82198
104210-5361	21-82198	22-82198
104210-539	21-82147	22-82147
104210-540	21-82116	22-82116
104210-541	21-82144	22-82144
104210-543	21-82109	22-82109
104210-548	21-82114	22-82114
104210-549	21-82114	22-82114
104210-551	21-82104	22-82101
104210-563	21-82117	22-82117
104210-581	21-82111	22-82111
104210-582	21-82117	22-82117
104210-5840	21-82201	
104210-586	21-82105	22-82117
104210-589	21-82112	22-82112
104210-591	21-82113	22-82113
104210-592	21-82113	22-82113
104210-597	21-82122	22-82117
104210-600	21-82107	22-82107
104210-6050	21-82161	22-82161
104210-6051	21-82161	22-82161
104210-6052	21-82161	22-82161
104210-6070	21-82161	22-82161
104210-6071	21-82161	22-82161
104210-6072	21-82161	22-82161
104210-610	21-82115	22-82115
104210-6130	21-82178	22-82178
104210-6131	21-82178	22-82178
104210-614	21-82119	22-82119
104210-6150	21-82173	22-82173
104210-616	21-82118	22-82118
104210-6170	21-82178	22-82178
104210-6173	21-82178	22-82178
104210-6180	21-82099	22-82096
104210-6181	21-82099	22-82096
104210-6191	21-82197	22-82197
104210-622	21-82143	22-82143
104210-6240	21-82161	22-82161
104210-6250	21-82162	22-82162
104210-6251	21-82162	22-82162
104210-6254	21-82162	22-82162
104210-627	21-82141	22-82141
104210-634	21-82143	22-82143
104210-6411	21-82184	22-82184
104210-6420	21-82190	22-82190
104210-6440	21-82162	22-82162
104210-6441	21-82162	22-82162
104210-6442	21-82162	22-82162
104210-6500	21-82161	22-82161
104210-6501	21-82161	22-82161
104210-6502	21-82161	22-82161

OEM No. to Housing NO. Index

OEM#	DE#	SRE#
104210-6503	21-82161	22-82161
104210-6504	21-82161	22-82161
104210-6514	21-82161	22-82161
104210-6520	21-82161	22-82161
104210-6521	21-82161	22-82161
104210-6522	21-82161	22-82161
104210-656	21-82160	22-82160
104210-657	21-82160	22-82160
104210-6580	21-82162	22-82162
104210-660	21-82143	22-82143
104210-667	21-82143	22-82143
104210-6690	21-82179	22-82179
104210-6750	21-82161	22-82161
104210-6751	21-82161	22-82161
104210-6752	21-82161	22-82161
104210-6781	21-82178	22-82178
104210-6840	21-82167	22-82167
104210-6850	21-82208	
104210-6851	21-82208	
104210-686	21-82140	22-82103
104210-687	21-82140	22-82103
104210-6910	21-82200	22-82200
104210-6990		22-82204
104210-6991		22-82204
104210-811	21-82121	22-82121
104210-813	21-82147	22-82147
104210-8180	21-82165	22-82165
104210-823	21-82121	22-82121
104210-836		22-82148
104210-843	21-82131	22-82131
104211-0261	21-82206	22-82206
104211-031	21-82160	22-82160
104211-0500	21-82202	22-82202
104211-0501	21-82202	22-82202
104211-0670	21-82205	22-82205
104211-0671	21-82205	22-82205
104211-0672	21-82205	22-82205
104211-0720	21-82207	
104211-0721	21-82207	
104211-0760	21-82200	22-82200
104211-0761	21-82200	22-82200
104211-0971	21-82194	22-82194
104211-1151	21-82200	22-82200
104211-145	21-82156	22-82156
104211-160	21-82113	22-82113
104211-284	21-82133	22-82133
104211-3161	21-82195	22-82195
104211-3290	21-82195	22-82195
104211-3291	21-82195	22-82195
104211-3293	21-82195	22-82195
104211-330	21-82157	22-82157
104211-3470	21-82168	22-82168
104211-3541	21-82195	22-82195
104211-3761	21-82172	22-82172
104211-3910	21-82170	22-82170
104211-3960	21-82170	22-82170
104211-4160	21-82199	22-82199
104211-4170	21-82199	22-82199
104211-4310	21-82204	22-82203
104211-4420	21-82199	22-82199

OEM#	DE#	SRE#
104211-4510	21-82186	22-82186
104211-6840	21-82167	22-82167
104211-6841	21-82167	22-82167
104211-8000	21-82177	22-82177
104211-813	21-82147	22-82147
104211-834	21-82148	22-82148
104211-835	21-82148	22-82148
104211-8360	21-82171	22-82148
104211-8790	21-82175	22-82175
104211-8900	21-82188	22-82188
104211-8901	21-82188	22-82188
104211-8902	21-82188	22-82188
104211-8903	21-82188	22-82188
104211-911	21-82148	22-82148
121000-2520	21-82180	22-82180
421000-001	21-82084	22-82084
421000-002	21-82084	22-82084
421000-004	21-82124	22-82124
421000-005	21-82134	22-82134
421000-0060	21-82180	22-82180
421000-0061	21-82180	22-82180
421000-0062	21-82180	22-82180
421000-010	21-82124	22-82124
421000-011	21-82134	22-82134
421000-012	21-82084	22-82084
421000-014	21-82098	22-82095
421000-015	21-82134	22-82134
421000-018	21-82084	22-82084
421000-019	21-82138	22-82138
421000-020	21-82134	22-82134
421000-021	21-82102-1	22-82099
421000-022	21-82084	22-82084
421000-0230	21-82180	22-82180
421000-0232	21-82180	22-82180
421000-025	21-82103	22-82100
421000-026	21-82103	22-82100
421000-028	21-82102-1	22-82099
421000-030	21-82098	22-82095
421000-032	21-82124	22-82124
421000-033	21-82103	22-82100
421000-034	21-82103	22-82100
421000-036	21-82123	22-82123
421000-037	21-82134	22-82134
421000-039	21-82129	22-82129
421000-041	21-82102-1	22-82099
421000-043	21-82124	22-82124
421000-044	21-82124	22-82124
421000-046	21-82129	22-82129
421000-047	21-82124	22-82124
421000-048	21-82145	22-82095
421000-049	21-82084	22-82084
421000-050	21-82124	22-82124
421000-051	21-82102-1	22-82099
421000-052	21-82102-1	22-82099
421000-053	21-82124	22-82124
421000-054	21-82098	22-82095
421000-055	21-82123	22-82123
421000-056	21-82098	22-82095
421000-058	21-82102-1	22-82099
421000-059	21-82124	22-82124

[illegible]

Metro No. to Page No. Index

Metro#	Pg	Metro#	Pg	Metro#	Pg	Metro#	Pg	Metro#	Pg	Metro#	Pg
10-202140S	79	21-82151	3	22-82096	20	22-82161	16	24CP-82005	30	30-82018	45
10-304240	79	21-82154	1	22-82098	29	22-82162	16	24CP-82006	30	30-82023	45
21-82084	2	21-82155	3	22-82099	17	22-82163	21	24CP-82007	31	30-82024	45
21-82085	12	21-82156	5	22-82100	17	22-82164	19	24CP-82008	31	30-82025	45
21-82086	12	21-82157	13	22-82101	25	22-82165	26	24CP-82009	31	30-82026	45
21-82087	11	21-82159	5	22-82102	17	22-82166	19	24CP-82010	31	30-82027	45
21-82088	12	21-82160	6	22-82103	22	22-82167	21	24CP-82011	31	30-82033	45
21-82089	12	21-82161	1	22-82104	29	22-82168	24	24CP-82012	32	30-82034	45
21-82090	15	21-82162	1	22-82105	28	22-82169	23	24CP-82013	32	31-82038	46
21-82095	11	21-82163	6	22-82106A	16	22-82170	24	24CP-82014	32	31-82038A	46
21-82096	2	21-82164	4	22-82106B	16	22-82172	26	24CP-82015	32	31-82040	46
21-82097	12	21-82165	13	22-82107	22	22-82173	27	24CP-82016	32	31-82041	46
21-82098	2	21-82166	9	22-82108	28	22-82175	28	24CP-82017	32	31-82042	46
21-82099	5	21-82167	6	22-82109	20	22-82176	21	24CP-82019	33	31-82043	46
21-82101	15	21-82168	11	22-82110	25	22-82177	19	24CP-82020	33	31-82044	46
21-82102-1	2	21-82169	9	22-82111	28	22-82178	27	24CP-82021	33	31-82045	46
21-82103	2	21-82170	11	22-82112	24	22-82179	21	24CP-82022	33	31-82046	46
21-82104	12	21-82171	9	22-82113	24	22-82180	19	24CP-82023	33	31-82047	47
21-82106	1	21-82172	13	22-82114	25	22-82181	21	24CP-82024	33	31-82048	47
21-82107	8	21-82173	13	22-82115	20	22-82182	19	24CP-82025	34	31-82049	47
21-82108	15	21-82175	15	22-82116	22	22-82183	19	24CP-82026	34	31-82050	47
21-82109	5	21-82176	6	22-82117	20	22-82184	21	24CP-82027	34	31-82051	47
21-82110	12	21-82177	4	22-82118	22	22-82186	27	24CP-82028	34	31-82052	47
21-82111	15	21-82178	14	22-82119	25	22-82188	23	24CP-82029	34	31-82053	47
21-82112	11	21-82179	6	22-82120	17	22-82190	28	24CP-82030	34	31-82054	47
21-82113	11	21-82180	4	22-82121	26	22-82191	24	24CP-82031	35	31-82055	47
21-82114	12	21-82181	6	22-82123	17	22-82192	19	24CP-82032	35	31-82056	48
21-82115	5	21-82182	4	22-82124	17	22-82193	28	24CP-82033	35	31-82057	48
21-82116	8	21-82183	4	22-82125	22	22-82194	27	24CP-82040	35	31-82058	48
21-82117	5	21-82184	6	22-82126	26	22-82195	27	24CP-82042	35	31-82059	48
21-82118	8	21-82185	4	22-82128	22	22-82196	19	24CP-82043	36	31-82060	48
21-82119	12	21-82186	14	22-82129	17	22-82197	28	24CP-82045	35	31-82061	48
21-82120	2	21-82188	9	22-82130	22	22-82198	28	24CP-82046	36	31-82062	48
21-82121	13	21-82190	15	22-82131	26	22-82199	27	24CP-82047	36	31-82063	48
21-82122	5	21-82191	11	22-82132	18	22-82200	21	24CP-82048	36	31-82064	48
21-82123	2	21-82192	4	22-82133	26	22-82202	21	24CP-82049	36	31-82065	49
21-82124	2	21-82194	14	22-82134	18	22-82203	24	24CP-82051	36	31-82066	49
21-82125	8	21-82195	14	22-82135	22	22-82204	29	24CP-82052	37	31-82067	49
21-82126	13	21-82196	4	22-82136	22	22-82205	23	24CP-82053	37	31-82208	50
21-82128	8	21-82197	15	22-82137	23	22-82206	23	24CP-82054	37	31-82209	50
21-82129	2	21-82198	15	22-82138	18	24-125	39	24CP-82055	37	31-82210	50
21-82130	8	21-82199	14	22-82139	18	24-171	39	24CP-82056	37	31-82303	50
21-82131	13	21-82200	6	22-82141	20	24-184Y	39	24CP-82057	37	31-82501	50
21-82132	3	21-82201	6	22-82142	23	24-222Y	39	24CP-CAP001	38	31-82502	50
21-82133	13	21-82202	7	22-82143	20	24-304	40	24CP-CAP002	38	31-82503	50
21-82134	3	21-82204	11	22-82144	23	24-305	40	24DP-82005	30	32-817004A-N	51
21-82135	8	21-82205	9	22-82145	26	24-315B	40	24DP-82010	31		51
21-82136	8	21-82206	10	22-82146	18	24-319	40	27-82018	42	32-817004A-P	51
21-82138	3	21-82207	10	22-82147	23	24-323	40	27-82020	42		51
21-82139	3	21-82208	10	22-82148	23	24-325	40	27-82022	42	32-82003N	51
21-82140	9	22-82084	17	22-82149	18	24-331Y	41	27-82023	42	32-82003P	51
21-82141	5	22-82085	25	22-82151	18	24-350	41	27-82024	42	32-82004N	51
21-82142	8	22-82086	25	22-82152	18	24-352	41	27-82026	43	32-82004P	51
21-82143	5	22-82087	24	22-82154	16	24-354	41	27-82027	43	32-915002	52
21-82144	9	22-82088	25	22-82155	18	24-371	41	27-82029-1	43	32-915003	52
21-82145	3	22-82089	25	22-82156	20	24-374Y	41	27-82030	43	35-82084-1	52
21-82146	3	22-82090	28	22-82157	26	24CP-82001	30	27-82031-1	43	35-82086	52
21-82147	9	22-82093	24	22-82158	26	24CP-82002	30	28-82012-4	44	35-82087	52
21-82148	9	22-82094	25	22-82159	20	24CP-82003	30	28-82017-2	44	35-82088	52
21-82149	3	22-82095	17	22-82160	20	24CP-82004	30	30-82017	45	35-82089	52

Metro No. to Page No. Index

Metro#	Pg	Metro#	Pg	Metro#	Pg	Metro#	Pg	Metro#	Pg	Metro#	Pg
35-82090	53	42-82066	63	46-82185	68	46-82257	74	84-82117-D	90		
35-82092	53	42-82068	63	46-82186	68	46-82260	74	85-82001F-1	89		
35-82094	53	42-82069	63	46-82187	68	46-82261	74	85-82001F-CCW	89		
35-82095	53	42-82070	63	46-82188	68	46-82262	74	85-82002	89		
35-82097	53	42-82071	63	46-82189	69	46-82263	74	85-82002F	89		
35-82099	53	42-82072	63	46-82190	69	46-82264	74	85-82003	89		
35-82100	53	42-82073	63	46-82191	69	46-82265	75	85-82003F	89		
35-82101	53	42-82075	63	46-82192	69	46-82266	75	85-82012	89		
35-82102	53	42-82076	63	46-82194	69	46-82267	75	85-82012-1	90		
35-82103	54	42-82081	64	46-82195	69	46-82268	75	85-82012F	85		
35-82104	54	42-82082	64	46-82196	58	46-82269	82	85-82013	85		
35-82105	54	42-82084	64	46-82197	79	46-82270	75	85-82025	86		
35-82106	54	42-82085	64	46-82198	58	46-82271	75	85-82025-1	85		
35-82107	54	42-82086	64	46-82200	69	46-82272	75	85-82026	85		
35-82108	54	42-82088	64	46-82201	69	46-82273	75	85-82027	85		
35-82109	54	42-82089	64	46-82202	69	46-82274	75	85-82028	86		
35-82110	55	42-82090	64	46-82203	70	46-82275	76	85-82029	90		
35-82111	55	42-82091	64	46-82204	70	46-82276	76	85-82030	86		
35-82112	55	42-82092	65	46-82205	70	46-82277	76	85-82032	86		
35-82113	55	42-82093	65	46-82206	79	46-82278	76	85-82033	86		
35-82115	55	42-82096	65	46-82207	70	46-82279	76	85-82034	86		
35-82116	55	42-82097	65	46-82208	70	46-82280	76	85-82035	38		
35-82117	55	42-82098	65	46-82210	70	46-82281	76	85-82137	38		
35-82118	56	42-82099	65	46-82211	58	46-82282	76	TL24-007	38		
35-82119	56	42-82100	80	46-82213	58	46-82283	76	TL24-008			
35-82120	56	42-82101	81	46-82214	70	46-82284	77	TL24-021			
35-82121	56	4604-8023	81	46-82215	58	46-82285	77				
35-82122	56	4604-8024	81	46-82216	71	46-82286	77				
35-82123	56	4604-8025	81	46-82217	71	46-82287	77				
35-82124	57	4604-8026	81	46-82218	71	46-82288	77				
35-82125	57	4604-8027	82	46-82219	71	46-82289	77				
35-82126	57	4604-8028	82	46-82220	71	46-82290	77				
35-82127	57	4604-8029	82	46-82222	71	46-82291	82				
35-82128	57	4604-8030	82	46-82223	71	46-82293	77				
35-82129	57	4604-8031	79	46-82224	71	46-82294	77				
35-82130	59	4604-8032	81	46-82225	71	46-82295	78				
35-82131	59	46-82003	81	46-82226	72	46-82297	78				
38-82001-1	59	46-82005	81	46-82227	72	46-82300	79				
39-82005	59	46-82006	79	46-82228	72	46-82301	87				
39-82007	59	46-82023	80	46-82229	72	6-30340K	87				
39-82008-1	59	46-82039	66	46-82230	58	84-82001	87				
39-82010	60	46-82099	66	46-82231	72	84-82002	87				
39-82011	60	46-82164	66	46-82234	72	84-82003	87				
41-82003	60	46-82165	66	46-82235	72	84-82005	87				
41-82007	60	46-82166	66	46-82236	72	84-82008	87				
41-82008	61	46-82167	66	46-82237	72	84-82023	83				
41-82009	61	46-82168	66	46-82238	73	84-82026	83				
42-82048	61	46-82169	58	46-82239	73	84-82050	83				
42-82049	61	46-82170	66	46-82240	73	84-82051	84				
42-82050	61	46-82172	66	46-82241	73	84-82052	84				
42-82051	61	46-82173	67	46-82242	73	84-82053	84				
42-82053	61	46-82174	67	46-82243	73	84-82054	84				
42-82056	62	46-82175	67	46-82244	82	84-82055	87				
42-82057	62	46-82176	67	46-82245	82	84-82056	87				
42-82058	62	46-82177	67	46-82246	73	84-82057	88				
42-82059-1	62	46-82179	68	46-82247	73	84-82058	83				
42-82060	62	46-82180	68	46-82248	73	84-82068	88				
42-82061	62	46-82181	68	46-82249	74	84-82069	88				
42-82063	62	46-82182	68	46-82250	74	84-82070	88				
42-82064	62	46-82183	68	46-82251	74	84-82071	90				

Metro No. to Page No. Index

[illegible]